

CATALOGUE



 **ECLISSE**[®]
SLIDING POCKET DOOR SYSTEMS



**Real changes are born
of a willingness
to look further.**

*"I have always wanted to create a
pocket door system which is easy
to install and will last forever.*

*I am inspired by the idea of
constantly improving the
performance of this product,
because I want to satisfy everyone
who sells it, installs it and uses it.*

*This is what drives me and
enables me to always
Look Further."*

Luigi De Faveri
Founder of ECLISSE

OUR FUTURE IS MADE OF PEOPLE

FOR 30 YEARS WE HAVE BEEN
LOOKING FURTHER WITH YOU

At ECLISSE we have a strong orientation towards people, innovation and continuous improvement.

Ours is a story of listening and study, of continuous work on the product, of incessant search for quality, in order to acquire more and more expertise in the field.

Look further the state of the art to imagine the innovation no one has thought of yet, to generate the next generation of technologies that will improve the functionality and aesthetics of our products.

We are driven and stimulated by the ability to dream of designers, architects and individuals who love interior design, but also by the technical needs of builders and installers. The challenges presented by their needs and visions are the driving force behind our growth.

Looking Futher is the reflection of our philosophy: a promise we repeat every day, a commitment to see what others do not see, the meticulous attention to detail, the desire to take nothing for granted. The synthesis of our work, what differentiates us.

This is the essence of ECLISSE.



TOWARDS PERFECTION

POCKET DOOR SYSTEMS DESIGNED TO WORK PERFECTLY

The hallmark of our products is uncompromisingly high quality.

We maintain a constant contact with users, designers and installers, and we use their insights constantly to develop new ideas and extraordinary solutions.

Our objective is to develop and manufacture pocket door systems which are simple to install, functionally flawless and easy to maintenance.

We set out to revolutionise the concept of the sliding pocket door system and so enable any type of frame to be hidden. We also decided to redefine the role of the frame for flush hinged doors.

Choosing ECLISSE is to choose a reliable, sturdy, innovative product.



A REASONED CHOICE GETTING MORE SPACE

When you use a hinged door...

Compared to conventional hinged doors, sliding pocket doors offer technical details in every living space. It is estimated that in an average house, more than 8% extra space can be freed by the use of sliding doors; that's 8 sqm extra space in a 100 sqm apartment!

ECLISSE developed an elegant, practical alternative to hinged doors: a framework that forms part of the wall and allows your doors to slide effortlessly inside the wall. Sliding pocket doors take up no living space. Whether you are designing new-build or refurbishment this is a modern and intelligent way to exploit the space using the latest development in door closures. Also, ECLISSE frames can host any conventional door of your choice. Your style is up to you!


Use an ECLISSE sliding door and...

The frame is made from top quality materials and components to give a long, trouble-free life and the patented extractable track system can be removed at any time for extraordinary maintenance without breaking into the wall.

ECLISSE has been manufacturing frames for sliding pocket doors since 1989 and it is the largest worldwide producer of these integrated systems.


This has been achieved through a constant technical innovation with high performance materials and a finished product that is easy to install and gives long term customer satisfaction.

The product range offers a wide variety of applications including single doors, double doors, telescopic sliding doors, side by side doors and even curved doors!

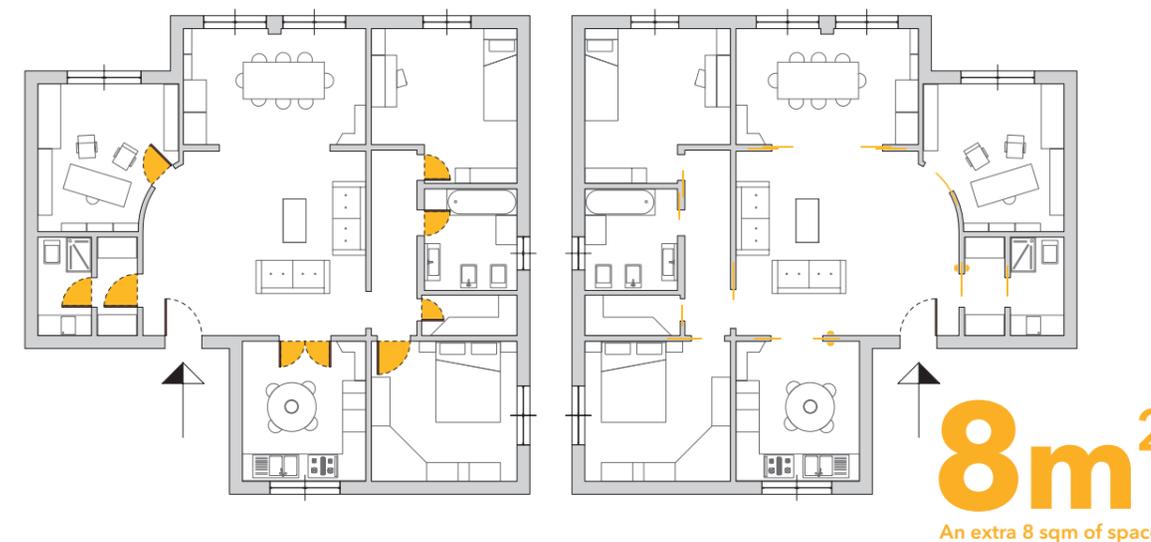

Reasons not to use a hinged door

- Restricts your planning options
- Wastes lots of space
- Difficult to use in small areas

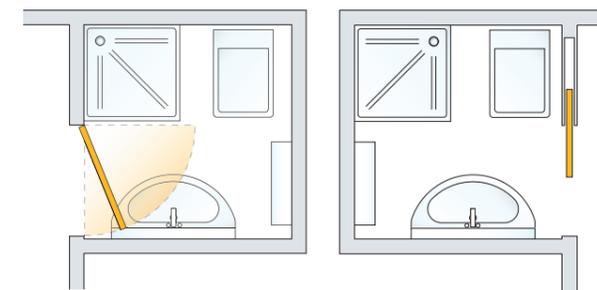

Reasons to choose ECLISSE

- More freedom in your layout
- Uses all the available space
- Opens up smaller areas



A SOLUTION FOR EVERY NEED

OUR PRODUCTION OF POCKET AND HINGED DOOR FRAMES

Since its beginning, ECLISSE has been and remains dedicated to advancing the design of the sliding door systems. The sliding door frame was not considered to be a simple structure for holding a door, but rather a complex system which must above all communicate with the surrounding structure in which it is fitted.

This realisation led to the development of a range of specific sliding pocket door systems for solid and stud walls.

The solid wall versions are immensely strong, and serve as more than a simple replacement for brickwork. They are capable of forming an integral part of the structure.

On the other hand, versions for stud wall have an open, lightweight but solid structure which can be perfectly incorporated in the studwork.

Our approach to developing frames for hinged doors is totally unique: a single universal construction designed for use with all wall types.

With one eye permanently fixed on technology and the other on design, ECLISSE adopted an approach for developing solutions that could fit a range of different styles.

Departing from the original, rather traditional solutions with profiles designed to support jambs and architraves, flush sliding pocket door systems and hinged door frames were introduced which dispense with the need for exterior mouldings.

ECLISSE reinvented the concept of the frame, expanding it beyond the wall and rethinking its shape, exploring new surfaces and finishing materials, transforming a structural component into a true design element.

Traditional, modern, contemporary. The choice is yours.

THE VALUE OF THE UNSEEN

SMALL DETAILS REVEAL MAJOR INNOVATIONS

ECLISSE S.r.l. designs and manufactures sliding pocket door systems, frames for hinged door, accessories and electric automations for doors in accordance with the UNI EN ISO 9001. For this reason, the company created a Research and Development team, which promotes voluntary testing under the observation of Italian CSI laboratory. ECLISSE operates in compliance with the UNI EN ISO 14001, which defines the development of an effective Environmental Management System.

This certification ensures the company's commitment to preventing pollution and ensuring environmental compatibility of its sliding systems and frames. ECLISSE also chose to voluntarily adopt a Safety Management System and Occupational Health in conformity with the norm OHSAS 18001. OHSAS certification identifies an internationally recognized standard that aim at the protection of the health and safety of company employees and all those who are exposed to the company's activities.

DURABILITY TEST FOR RUNNERS (UNI EN 1527)

Tests carried out in accordance with the European Standard UNI EN 1527 on 100 and 150 kg payload runners. After 100,000 opening and closing cycles (equal to 30 years of use) the runners showed no significant traces of wear or damages whatsoever and still worked.

FULLY EXTRACTABLE TRACK

It is made from the more robust aluminium alloy 6060 (UNI 9006:1) and protected by a 10 µm anodic layer with a T5 thermic treatment.

STRONG SHOCK RESISTANCE (UNI EN 1629)

An ECLISSE sliding door system was left completely undamaged after passing the European recognised shock test: a 30 kg bag crashed into it from different heights in accordance with the UNI EN 1629:2000 requirements.

CAPACITY LOAD TEST FOR ECLISSE EWOLUTO®

The sliding pocket door system ECLISSE EWOLUTO® has been tested in order to assess its static load bearing capacity. Using a traditional mechanical two-points wall anchorage a capacity of up to 180 kg (close to the wall) is guaranteed, while a chemical anchorage can reach a capacity of 360 kg against the wall and 60 kg at a distance 600 mm from the wall. The maximum capacity of a handle bar, fixed with a four-points chemical anchorage, is 100 kg at a distance of 600 mm from the wall.

ANTI-CORROSION RESISTANCE (UNI EN 1670)

An ECLISSE sliding pocket door system with a three-layer protection (galvanization, primer coating and epoxy paint coating) showed no sign of rusting after 240 hours of salt spray test in a 95% humidity environment with a 5% NaCl solution (CSI test).



FULLY EXTRACTABLE TRACK



STRONG SHOCK RESISTANCE



ANTI-CORROSION RESISTANCE




LOAD-BEARING SYSTEM ECLISSE EWOLUTO®



EXTREMELY DURABLE RUNNERS

ECLISSE WORLD

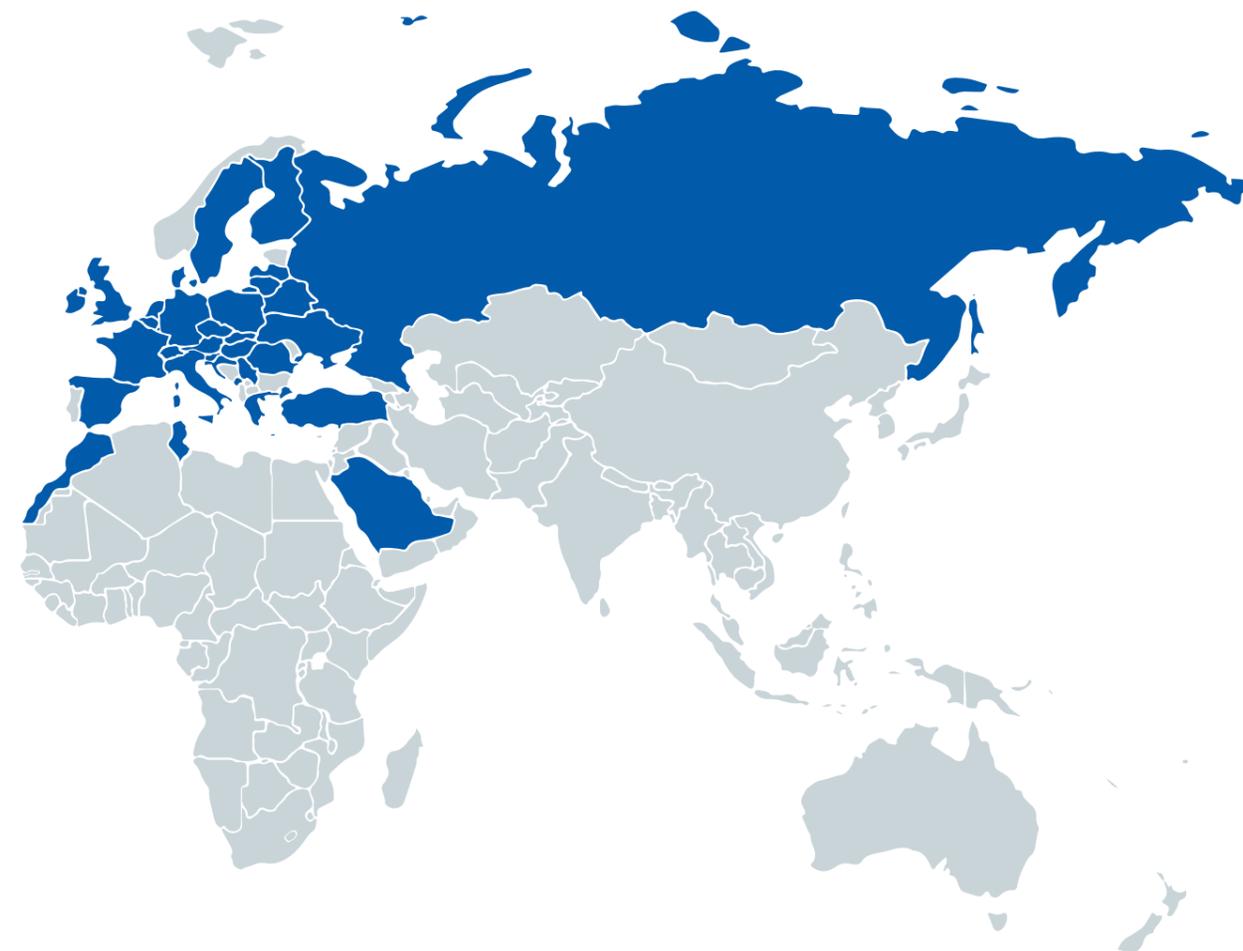

ECLISSE S.r.l. Pieve di Soligo - Italy

ECLISSE France SAS
[Quimper - France](#)

ECLISSE Polska Sp. z o.o.
[Rokitki - Poland](#)

ECLISSE Wien GmbH
[Wien - Austria](#)

ECLISSE ČR, s.r.o.
[Praha - Czech Republic](#)

ECLISSE Iberia S.L.
[Ripoll Barcelona - Spain](#)

ECLISSE BRASIL
Trading e Logística LTDA.
[Vila Velha - Brazil](#)

ECLISSE Deutschland GmbH
[Darmstadt - Germany](#)

ECLISSE Slovakia, s.r.o.
[Banská Bystrica - Slovakia](#)

ECLISSE EST S.r.l.
[Bucarest - Romania](#)

ECLISSE UK Ltd.
[Grantham - United Kingdom](#)

ECLISSE NORTH AMERICA, LLC
[Los Angeles - United States of America](#)

Veneto Porte Plusz Kft.
[Székesfehérvár - Hungary](#)

HÄFELE TÜRKIYE A.Ş.
[Istanbul - Turkey](#)

Marsica Special Doors & Frames BV
[Voorhout - Netherlands](#)

TDV - Vishera Group
[Moscow - Russia](#)

Muotolevy Rakennustuotteet Oy
[Nummela - Finland](#)

TechnoBat
[Tunis - Tunisia](#)

ECLISSE Scandinavia ApS
[Tommerup - Denmark](#)

OVOCONCEPT d.o.o.
[Belgrade - Serbia](#)

Linear System GmbH
[Fruthwilen - Switzerland](#)

UAB "GSV Group" - Vituko Durys
[Vilnius - Lithuania](#)

SFAKSTAR - Quincaillerie de porte
et accessoires de meubles
[Casablanca - Morocco](#)

ECB Ltda.
[Santiago - Chile](#)

Miroljub Teinovič (Agent)
[Slovenia | Croatia | Montenegro](#)

Valantis Grammenopoulos (Agent)
[Greece | Cyprus](#)

Alexander Martynov (Agent)
[Ukraine](#)

ECLISSE began manufacturing sliding pocket door systems in 1989 in its factory near Treviso, Italy, and became an immediate success.

This rapid success was based on highly innovative product design and advanced production techniques. Better products and design quickly led to expansion throughout Europe where ECLISSE has become the largest producer of these systems.

Its aim is to develop a construction technology characterized by innovation and excellence of quality standards. With more than 40 patents so far, ECLISSE frames revolutionised the way we think about sliding door systems. Doors slide effortlessly inside the wall, opening up the room and changing your perception of space.

ECLISSE is a leading company in its sector in Italy and worldwide, marketing its products all over Europe and in the main non-European countries through a commercial network born in 1995 with the opening of the first sister company in Quimper, France.

Further subsidiaries were later established in Poland, Austria, Czech Republic, Slovakia, Spain, Brazil, Germany, Romania and UK.

In all the other countries ECLISSE is present with distributors and/or agents.


MOVING TOWARDS PERFECTION



● **1989** Luigi De Faveri establishes ECLISSE S.r.l. in Falzé di Piave, Treviso. The first models to be produced are ECLISSE SINGLE, ECLISSE DOUBLE, ECLISSE TELESCOPIC, ECLISSE UNILATERAL and ECLISSE NOVANTA.



● **1991** In 1991, the first patent is obtained: weld-free attaching system that fastens the mesh to the counterframe (plaster version). The absence of welds prevents the formation of rust and possible mesh detachments.

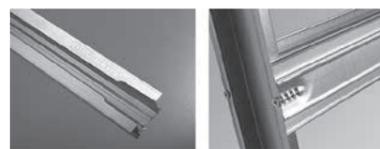

● **1992** The extractable track is patented. In the same year, ECLISSE launches its stud wall kit with aluminium profiles and screws.

● **1996** In 1996 the company moves to Pieve di Soligo, Treviso, in a newly built dedicated structure. In the same year, ECLISSE inaugurates the first sister company under the name of **ECLISSE France SAS**, in Quimper.



● **2000** ECLISSE patents the under frame tear-off profile, to correct possible differences in height between the finished floor level and the bottom of the installed counterframe can be adjusted. The expansion and consolidation in international markets leads ECLISSE to Poland. **ECLISSE Polska Sp. z.o.o** is opened in Tczew. Also, the first website is launched.

● **2001** The distribution network expands in the Austrian territory: **ECLISSE Wien GmbH** is established in Vienna.



● **2002** ECLISSE revolutionises the concept of the counterframe and patents ECLISSE LUCE, the first system designed to allow the insertion of electrical wiring. The growth of the group brings the company to the opening of **ECLISSE ČR, s.r.o.** in Prague.



● **2003** In 2003, the ECLISSE CIRCULAR model is introduced: the first counterframe for curved sliding pocket doors on the market.



● **2005** The alignment bar keeps the counterframe perfectly aligned during installation. It provides a solid joint between the frame and the metal stop jamb, guaranteeing a perfect squared positioning.



● **2006** ECLISSE consolidates its presence in Spain and sets up **ECLISSE Iberia S.L.** in Barcellona. The first version of sliding pocket door system without jambs and architraves is marketed: it is called ECLISSE SYNTESIS® LINE. **ECLISSE Slovakia, s.r.o.** is established in Banská Bystrica.

● **2007** In 2007, **ECLISSE BRASIL - Trading e Logistica LTDA.** (Vila Velia) is the first ECLISSE subsidiary overseas.

● **2008** The expansion continues in Germany with **ECLISSE Deutschland GmbH.**

● **2009** **ECLISSE EST S.r.l.** in Bucharest officially becomes the Romanian subsidiary.



● **2010** New patent: ECLISSE EWOLUTO®, the counterframe that allows to hang wall cabinets, shelves and furniture. The ECLISSE showroom in Milan is the first exhibition space devoted entirely to the sliding systems.



● **2012** ECLISSE SYNTESIS® LUCE is the pocket door without jambs and architraves prepared for the insertion of electrical wiring. In Prague, a new ECLISSE showroom of over 100 sqm is inaugurated.



● **2013** ECLISSE SYNTESIS® FLUSH COLLECTION is the complete modular system for flush walls that now includes both sliding pocket door systems and flush hinged doors.



● **2014** ECLISSE SHODŌ COLLECTION is the first integrated system for sliding pocket doors and flush hinged doors where jambs, architraves and baseboards are installed flush to the wall, with no interruption. ECLISSE opens its showroom in Perugia, Italy.



● **2015** ECLISSE SYNTESIS® TECH is the solution that completes ECLISSE SYNTESIS® FLUSH COLLECTION and that allows to contain service rooms. Wiring, plumbing, electrical systems and even closets can now be hidden discreetly inside the wall.

● **2017** ECLISSE opens its showrooms in Pescara, Italy, and in Munich. Not simple showrooms but refence points for architects, interior designers and private customers. Places open to training sessions and to the development of synergies with all the players.



● **2018** ECLISSE SYNTESIS® BATTENTE GLASS and ECLISSE ACOUSTIC are launched. Technology in the service of design and living comfort.



● **2019** ECLISSE 40 is born! The door frame is shown for the first time: it emerges from the wall leaving a mark, becoming a discreet and yet strong presence. Inclined at 40 degrees, the frame is no longer just a functional structure, but a decorative element itself. **ECLISSE UK Ltd.** officially becomes the 10th subsidiary.



● **2019** ECLISSE's 30th Anniversary. ECLISSE celebrates its 30 years on January 10th.




● **2020** Always by the side of the installer. Resin-coated profiles and pre-drilled horizontal bars are two clever innovations which reduce installation times for pocket door systems, with no compromises on the final result.




● **2021** The innovative ECLISSE DELTA inclined skirting board and the decorative aluminium profile ECLISSE MIMESI for flush pocket doors enrich ECLISSE's range of interior furnishing solutions. ECLISSE's latest showroom opens in Naples.

ECLISSE CLASSIC COLLECTION


SYSTEMS WITH JAMBS AND ARCHITRAVES




ECLISSE
SINGLE
30 - 31




ECLISSE
DOUBLE
32 - 33




ECLISSE
LUCE SINGLE
36 - 37




ECLISSE
LUCE DOUBLE
38 - 41




ECLISSE
EWOLUTO® SINGLE
44



ECLISSE
EWOLUTO® DOUBLE
45




ECLISSE
TELESCOPIC SINGLE
48 - 49




ECLISSE
TELESCOPIC DOUBLE
50 - 51




ECLISSE
CIRCULAR SINGLE
54 - 55



ECLISSE
CIRCULAR DOUBLE
56 - 57




ECLISSE
UNILATERAL
60 - 61




ECLISSE
NOVANTA
64 - 65

ECLISSE SYNTESIS® FLUSH COLLECTION


SYSTEMS WITHOUT JAMBS AND ARCHITRAVES




ECLISSE
SYNTESIS® LINE SINGLE
80 - 81




ECLISSE
SYNTESIS® LINE DOUBLE
82 - 83




ECLISSE
SYNTESIS® LUCE SINGLE
86 - 87




ECLISSE
SYNTESIS® LUCE DOUBLE
88 - 89



ECLISSE
SYNTESIS® LINE BATTENTE
94




ECLISSE
SYNTESIS® LINE BATTENTE DOUBLE
97



ECLISSE
SYNTESIS® BATTENTE GLASS
103

ECLISSE 40 COLLECTION

SYSTEMS FOR SPLAYED FRAMES



ECLISSE
40 SINGLE
120 - 121



ECLISSE
40 DOUBLE
124 - 125

ECLISSE CLASSIC COLLECTION

SYSTEMS WITH JAMBS AND ARCHITRAVES

ECLISSE CLASSIC COLLECTION	20
ECLISSE SIZE GUIDE	28
ECLISSE SINGLE	30
ECLISSE DOUBLE	32
ECLISSE LUCE	34
ECLISSE EWOLUTO®	42
ECLISSE TELESCOPIC	46
ECLISSE CIRCULAR	52
ECLISSE UNILATERAL	58
ECLISSE NOVANTA	62
ECLISSE HOIST	66
ECLISSE TWICE	68
ECLISSE ACOUSTIC	70

ECLISSE SYNTESIS® FLUSH COLLECTION

SYSTEMS WITHOUT JAMBS AND ARCHITRAVES

ECLISSE SYNTESIS® FLUSH COLLECTION	74
ECLISSE SYNTESIS® LINE	78
ECLISSE SYNTESIS® LUCE	84
ECLISSE SYNTESIS® LINE BATTENTE	90
ECLISSE SYNTESIS® LINE BATTENTE with ELECTRIC STRIKE	98
ECLISSE SYNTESIS® LINE BATTENTE INCLINED	99
ECLISSE SYNTESIS® BATTENTE GLASS	100
FLUSH WALL CLOSURES	104
ECLISSE SYNTESIS® AREO	104
ECLISSE SYNTESIS® TECH	107
ECLISSE MIMESI	110

ECLISSE 40 COLLECTION

SYSTEMS FOR SPLAYED FRAMES

ECLISSE 40 COLLECTION	111
ECLISSE 40 SINGLE	118
ECLISSE 40 DOUBLE	122

BASEBOARDS

BASEBOARD	127
ECLISSE DELTA	128
ECLISSE SYNTESIS® BASEBOARD	130

ECLISSE DOORS

ECLISSE DOORS	133
DOORS - ECLISSE CLASSIC	134
DOORS - ECLISSE SYNTESIS® FLUSH	140
DOORS - ECLISSE 40	148

HANDLES

HANDLES and LOCK KITS	151
-----------------------	-----

ACCESSORIES and HARDWARE

ACCESSORIES	165
HARDWARE	179

WARRANTY

ECLISSE WARRANTY	180
------------------	-----

ECLISSE CLASSIC COLLECTION

WITH JAMBS AND ARCHITRAVES



ECLISSE SINGLE
Sliding pocket door system for single door

30



ECLISSE DOUBLE
Sliding pocket door system for double door

32



ECLISSE LUCE SINGLE
Wiring-ready sliding pocket door system for single door

36



ECLISSE LUCE DOUBLE
Wiring-ready sliding pocket door system for double door

38



ECLISSE EWOLUTO® SINGLE
Sliding pocket door system for single door that can accommodate wall-mounted furniture and shelving on both sides

44



ECLISSE EWOLUTO® DOUBLE
Sliding pocket door system for double door that can accommodate wall-mounted furniture and shelving on both sides

45



ECLISSE TELESCOPIC SINGLE
Sliding pocket door system for two parallel doors disappearing into the same pocket

48



ECLISSE TELESCOPIC DOUBLE
Sliding pocket door system for two couples of parallel doors disappearing into the same pocket

50



ECLISSE CIRCULAR SINGLE
Sliding pocket door system for single curved door

54



ECLISSE CIRCULAR DOUBLE
Sliding pocket door system for double curved door

56



ECLISSE UNILATERAL
Two independent sliding doors into the same pocket

60



ECLISSE NOVANTA
Sliding pocket door system for sectional door: half pocket, half hinged

64

ECLISSE CLASSIC COLLECTION

WITH JAMBS AND ARCHITRAVES



1

PERFECT COHESION

The only one with the protruding knurled plaster mesh: connecting the wall and the frame, it offers an increased grasp and avoids cracks, for an imperceptible joint between the sliding pocket system and the wall.

2

PERFECT ALIGNMENT

The exclusive patented alignment bar provides a solid joint between the frame and the metal stop jamb during the installation, ensuring a perfect alignment and the smooth sliding of the door.

3

A TEAR-OFF PROFILE THAT MAKES LIFE EASIER

Installation mistakes might happen: the patented under frame tear-off profile is the smart system to fix the difference between the bottom of the pocket and the finished floor.

4

SPECIFIC DESIGN FOR MASONRY CONSTRUCTIONS

41 kg of sturdiness and technology to integrate with the wall, seamlessly.

5

SLIDING RUNNERS WITH BALL BEARINGS

They ensure durability, smooth movements and a silent sliding. Suitable for door panels up to 100 kg and up to 150 kg on request.

6

ALWAYS CENTERED

With the self-centering guide the door always slides straight, avoiding any contact with the sides of the pocket.

7

EXTRACTABLE TRACK

The serenity of knowing that you can extract the patented track at any time, to clean the door sliding guide, replace it with a new track or install accessories.

8

SPECIFIC DESIGN FOR PLASTERBOARD CONSTRUCTIONS


The new reinforced horizontal bars come with a grid array of drillholes so that screws can be fastened to the metal sheet even more easily and faster than before.



ECLISSE SINGLE - DOUBLE

TECHNICAL DETAILS - STUD WALL

INNOVATIONS FOR THE INSTALLER

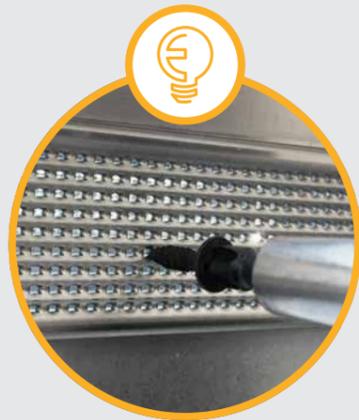

Pre-drilled horizontal bars


Quicker application of the plasterboards. In the ongoing effort to ease the construction work for the installer, ECLISSE introduced a perforated weave obtained by pre-drilling the horizontal reinforced bars. The new micro drillholes allows the screw to enter more easily into the metal sheet, speeding up the installer's work in the application of the plasterboard.

Furthermore, the optimization of the dove-tail profile and the increased width of the bar also improve its performance in terms of solidity of the structure.




Metal door post

It reinforces the structure preventing structural deformation.

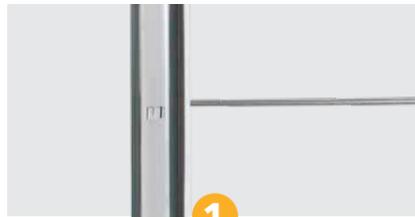


Extractable track system (Patented)

The ECLISSE system has a patented extractable track which allows you to remove the track at any time with no need of masonry work.

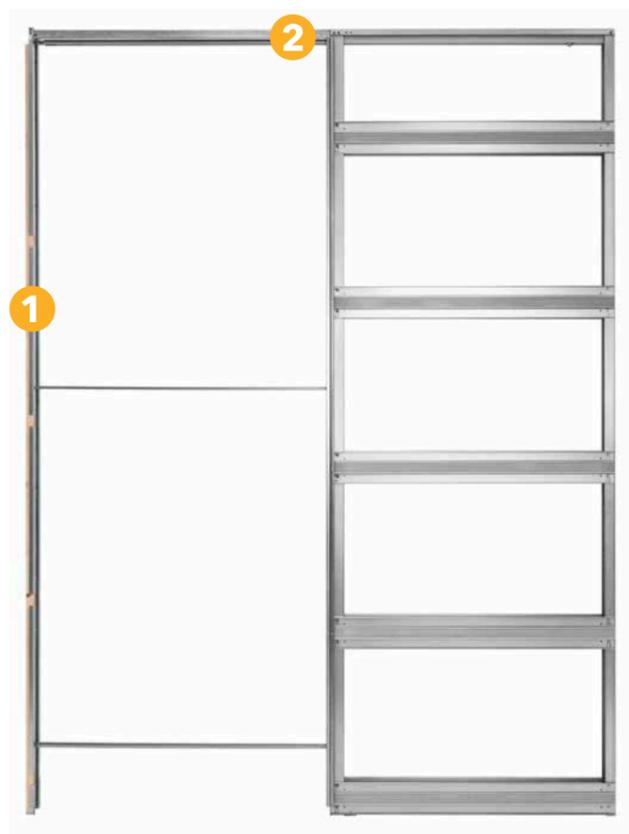

Two adjustable door stops

When you close a pocket door, you don't want the door to start sliding back in the opening position, revealing an annoying chink of light. To avoid this the ECLISSE system has specially designed small clamps that hold the door in the closing position.

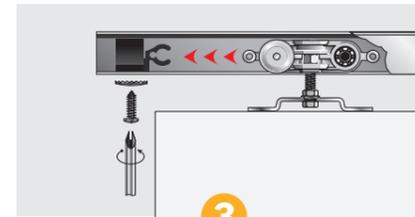


Maintenance free track and runners

Smooth and quiet sealed for life runners with chrome steel ball bearings run in an enclosed track so they cannot derail. Suitable for door panels up to 100 kg and up to 150 kg on request.



Metal track holder

Horizontal bar made of metal, rather than wood, increases the robustness of the structure against above loads.

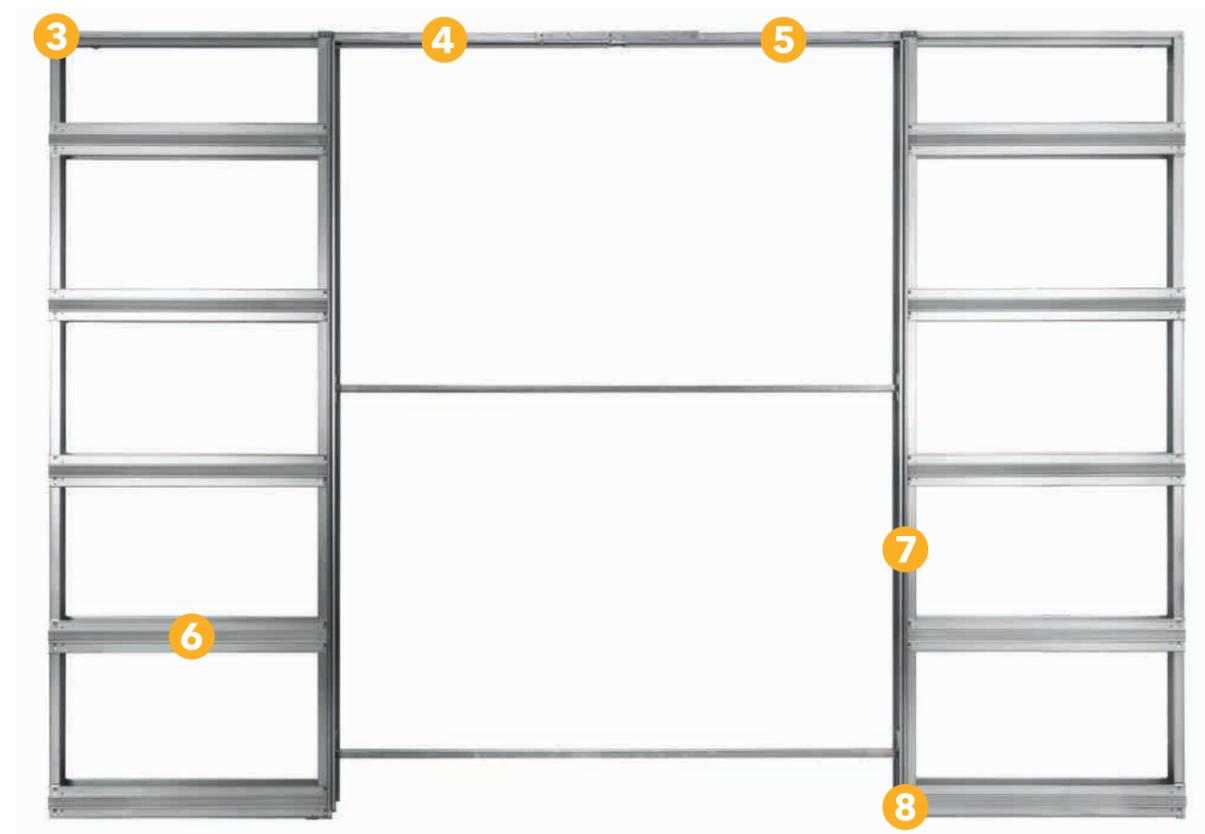

Marked pre-drilled horizontal bars

The horizontal reinforced bars, made in 7/10 pre-drilled galvanized steel, grant high resistance to lateral pressure. The mark on the pocket's verticals allows you to easily draw a line to identify the center of the horizontal bar.



Vertical reinforced bars

ECLISSE pocket central verticals are made of 1.2 mm galvanised steel, formed into strong profiles. These are the strongest of their type on the market.




Self-centering door guide

Quick and easy to fit to the pocket door with no holes to drill, this guide cleverly guarantees a perfectly centered position.

PACKAGING

170 x 2330 x 115 mm for the kit version.
Starting from 640 x 2260 x 110 mm for the assembled version.

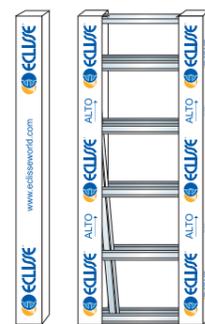

KIT ASSEMBLED

VERSATILITY

The kit is extremely compact to store, taking up no more than 1 sqm for 50 units! One kit can fit a finished wall thickness of 100 mm and 125 mm without any further parts.




ECLISSE SINGLE - DOUBLE

TECHNICAL DETAILS - SOLID WALL

Metal door post

It reinforces the structure preventing structural deformation.

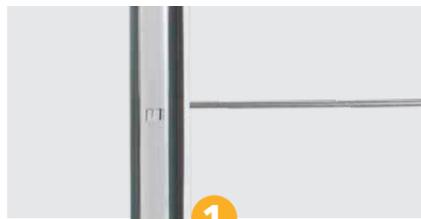


Reinforced central verticals

ECLISSE pocket central verticals are made from 1.2 mm galvanised steel, formed into strong profiles. The strongest of their type on the market.




Extractable track system (Patented)

The ECLISSE system has a patented extractable track which allows you to remove the track at any time with no need of masonry work.

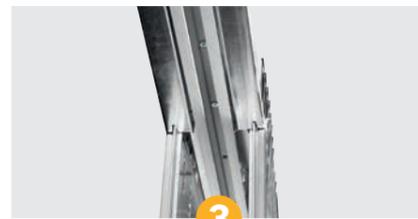

Two adjustable door stops

When you close a pocket door, you don't want the door to start sliding back in the opening position, revealing an annoying chink of light. To avoid this the ECLISSE system has specially designed small clamps that hold the door in the closing position.

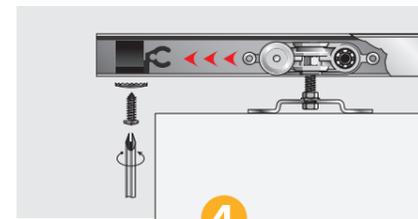


Maintenance free track and runners

Smooth and quiet sealed for life runners with chrome steel ball bearings run in an enclosed track so they cannot derail. Suitable for door panels up to 100 kg and up to 150 kg on request.



Protruding plaster mesh (50x25 mm)

It joins the pocket with the wall becoming an integral part of it, it protrudes from the frame by a few centimetres simplifying the installation and the adhesion of the cement plaster and offering a seamless and resistant finish.

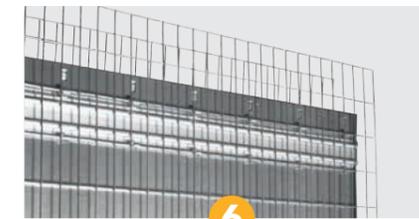


EASY TO PLASTER




Cement plastering does not fall because it is hold by the knurled thick mesh* (25 x 50 mm) placed in between the plate and the edge of the cement plastering.

*Knurl mesh: made of furrowed and engraved wire to improve cement plastering adhesion.

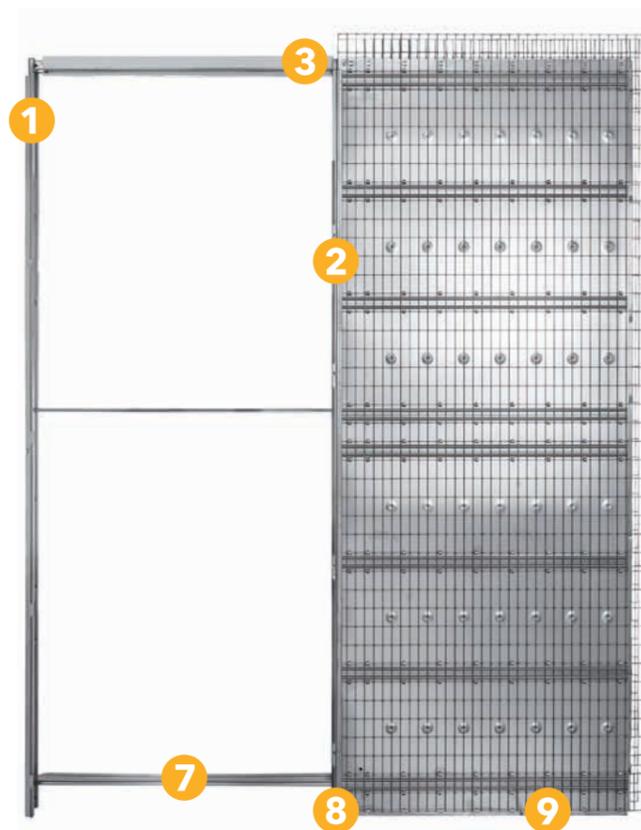

Alignment bar (Patented)

It provides a solid joint between the frame and the metal stop jamb during the installation. It guarantees a perfect square positioning.

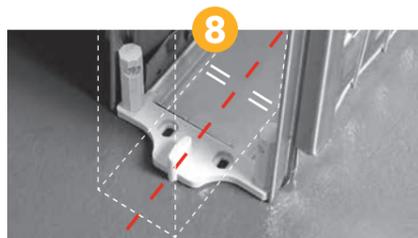


Self-centering door guide

Quick and easy to fit to the pocket door with no holes to drill, this guide cleverly guarantees a perfectly centered position.




Under frame tear-off profile (Patented)

It allows to correct the difference in height between the finished floor level and the bottom of the installed counterframe. As easy as opening a can!

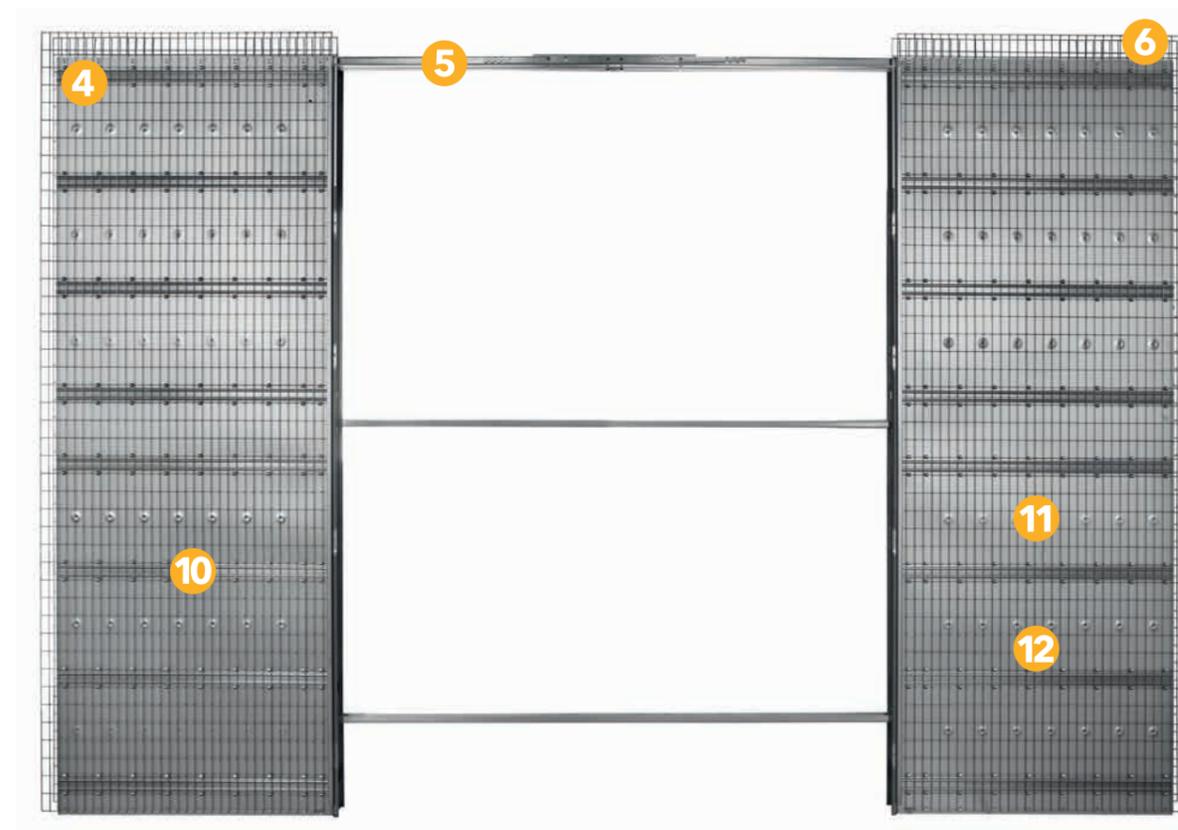

Horizontal reinforced bars

The horizontal bars lends great resistance and rigidity to the pocket, so that it can effectively counter the tension generated by brickwork and solid wall. Robustness is fundamental as the frame replaces a portion of the wall.

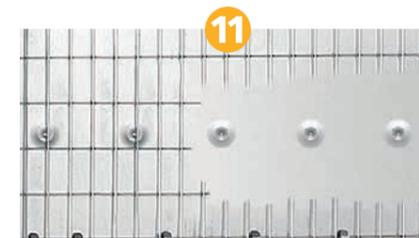

Micro-ribbed filler plate

A 0.7 mm micro-ribbed filler plate is embossed to increase rigidity and strength. The embossing is a process of punching the metal sheet in order to create reliefs.



Mesh-frame weld-free fixing system (Patented)

It avoids the formation of rust and prevent the possible detachment of the mesh from the counterframe.

ECLISSE SIZE GUIDE

CHOOSING THE RIGHT POCKET DOOR

Sizing a single pocket door system is very easy.


Step 1 - Measure the available space.

Step 2 - Choose the standard pocket door frame size that will fit the space.

Step 3 - Perhaps you need a wider passage width? Then you might consider a couple of alternative options.


Using a Classic single pocket door systems as an example.

STEP 1

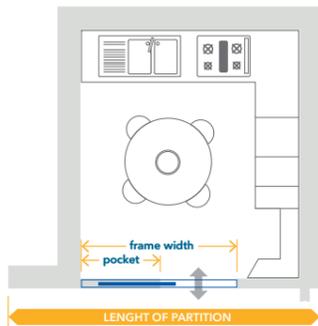


Measure the overall wall space you have available. The pocket door frame needs to fit within this space.

STEP 2

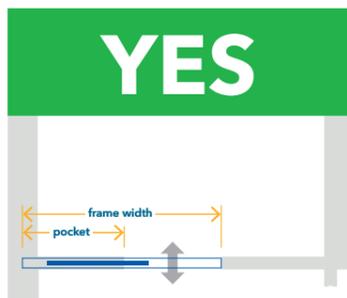


Look at the sizing table and decide which frame size will fit within the available space and which size door you can use with that frame.
 E.g.: Consider an ECLISSE SINGLE sliding pocket door system.
 Overall wall space length and height of partition = 1800x2300 mm.
 Door panel size = perhaps you would like to use the largest possible standard door panel size to provide the largest passage width possible.
 From the ECLISSE SINGLE size chart you can see that the widest frame size fitting the available space is 1697x2190 mm. This will provide a max. passage size of 800x2100 mm and will require you to buy a door 815+835x2110 mm.

STEP 3

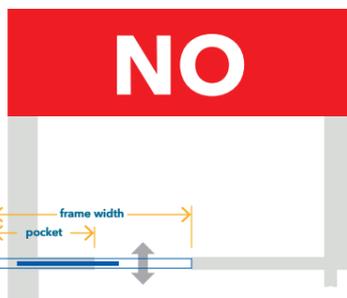

If you want a larger passage width or door size than the frame size is providing...

ALTERNATIVE SOLUTIONS

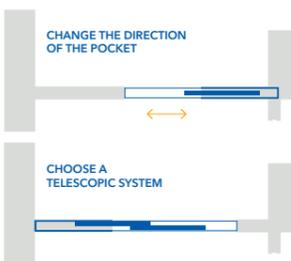

...you might for example consider on which side to have the pocket
 It may be that switching the position of the pocket with respect to door passage gives you a better solution.
 If you require a larger passage width, a single telescopic system could give you a possible solution.
 Just browse our complete product range to find the perfect solution for your needs!

ECLISSE SIZE GUIDE

STUDWORK, BRICKS AND FINISHED WALL THICKNESS



EUROPEAN WOOD/METAL STUDWORK FOR STUD WALL

Stud walls are made from wooden or steel studwork with plasterboard attached. This is important information to be considered while looking at the product size charts, as there are many sizes of studwork around the world. The steel framework replace a portion of the studwork and the doors are hung from the top track. ECLISSE pockets can be used with steel or wooden studwork. In the photo you can see what it looks like before applying the plasterboard.

STUDWORK= S	INTERNAL PASSAGE= IP
70*	54*
75	54
95*	79*
100	79

Dimensions are given in mm

Adding the plasterboard to the studwork you will reach the required finished wall thickness dimension. Here an example (considering the plasterboard is nearly always 12.5 mm thick):

- 75 mm stud work plus 12.5 mm plasterboard on each side gives a finished wall thickness of 100 mm.
- 100 mm stud work plus 12.5 mm plasterboard on each side gives a finished wall thickness of 125 mm.

*Dimensions and sizes different from the following chart.


EUROPEAN BRICK THICKNESS FOR SOLID WALL

BRICKS= Br	INTERNAL PASSAGE= IP
60	54
80	72
100	89
120	114

Dimensions are given in mm

ECLISSE SINGLE

SOLID WALL

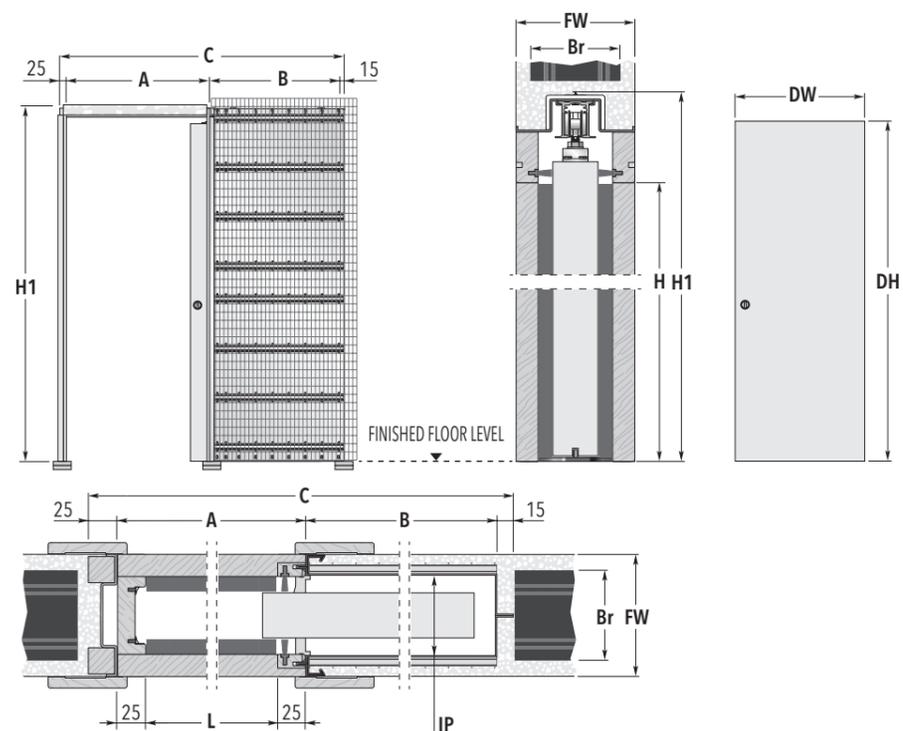

SYSTEMS FOR SINGLE DOOR - Measures related to Italian standards, other dimensions available

PASSAGE SIZE L x H	OVERALL DIMENSIONS		DOOR PANEL*		
	C x H1	A	B	DW	DH
600 x 2000/2100	1315 x 2090/2190	650	625	615 ÷ 635	2010/2110
650 x 2000/2100	1465 x 2090/2190	700	725	665 ÷ 735	2010/2110
700 x 2000/2100	1515 x 2090/2190	750	725	715 ÷ 735	2010/2110
750 x 2000/2100	1665 x 2090/2190	800	825	765 ÷ 835	2010/2110
800 x 2000/2100	1715 x 2090/2190	850	825	815 ÷ 835	2010/2110
850 x 2000/2100	1865 x 2090/2190	900	925	865 ÷ 935	2010/2110
900 x 2000/2100	1915 x 2090/2190	950	925	915 ÷ 935	2010/2110
950 x 2000/2100	2065 x 2090/2190	1000	1025	965 ÷ 1035	2010/2110
1000 x 2000/2100	2115 x 2090/2190	1050	1025	1015 ÷ 1035	2010/2110

FINISHED WALL = FW	BRICKS = Br	INTERNAL PASSAGE = IP
90 →	60	54
108 →	80	72
125 →	100	89
150 →	120	114

NON-STANDARD SIZES

- ▶ Passage width 600÷1200 mm.
- ▶ Passage height 500÷2600 mm.
- ▶ Possibility of measures up to 1500 mm (width) and 2900 mm (height) with sizes and internal passages different from the chart.
- ▶ Frames with overall dimensions, passage sizes and internal dims different from the ones indicated on the table, can be realized on request.

NOTES


- ▶ When using pocket with internal dims of 54 mm max. door thickness 40 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg (150 kg on request).
- ▶ ECLISSE counterframes can host any sliding door panel of standard dimensions available on the market.
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.

ACCESSORIES

- ▶ ECLISSE BIAS®
- ▶ ECLISSE BIAS® DS
- ▶ ECLISSE PUSH&PULL C
- ▶ Self-closing system
- ▶ Motorisation
- ▶ Anti-warp profile

ECLISSE SINGLE

STUD WALL

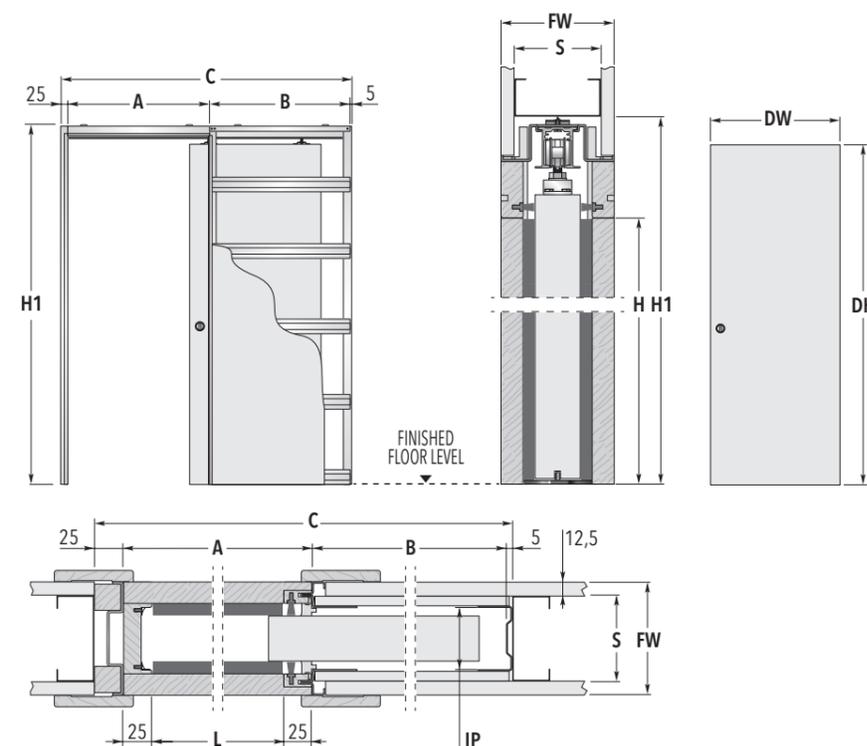

SYSTEMS FOR SINGLE DOOR - Measures related to Italian standards, other dimensions available

PASSAGE SIZE L x H	OVERALL DIMENSIONS		DOOR PANEL*		
	C x H1	A	B	DW	DH
600 x 2000/2100	1297 x 2090/2190	650	617	615 ÷ 635	2010/2110
650 x 2000/2100	1447 x 2090/2190	700	717	665 ÷ 735	2010/2110
700 x 2000/2100	1497 x 2090/2190	750	717	715 ÷ 735	2010/2110
750 x 2000/2100	1647 x 2090/2190	800	817	765 ÷ 835	2010/2110
800 x 2000/2100	1697 x 2090/2190	850	817	815 ÷ 835	2010/2110
850 x 2000/2100	1847 x 2090/2190	900	917	865 ÷ 935	2010/2110
900 x 2000/2100	1897 x 2090/2190	950	917	915 ÷ 935	2010/2110
950 x 2000/2100	2047 x 2090/2190	1000	1017	965 ÷ 1035	2010/2110
1000 x 2000/2100	2097 x 2090/2190	1050	1017	1015 ÷ 1035	2010/2110

FINISHED WALL = FW	STUDWORK = S	INTERNAL PASSAGE = IP
100 →	75	54
125 →	100	79
150 →	100	103

NON-STANDARD SIZES

- ▶ Passage width 600÷1200 mm.
- ▶ Passage height 500÷2600 mm.
- ▶ Possibility of measures up to 2000 mm (width) and 3000 mm (height) with sizes and internal passages different from the chart.
- ▶ Frames with overall dimensions, passage sizes and internal dims different from the ones indicated on the table, can be realized on request.
- ▶ On non-standard size frames, the horizontal reinforced bars are screwed.

NOTES

- ▶ When using pocket with internal dims of 54 mm max. door thickness 40 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg (150 kg on request).
- ▶ ECLISSE counterframes can host any sliding door panel of standard dimensions available on the market.
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.


ACCESSORIES

- ▶ ECLISSE BIAS®
- ▶ ECLISSE BIAS® DS
- ▶ ECLISSE PUSH&PULL C
- ▶ Self-closing system
- ▶ Motorisation
- ▶ Anti-warp profile

ECLISSE SINGLE
ECLISSE DOUBLE
ECLISSE LUCE
ECLISSE EWOLUTO®
ECLISSE TELESCOPIC
ECLISSE CIRCULAR
ECLISSE UNILATERAL
ECLISSE NOVANTA
ECLISSE HOIST
ECLISSE TWICE
ECLISSE ACOUSTIC
ECLISSE SYNTHESIS® FLUSH COLLECTION
ECLISSE 40 COLLECTION
BASEBOARDS
ECLISSE DOORS
HANDLES
ACCESSORIES and HARDWARE

ECLISSE DOUBLE

SOLID WALL

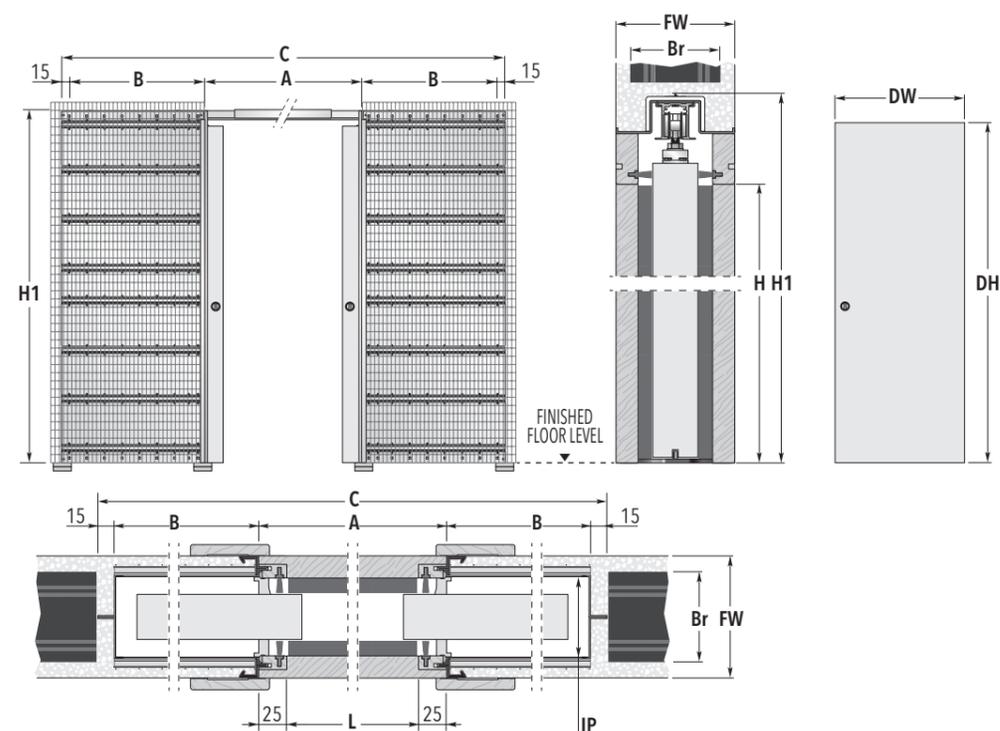

SYSTEMS FOR DOUBLE DOOR - Measures related to Italian standards, other dimensions available

PASSAGE SIZE L x H	OVERALL DIMENSIONS		DOOR PANEL*		
	C x H1	A	B	DW	DH
1200 x 2000/2100	2530 x 2090/2190	1250	625	615 ÷ 635	2010/2110
1300 x 2000/2100	2830 x 2090/2190	1350	725	665 ÷ 735	2010/2110
1400 x 2000/2100	2930 x 2090/2190	1450	725	715 ÷ 735	2010/2110
1500 x 2000/2100	3230 x 2090/2190	1550	825	765 ÷ 835	2010/2110
1600 x 2000/2100	3330 x 2090/2190	1650	825	815 ÷ 835	2010/2110
1700 x 2000/2100	3630 x 2090/2190	1750	925	865 ÷ 935	2010/2110
1800 x 2000/2100	3730 x 2090/2190	1850	925	915 ÷ 935	2010/2110
1900 x 2000/2100	4030 x 2090/2190	1950	1025	965 ÷ 1035	2010/2110
2000 x 2000/2100	4130 x 2090/2190	2050	1025	1015 ÷ 1035	2010/2110

FINISHED WALL = FW	BRICKS = Br	INTERNAL PASSAGE = IP
90 →	60	54
108 →	80	72
125 →	100	89
150 →	120	114

NON-STANDARD SIZES

- ▶ Passage width 600+600=1200+1200 mm.
- ▶ Passage height 500÷2600 mm.
- ▶ Possibility of measures up to 1500+1500 mm (width) and 2900 mm (height) with sizes and internal passages different from the chart.
- ▶ Frames with overall dimensions, passage sizes and internal dims different from the ones indicated on the table, can be realized on request.

NOTES


- ▶ When using pocket with internal dims of 54 mm max. door thickness 40 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg (150 kg on request).
- ▶ ECLISSE counterframes can host any sliding door panel of standard dimensions available on the market.
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.

ACCESSORIES

- ▶ Double door co-ordination for CLASSIC
- ▶ ECLISSE BIAS®
- ▶ ECLISSE BIAS® DS
- ▶ ECLISSE PUSH&PULL C
- ▶ Motorisation
- ▶ Anti-warp profile

ECLISSE DOUBLE

STUD WALL

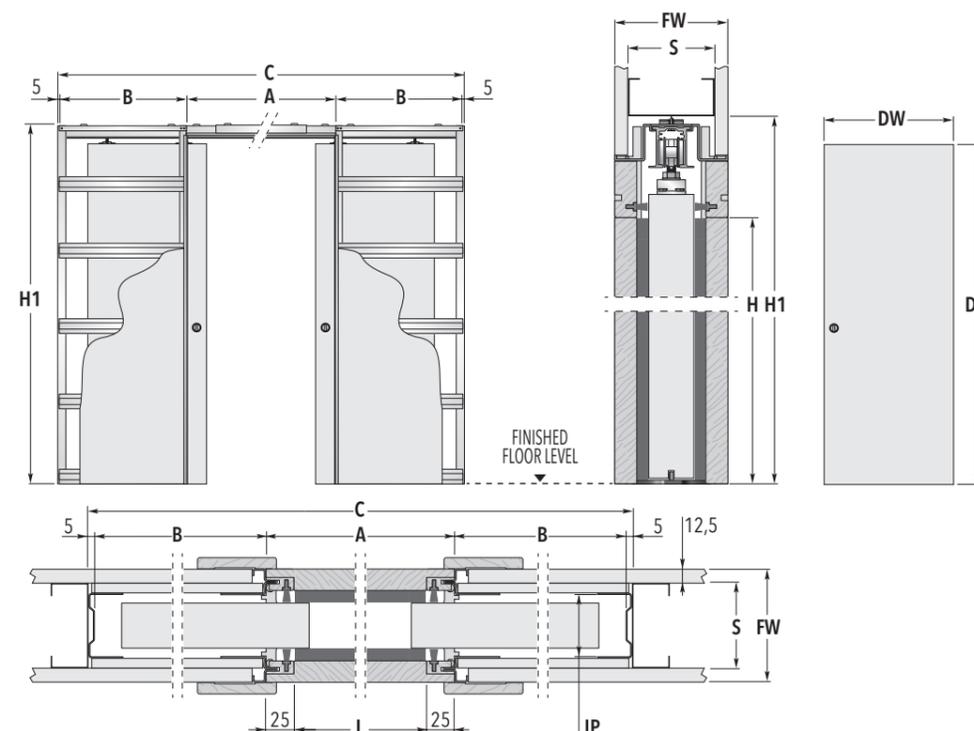

SYSTEMS FOR DOUBLE DOOR - Measures related to Italian standards, other dimensions available

PASSAGE SIZE L x H	OVERALL DIMENSIONS		DOOR PANEL*		
	C x H1	A	B	DW	DH
1200 x 2000/2100	2494 x 2090/2190	1250	617	615 ÷ 635	2010/2110
1300 x 2000/2100	2794 x 2090/2190	1350	717	665 ÷ 735	2010/2110
1400 x 2000/2100	2894 x 2090/2190	1450	717	715 ÷ 735	2010/2110
1500 x 2000/2100	3194 x 2090/2190	1550	817	765 ÷ 835	2010/2110
1600 x 2000/2100	3294 x 2090/2190	1650	817	815 ÷ 835	2010/2110
1700 x 2000/2100	3594 x 2090/2190	1750	917	865 ÷ 935	2010/2110
1800 x 2000/2100	3694 x 2090/2190	1850	917	915 ÷ 935	2010/2110
1900 x 2000/2100	3994 x 2090/2190	1950	1017	965 ÷ 1035	2010/2110
2000 x 2000/2100	4094 x 2090/2190	2050	1017	1015 ÷ 1035	2010/2110

FINISHED WALL = FW	STUDWORK = S	INTERNAL PASSAGE = IP
100 →	75	54
125 →	100	79
150 →	100	103

NON-STANDARD SIZES

- ▶ Passage width 600+600=1200+1200 mm.
- ▶ Passage height 500÷2600 mm.
- ▶ Possibility of measures up to 2000+2000 mm (width) and 3000 mm (height) with sizes and internal passages different from the chart.
- ▶ Frames with overall dimensions, passage sizes and internal dims different from the ones indicated on the table, can be realized on request.
- ▶ On non-standard size frames, the horizontal reinforced bars are screwed.

NOTES

- ▶ When using pocket with internal dims of 54 mm max. door thickness 40 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg (150 kg on request).
- ▶ ECLISSE counterframes can host any sliding door panel of standard dimensions available on the market.
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.

ACCESSORIES

- ▶ Double door co-ordination for CLASSIC
- ▶ ECLISSE BIAS®
- ▶ ECLISSE BIAS® DS
- ▶ ECLISSE PUSH&PULL C
- ▶ Motorisation
- ▶ Anti-warp profile

ECLISSE LUCE

TECHNICAL DETAILS


No limitations for light fittings, switches and electrical wires thanks to the patented ECLISSE LUCE system: the first pocket door system which allows you to install light spots, thermostats, switches and telephone wiring in the same wall section where it is hosted. With this system you will be able to make full usage of the wall, opening up a whole host of options for interior lighting plans and other functional or aesthetic design ideas. Available for single or double door.

Patented technology




ECLISSE LUCE patented technology that grants the box-frame to be arranged with any electric device.

Pre-cut steel

In the solid wall version the micro-ribbed steel filler plate is pre-cut, easy to remove in order to insert electrical boxes. It is possible to insert up to 10 electrical boxes per pocket (5 on each sides).

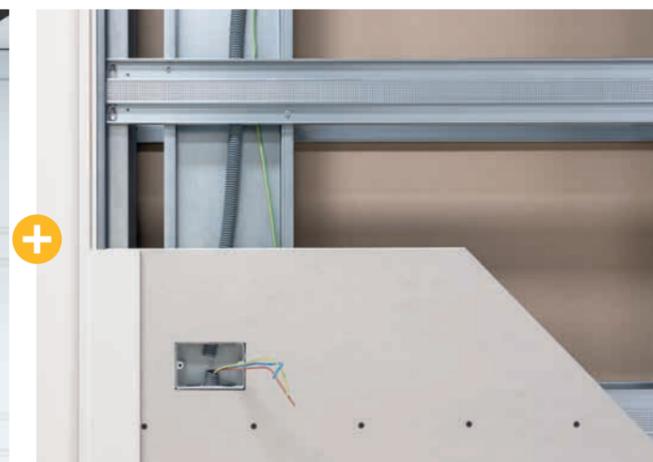

Electrical boxes
Electrical boxes supplied by ECLISSE have a reduced specific depth of 40 mm. 2 electrical boxes per pocket are provided as standard for ECLISSE LUCE SINGLE and ECLISSE LUCE DOUBLE.

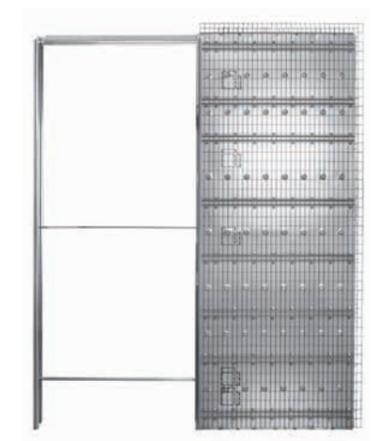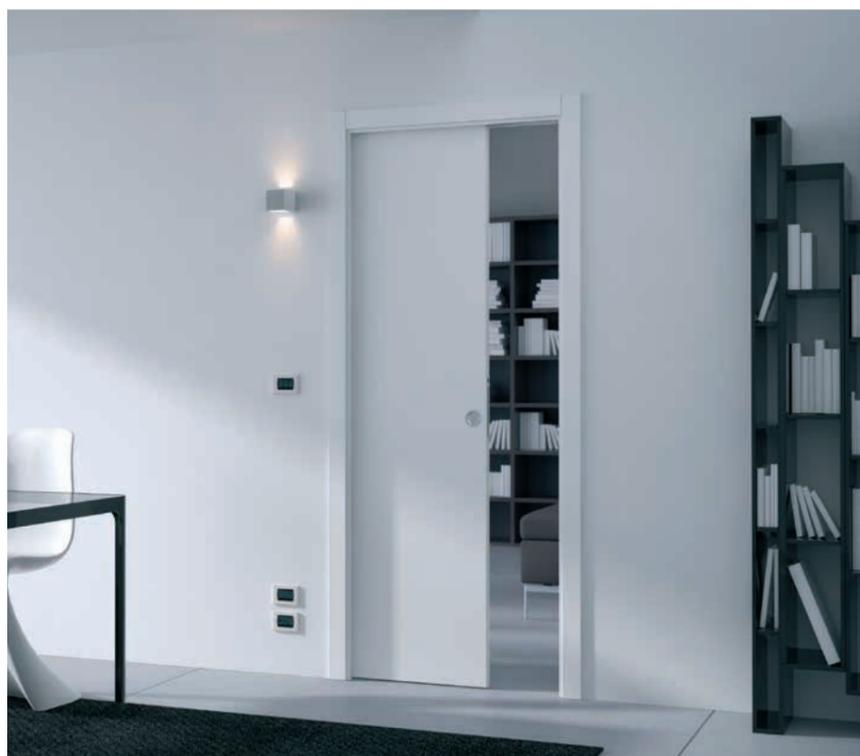

ECLISSE LUCE SINGLE
SOLID WALL

PASSAGE SIZE
L=600÷1300 mm
H=1000÷2600 mm




ECLISSE LUCE DOUBLE
STUD WALL

PASSAGE SIZE
L=600+600÷1300+1300 mm
H=1000÷2600 mm

- ECLISSE SINGLE
- ECLISSE DOUBLE
- ECLISSE LUCE
- ECLISSE EWOLUTO*
- ECLISSE TELESCOPIC
- ECLISSE CIRCULAR
- ECLISSE UNILATERAL
- ECLISSE NOVANTA
- ECLISSE HOIST
- ECLISSE TWICE
- ECLISSE ACOUSTIC
- ECLISSE SYNTHESIS* FLUSH COLLECTION
- ECLISSE 40 COLLECTION
- BASEBOARDS
- ECLISSE DOORS
- HANDLES
- ACCESSORIES and HARDWARE

ECLISSE LUCE SINGLE

SOLID WALL

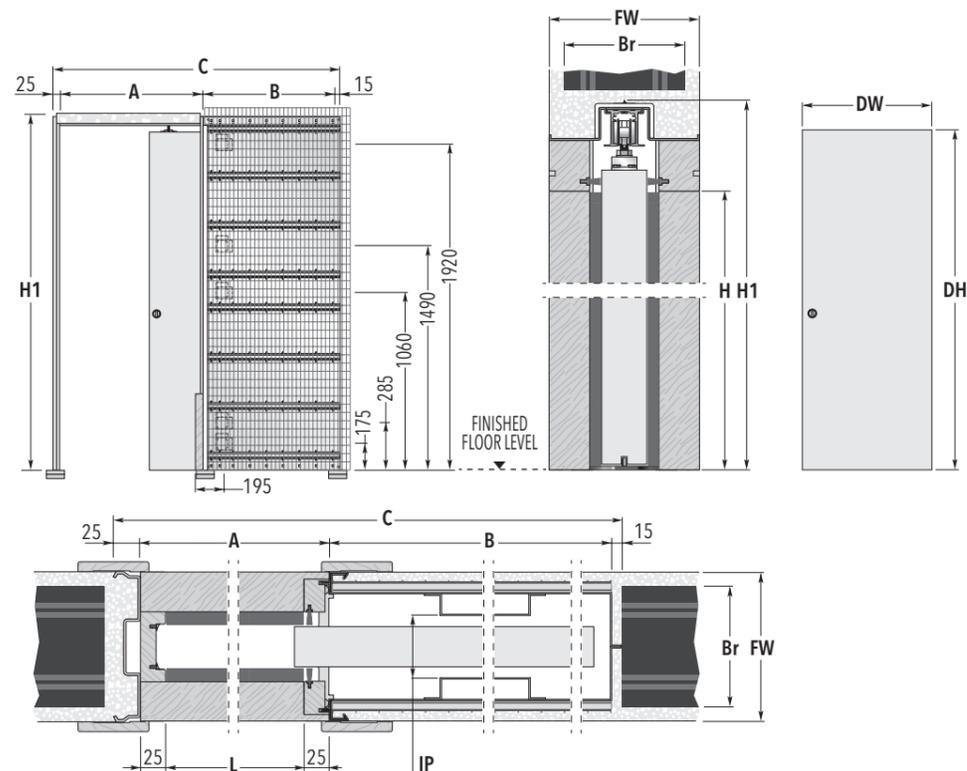

SYSTEMS FOR SINGLE DOOR - Measures related to Italian standards, other dimensions available

PASSAGE SIZE L x H	OVERALL DIMENSIONS		DOOR PANEL*		
	C x H1	A	B	DW	DH
600 x 2000/2100	1315 x 2090/2190	650	625	615 ÷ 635	2010/2110
650 x 2000/2100	1465 x 2090/2190	700	725	665 ÷ 735	2010/2110
700 x 2000/2100	1515 x 2090/2190	750	725	715 ÷ 735	2010/2110
750 x 2000/2100	1665 x 2090/2190	800	825	765 ÷ 835	2010/2110
800 x 2000/2100	1715 x 2090/2190	850	825	815 ÷ 835	2010/2110
850 x 2000/2100	1865 x 2090/2190	900	925	865 ÷ 935	2010/2110
900 x 2000/2100	1915 x 2090/2190	950	925	915 ÷ 935	2010/2110
950 x 2000/2100	2065 x 2090/2190	1000	1025	965 ÷ 1035	2010/2110
1000 x 2000/2100	2115 x 2090/2190	1050	1025	1015 ÷ 1035	2010/2110

FINISHED WALL = FW	BRICKS = Br	INTERNAL PASSAGE = IP
150	120	64

NON-STANDARD SIZES

- ▶ Passage width 600÷1300 mm.
- ▶ Passage height 1000÷2600 mm.

NOTES


- ▶ Max. door thickness 45 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg (150 kg on request).
- ▶ Max. electrical box depth 40 mm (2 boxes are supplied).
- ▶ Non-standard positions for the electrical boxes are possible (subject to the approval of our Technical Dept.).
- ▶ ECLISSE counterframes can host any sliding door panel of standard dimensions available on the market.
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.

ACCESSORIES

- ▶ ECLISSE BIAS®
- ▶ ECLISSE BIAS® DS
- ▶ ECLISSE PUSH&PULL C
- ▶ Self-closing system
- ▶ Motorisation
- ▶ Anti-warp profile

ECLISSE LUCE SINGLE

STUD WALL

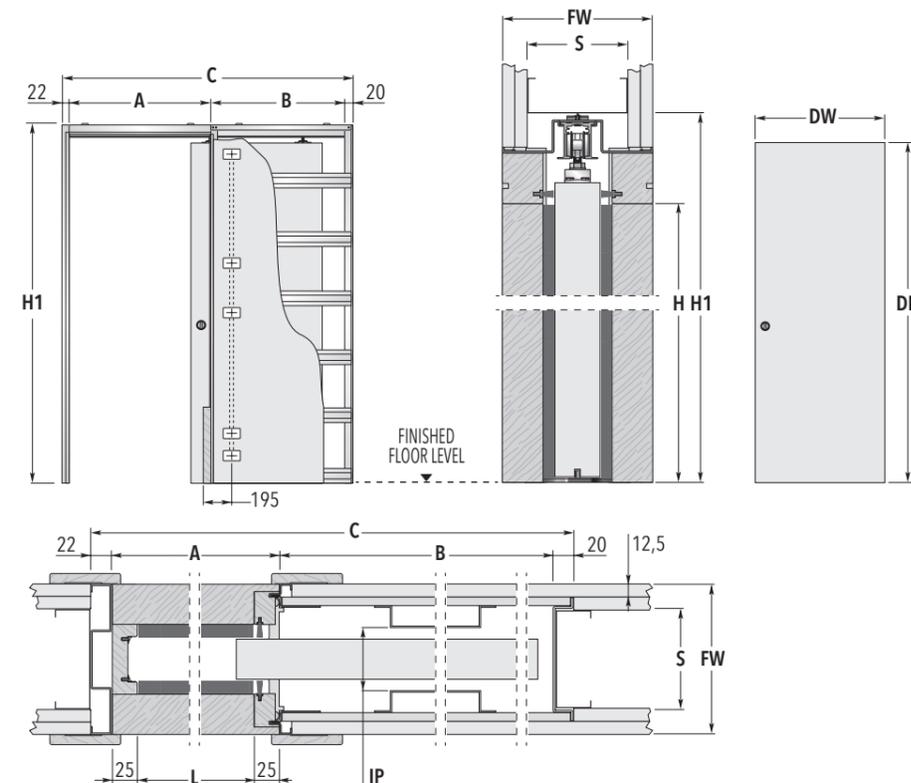

SYSTEMS FOR SINGLE DOOR - Measures related to Italian standards, other dimensions available

PASSAGE SIZE L x H	OVERALL DIMENSIONS		DOOR PANEL*		
	C x H1	A	B	DW	DH
600 x 2000/2100	1307 x 2090/2190	650	615	615 ÷ 635	2010/2110
650 x 2000/2100	1457 x 2090/2190	700	715	665 ÷ 735	2010/2110
700 x 2000/2100	1507 x 2090/2190	750	715	715 ÷ 735	2010/2110
750 x 2000/2100	1657 x 2090/2190	800	815	765 ÷ 835	2010/2110
800 x 2000/2100	1707 x 2090/2190	850	815	815 ÷ 835	2010/2110
850 x 2000/2100	1857 x 2090/2190	900	915	865 ÷ 935	2010/2110
900 x 2000/2100	1907 x 2090/2190	950	915	915 ÷ 935	2010/2110
950 x 2000/2100	2057 x 2090/2190	1000	1015	965 ÷ 1035	2010/2110
1000 x 2000/2100	2107 x 2090/2190	1050	1015	1015 ÷ 1035	2010/2110

FINISHED WALL = FW	STUDWORK = S	INTERNAL PASSAGE = IP
150	100 one plasterboard layer, two on the studwork	62

NON-STANDARD SIZES

- ▶ Passage width 600÷1300 mm.
- ▶ Passage height 1000÷2600 mm.

NOTES

- ▶ Max. door thickness 45 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg (150 kg on request).
- ▶ Max. electrical box depth 40 mm (2 boxes are supplied).
- ▶ Non-standard positions for the electrical boxes are possible (subject to the approval of our Technical Dept.).
- ▶ ECLISSE counterframes can host any sliding door panel of standard dimensions available on the market.
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.


ACCESSORIES

- ▶ ECLISSE BIAS®
- ▶ ECLISSE BIAS® DS
- ▶ ECLISSE PUSH&PULL C
- ▶ Self-closing system
- ▶ Motorisation
- ▶ Anti-warp profile

ECLISSE SINGLE
ECLISSE DOUBLE
ECLISSE LUCE
ECLISSE EWOLUTO®
ECLISSE TELESCOPIC
ECLISSE CIRCULAR
ECLISSE UNILATERAL
ECLISSE NOVANTA
ECLISSE HOIST
ECLISSE TWICE
ECLISSE ACOUSTIC
ECLISSE FLUSH COLLECTION
ECLISSE 40 COLLECTION
BASEBOARDS
ECLISSE DOORS
HANDLES
ACCESSORIES and HARDWARE

ECLISSE LUCE DOUBLE

SOLID WALL

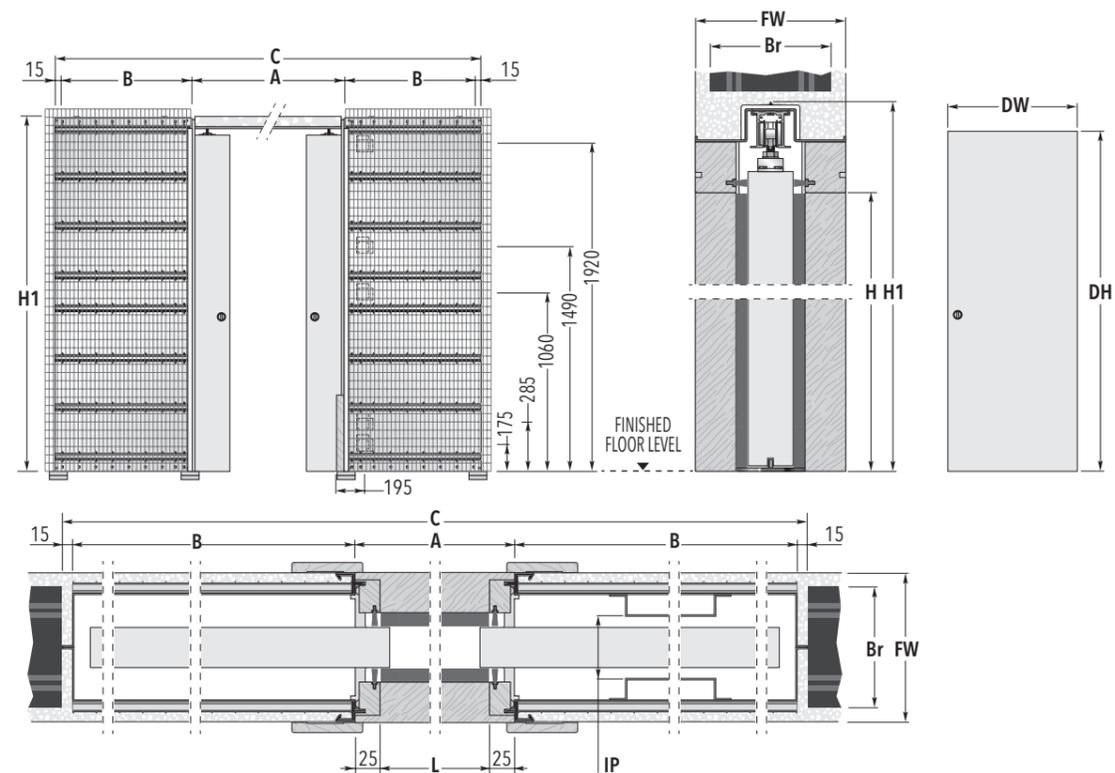

SYSTEMS FOR DOUBLE DOOR - Measures related to Italian standards, other dimensions available

PASSAGE SIZE L x H	OVERALL DIMENSIONS		DOOR PANEL*		
	C x H1	A	B	DW	DH
1200 x 2000/2100	2530 x 2090/2190	1250	625	615 ÷ 635	2010/2110
1300 x 2000/2100	2830 x 2090/2190	1350	725	665 ÷ 735	2010/2110
1400 x 2000/2100	2930 x 2090/2190	1450	725	715 ÷ 735	2010/2110
1500 x 2000/2100	3230 x 2090/2190	1550	825	765 ÷ 835	2010/2110
1600 x 2000/2100	3330 x 2090/2190	1650	825	815 ÷ 835	2010/2110
1700 x 2000/2100	3630 x 2090/2190	1750	925	865 ÷ 935	2010/2110
1800 x 2000/2100	3730 x 2090/2190	1850	925	915 ÷ 935	2010/2110
1900 x 2000/2100	4030 x 2090/2190	1950	1025	965 ÷ 1035	2010/2110
2000 x 2000/2100	4130 x 2090/2190	2050	1025	1015 ÷ 1035	2010/2110

FINISHED WALL = FW	BRICKS = Br	INTERNAL PASSAGE = IP
150	120	64

NON-STANDARD SIZES

- ▶ Passage width 600+600+1300+1300 mm.
- ▶ Passage height 1000+2600 mm.

NOTES


- ▶ Max. door thickness 45 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg (150 kg on request).
- ▶ Max. electrical box depth 40 mm (2 boxes are supplied if wiring-ready on one pocket; 4 boxes if wiring-ready on both pockets).
- ▶ Non-standard positions for the electrical boxes are possible (subject to the approval of our Technical Dept.).
- ▶ ECLISSE counterframes can host any sliding door panel of standard dimensions available on the market.
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.

ACCESSORIES

- ▶ Double door co-ordination for CLASSIC
- ▶ ECLISSE BIAS®
- ▶ ECLISSE BIAS® DS
- ▶ ECLISSE PUSH&PULL C
- ▶ Motorisation
- ▶ Anti-warp profile

ECLISSE LUCE DOUBLE

STUD WALL

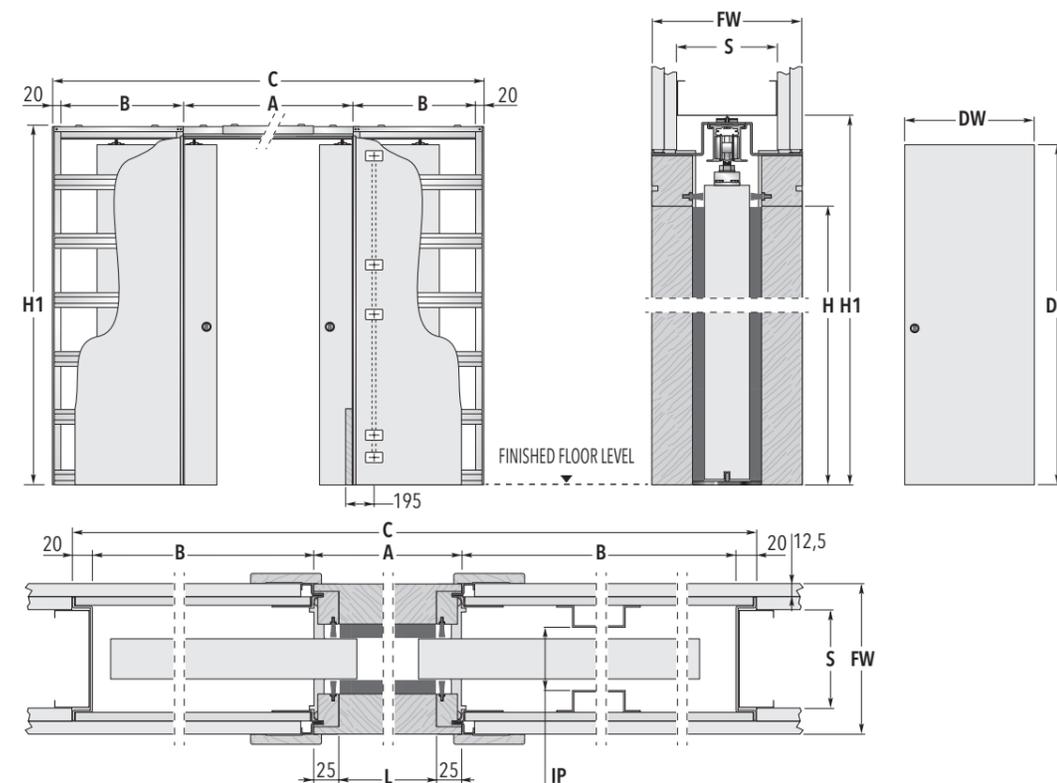

SYSTEMS FOR DOUBLE DOOR - Measures related to Italian standards, other dimensions available

PASSAGE SIZE L x H	OVERALL DIMENSIONS		DOOR PANEL*		
	C x H1	A	B	DW	DH
1200 x 2000/2100	2520 x 2090/2190	1250	615	615 ÷ 635	2010/2110
1300 x 2000/2100	2820 x 2090/2190	1350	715	665 ÷ 735	2010/2110
1400 x 2000/2100	2920 x 2090/2190	1450	715	715 ÷ 735	2010/2110
1500 x 2000/2100	3220 x 2090/2190	1550	815	765 ÷ 835	2010/2110
1600 x 2000/2100	3320 x 2090/2190	1650	815	815 ÷ 835	2010/2110
1700 x 2000/2100	3620 x 2090/2190	1750	915	865 ÷ 935	2010/2110
1800 x 2000/2100	3720 x 2090/2190	1850	915	915 ÷ 935	2010/2110
1900 x 2000/2100	4020 x 2090/2190	1950	1015	965 ÷ 1035	2010/2110
2000 x 2000/2100	4120 x 2090/2190	2050	1015	1015 ÷ 1035	2010/2110

FINISHED WALL = FW	STUDWORK = S	INTERNAL PASSAGE = IP
150	100 one plasterboard layer, two on the studwork	62

NON-STANDARD SIZES

- ▶ Passage width 600+600+1300+1300 mm.
- ▶ Passage height 1000+2600 mm.

NOTES


- ▶ Max. door thickness 45 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg (150 kg on request).
- ▶ Max. electrical box depth 40 mm (2 boxes are supplied if wiring-ready on one pocket; 4 boxes if wiring-ready on both pockets).
- ▶ Non-standard positions for the electrical boxes are possible (subject to the approval of our Technical Dept.).
- ▶ ECLISSE counterframes can host any sliding door panel of standard dimensions available on the market.
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.

ACCESSORIES

- ▶ Double door co-ordination for CLASSIC
- ▶ ECLISSE BIAS®
- ▶ ECLISSE BIAS® DS
- ▶ ECLISSE PUSH&PULL C
- ▶ Motorisation
- ▶ Anti-warp profile

ECLISSE LUCE DOUBLE

SOLID WALL

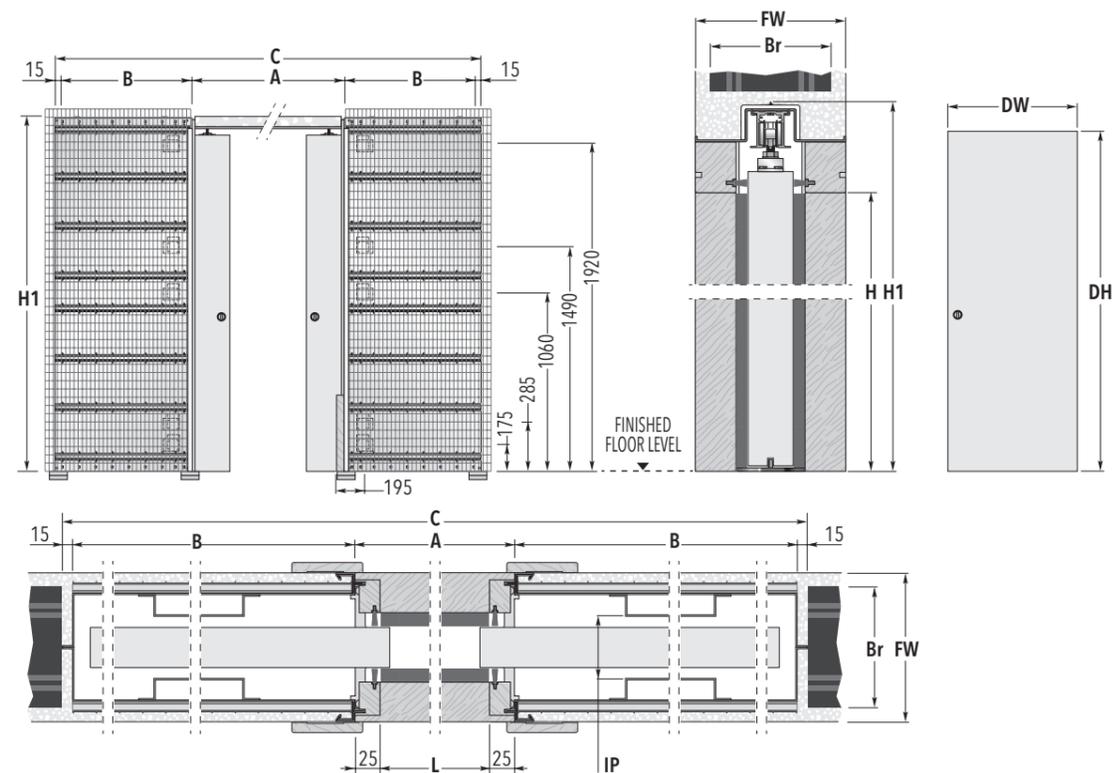

SYSTEMS FOR DOUBLE DOOR - Measures related to Italian standards, other dimensions available

PASSAGE SIZE L x H	OVERALL DIMENSIONS		DOOR PANEL*		
	C x H1	A	B	DW	DH
1200 x 2000/2100	2530 x 2090/2190	1250	625	615 ÷ 635	2010/2110
1300 x 2000/2100	2830 x 2090/2190	1350	725	665 ÷ 735	2010/2110
1400 x 2000/2100	2930 x 2090/2190	1450	725	715 ÷ 735	2010/2110
1500 x 2000/2100	3230 x 2090/2190	1550	825	765 ÷ 835	2010/2110
1600 x 2000/2100	3330 x 2090/2190	1650	825	815 ÷ 835	2010/2110
1700 x 2000/2100	3630 x 2090/2190	1750	925	865 ÷ 935	2010/2110
1800 x 2000/2100	3730 x 2090/2190	1850	925	915 ÷ 935	2010/2110
1900 x 2000/2100	4030 x 2090/2190	1950	1025	965 ÷ 1035	2010/2110
2000 x 2000/2100	4130 x 2090/2190	2050	1025	1015 ÷ 1035	2010/2110

FINISHED WALL = FW	BRICKS = Br	INTERNAL PASSAGE = IP
150	120	64

NON-STANDARD SIZES

- ▶ Passage width 600+600÷1300+1300 mm.
- ▶ Passage height 1000÷2600 mm.

NOTES


- ▶ Max. door thickness 45 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg (150 kg on request).
- ▶ Max. electrical box depth 40 mm (2 boxes are supplied if wiring-ready on one pocket; 4 boxes if wiring-ready on both pockets).
- ▶ Non-standard positions for the electrical boxes are possible (subject to the approval of our Technical Dept.).
- ▶ ECLISSE counterframes can host any sliding door panel of standard dimensions available on the market.
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.

ACCESSORIES

- ▶ Double door co-ordination for CLASSIC
- ▶ ECLISSE BIAS®
- ▶ ECLISSE BIAS® DS
- ▶ ECLISSE PUSH&PULL C
- ▶ Motorisation
- ▶ Anti-warp profile

ECLISSE LUCE DOUBLE

STUD WALL

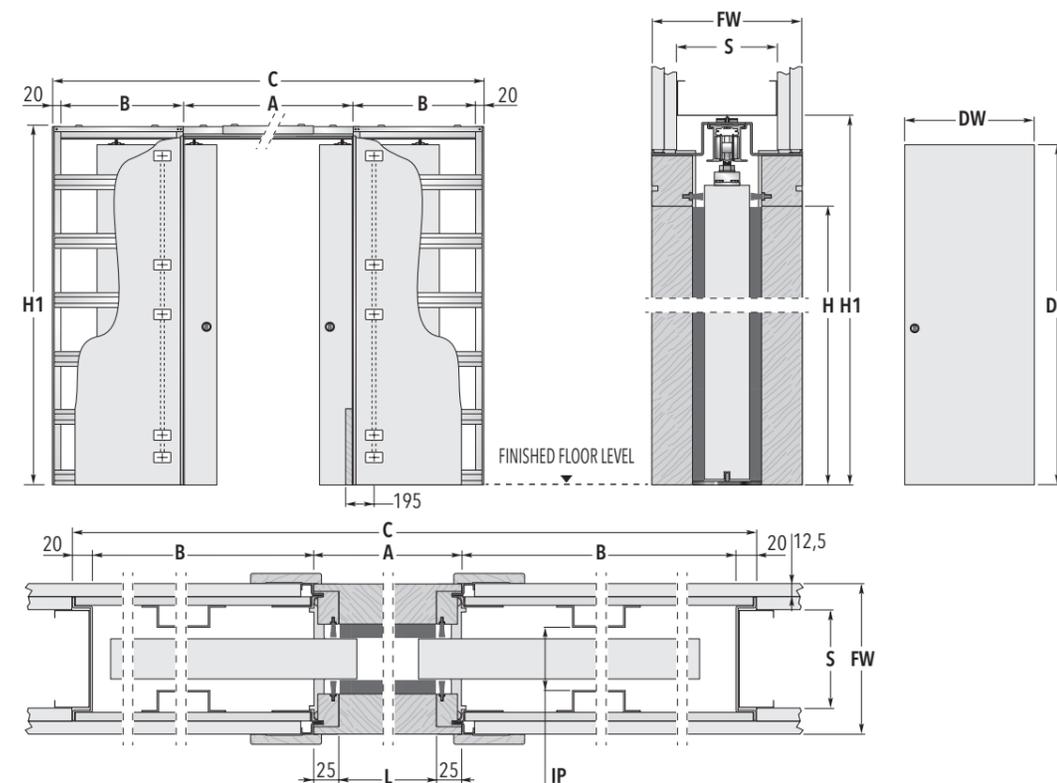

SYSTEMS FOR DOUBLE DOOR - Measures related to Italian standards, other dimensions available

PASSAGE SIZE L x H	OVERALL DIMENSIONS		DOOR PANEL*		
	C x H1	A	B	DW	DH
1200 x 2000/2100	2520 x 2090/2190	1250	615	615 ÷ 635	2010/2110
1300 x 2000/2100	2820 x 2090/2190	1350	715	665 ÷ 735	2010/2110
1400 x 2000/2100	2920 x 2090/2190	1450	715	715 ÷ 735	2010/2110
1500 x 2000/2100	3220 x 2090/2190	1550	815	765 ÷ 835	2010/2110
1600 x 2000/2100	3320 x 2090/2190	1650	815	815 ÷ 835	2010/2110
1700 x 2000/2100	3620 x 2090/2190	1750	915	865 ÷ 935	2010/2110
1800 x 2000/2100	3720 x 2090/2190	1850	915	915 ÷ 935	2010/2110
1900 x 2000/2100	4020 x 2090/2190	1950	1015	965 ÷ 1035	2010/2110
2000 x 2000/2100	4120 x 2090/2190	2050	1015	1015 ÷ 1035	2010/2110

FINISHED WALL = FW	STUDWORK = S	INTERNAL PASSAGE = IP
150	100 one plasterboard layer, two on the studwork	62

NON-STANDARD SIZES

- ▶ Passage width 600+600÷1300+1300 mm.
- ▶ Passage height 1000÷2600 mm.

NOTES

- ▶ Max. door thickness 45 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg (150 kg on request).
- ▶ Max. electrical box depth 40 mm (2 boxes are supplied if wiring-ready on one pocket; 4 boxes if wiring-ready on both pockets).
- ▶ Non-standard positions for the electrical boxes are possible (subject to the approval of our Technical Dept.).
- ▶ ECLISSE counterframes can host any sliding door panel of standard dimensions available on the market.
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.


ACCESSORIES

- ▶ Double door co-ordination for CLASSIC
- ▶ ECLISSE BIAS®
- ▶ ECLISSE BIAS® DS
- ▶ ECLISSE PUSH&PULL C
- ▶ Motorisation
- ▶ Anti-warp profile


ECLISSE EWOLUTO®

TECHNICAL DETAILS

A pocket-frame that reproduces the wall perfectly. ECLISSE EWOLUTO® (patented) is the only system that allows to use the wall accomodating the pocket door to install cabinets, wardrobes and other heavy furniture in complete safety. Available for single or double door, only for solid wall version.

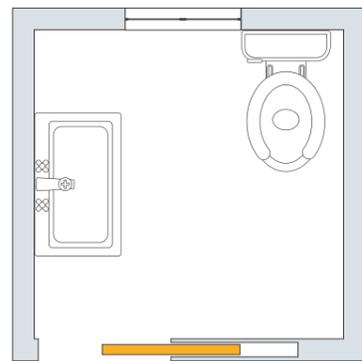

When you have little space also a sliding pocket door, despite being a space-saving solutions itself, can be a limiting factor if it's impossible to use the wall where its frame is inserted...

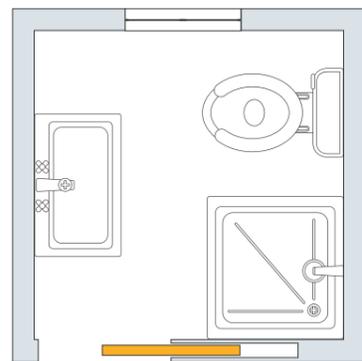

...but ECLISSE EWOLUTO® system allows to hang wall cupboards, shelves, consoles and shower boxes directly on the portion of wall within which the door slides.





TWO POINTS ANCHORAGE

CHEMICAL / MECHANICAL




FOUR POINTS ANCHORAGE

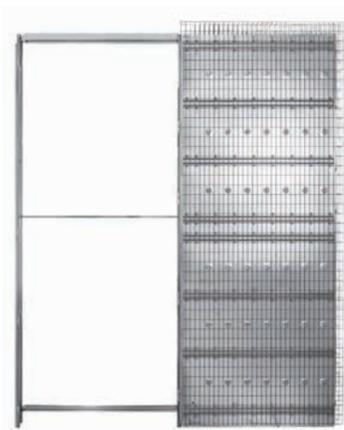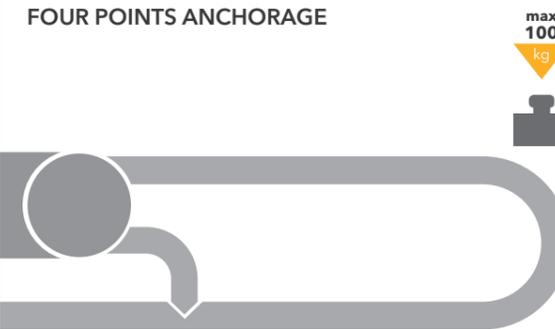

ECLISSE EWOLUTO® SINGLE
SOLID WALL

PASSAGE SIZE
L=600÷1200 mm
H=1000÷2400 mm

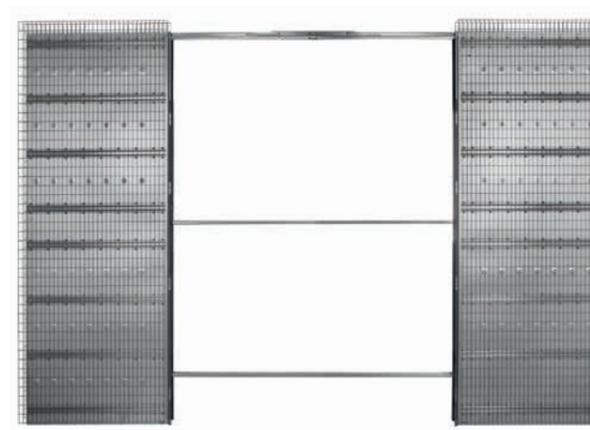

ECLISSE EWOLUTO® DOUBLE
SOLID WALL

PASSAGE SIZE
L=600+600÷1200+1200 mm
H=1000÷2400 mm


ECLISSE tested its EWOLUTO® system with the CSI testing laboratory in order to assess the load capacity of the system's vertical surfaces. We volunteered these tests to be sure to offer a product with surfaces where you can hang loads in complete safety. A shelf capacity (two-points anchorage) varies according to the type of anchor system and to the distance between the wall and the hanging extremity. Using traditional mechanical wall anchors a capacity of 30 kg (at 600 mm from the wall) to 180 kg (against the wall) is guaranteed. A chemical wall anchorage has a better capacity: from 60 kg (at 600 mm from the wall) to 360 kg (against the wall). The maximum capacity of a handle bar, fixed with a four-points chemical anchorage, is of 100 kg at a distance of 600 mm from the wall.

Values in figures are approximate. The technical staff can modify capacity values in response to the needs and type of installation. ECLISSE only gives useful advices about anchoring. For special or particular applications, different from the ones described above, please contact the technical staff.

- ECLISSE SINGLE
- ECLISSE DOUBLE
- ECLISSE LUCE
- ECLISSE EWOLUTO®
- ECLISSE TELESCOPIC
- ECLISSE CIRCULAR
- ECLISSE UNILATERAL
- ECLISSE NOVANTA
- ECLISSE HOIST
- ECLISSE TWICE
- ECLISSE ACOUSTIC
- ECLISSE FLUSH COLLECTION
- ECLISSE SYNTESIS® COLLECTION
- ECLISSE 40 COLLECTION
- BASEBOARDS
- ECLISSE DOORS
- HANDLES
- ACCESSORIES and HARDWARE

ECLISSE EWOLUTO® SINGLE

SOLID WALL

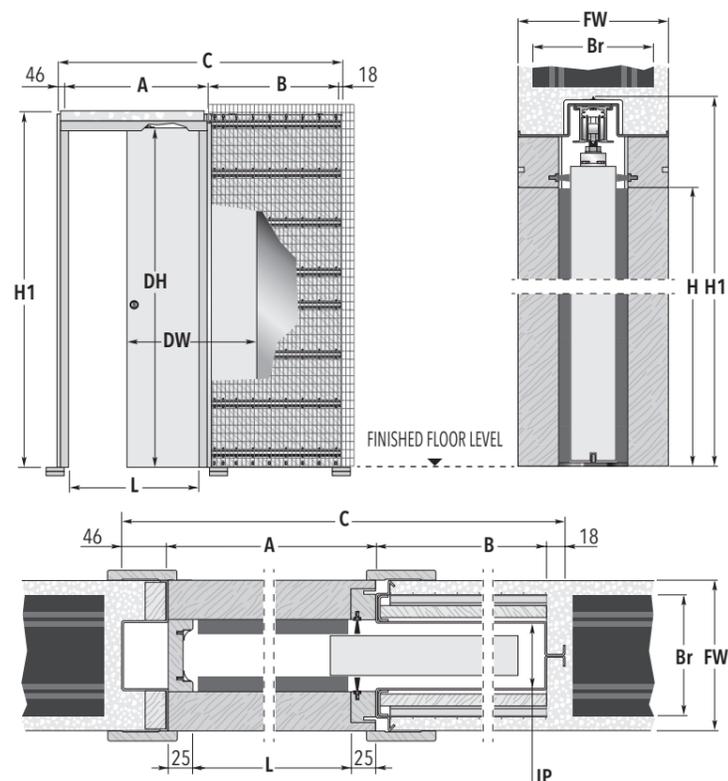

SYSTEMS FOR SINGLE DOOR - Measures related to Italian standards, other dimensions available

PASSAGE SIZE L x H	OVERALL DIMENSIONS			DOOR PANEL*	
	C x H1	A	B	DW	DH
600 x 2000/2100	1376 x 2105/2205	650	662	615 ÷ 635	2010/2110
700 x 2000/2100	1576 x 2105/2205	750	762	715 ÷ 735	2010/2110
800 x 2000/2100	1776 x 2105/2205	850	862	815 ÷ 835	2010/2110
900 x 2000/2100	1976 x 2105/2205	950	962	915 ÷ 935	2010/2110
1000 x 2000/2100	2176 x 2105/2205	1050	1062	1015 ÷ 1035	2010/2110

FINISHED WALL = FW	BRICKS = Br	INTERNAL PASSAGE = IP
150 →	120	63

INFO

A shelf capacity (two-points anchorage) varies according to the type of anchor system and to the distance between the wall and the hanging extremity. Using traditional mechanical wall anchors a capacity of 30 kg (at 600 mm from the wall) to 180 kg (against the wall) is guaranteed. A chemical wall anchorage has a better capacity: from 60 kg (at 600 mm from the wall) to 360 kg (against the wall). The maximum capacity of a handle bar, fixed with a four-points chemical anchorage, is of 100 kg at a distance of 600 mm from the wall.

Values in figures are approximate. The technical staff can modify capacity values in response to the needs and type of installation. ECLISSE only gives useful advices about anchoring. For special or particular applications, different from the ones described above, please contact the technical staff.

NON-STANDARD SIZES

- ▶ Passage width 600+1200 mm.
- ▶ Passage height 1000+2400 mm.

NOTES


- ▶ Max. door thickness 45 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg (150 kg on request).
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.

ACCESSORIES

- ▶ ECLISSE BIAS®
- ▶ ECLISSE BIAS® DS
- ▶ ECLISSE PUSH&PULL C
- ▶ Self-closing system
- ▶ Motorisation
- ▶ Anti-warp profile

ECLISSE EWOLUTO® DOUBLE

SOLID WALL

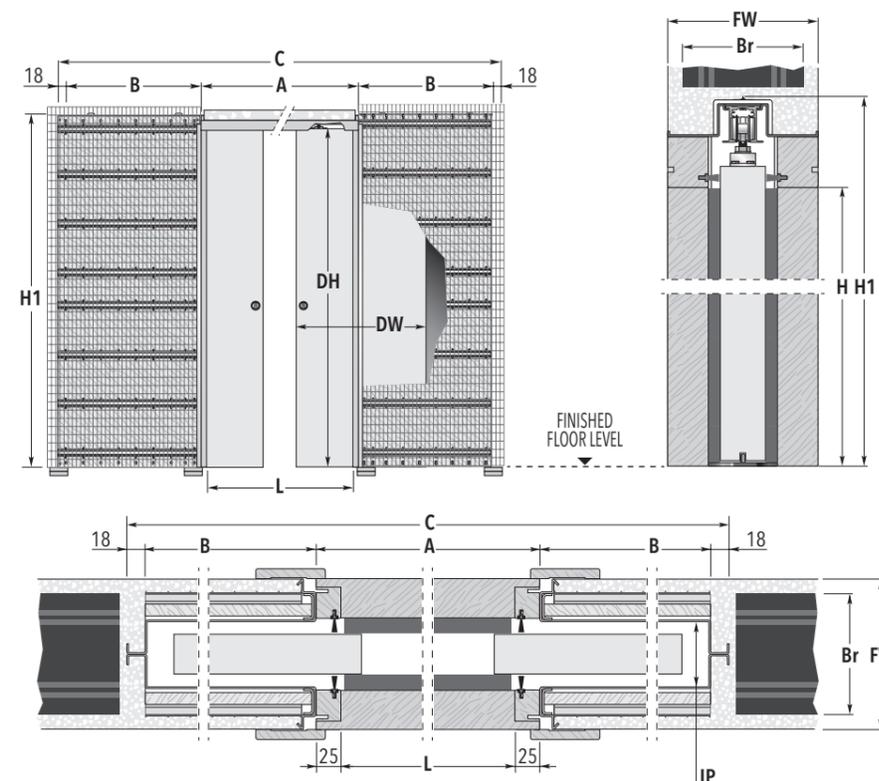

SYSTEMS FOR DOUBLE DOOR - Measures related to Italian standards, other dimensions available

PASSAGE SIZE L x H	OVERALL DIMENSIONS			DOOR PANEL*	
	C x H1	A	B	DW	DH
1200 x 2000/2100	2610 x 2105/2205	1250	662	615 ÷ 635	2010/2110
1400 x 2000/2100	3010 x 2105/2205	1450	762	715 ÷ 735	2010/2110
1600 x 2000/2100	3410 x 2105/2205	1650	862	815 ÷ 835	2010/2110
1800 x 2000/2100	3810 x 2105/2205	1850	962	915 ÷ 935	2010/2110
2000 x 2000/2100	4210 x 2105/2205	2050	1062	1015 ÷ 1035	2010/2110

FINISHED WALL = FW	BRICKS = Br	INTERNAL PASSAGE = IP
150 →	120	63

INFO

A shelf capacity (two-points anchorage) varies according to the type of anchor system and to the distance between the wall and the hanging extremity. Using traditional mechanical wall anchors a capacity of 30 kg (at 600 mm from the wall) to 180 kg (against the wall) is guaranteed. A chemical wall anchorage has a better capacity: from 60 kg (at 600 mm from the wall) to 360 kg (against the wall). The maximum capacity of a handle bar, fixed with a four-points chemical anchorage, is of 100 kg at a distance of 600 mm from the wall.

Values in figures are approximate. The technical staff can modify capacity values in response to the needs and type of installation. ECLISSE only gives useful advices about anchoring. For special or particular applications, different from the ones described above, please contact the technical staff.

NON-STANDARD SIZES

- ▶ Passage width 600+600+1200+1200 mm.
- ▶ Passage height 1000+2400 mm.

NOTES

- ▶ Max. door thickness 45 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg (150 kg on request).
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.

ACCESSORIES

- ▶ Double door co-ordination for CLASSIC
- ▶ ECLISSE BIAS®
- ▶ ECLISSE BIAS® DS
- ▶ ECLISSE PUSH&PULL C
- ▶ Motorisation
- ▶ Anti-warp profile

ECLISSE TELESCOPIC


TECHNICAL DETAILS

Two parallel door panels sliding into the same pocket, a wide passage width and a minimum encumbrance.
 An extraordinary solution that offers a passage width twice the footprint of the counterframe. Up to 4 telescopic parallel sliding door panels can cover a passage size width up to 4700 mm.
 Contemporary design conceives more and more open spaces.



ECLISSE TELESCOPIC SINGLE
SOLID WALL

PASSAGE SIZE
L=1140÷2340 mm
H=1000÷2600 mm

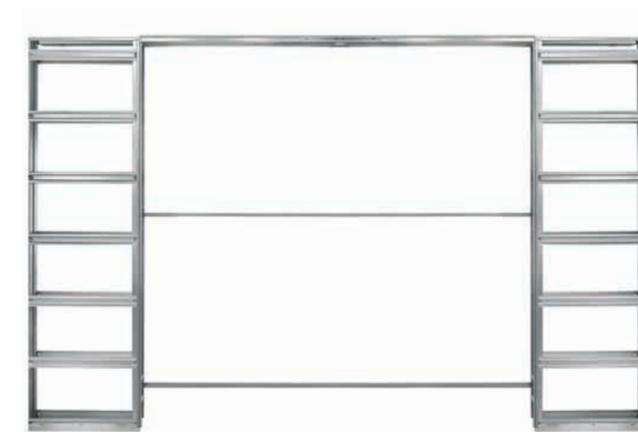


ECLISSE TELESCOPIC DOUBLE
STUD WALL

PASSAGE SIZE
L=2300÷4700 mm
H=1000÷2600 mm

- ECLISSE SINGLE
- ECLISSE DOUBLE
- ECLISSE LUCE
- ECLISSE EWOLUTO*
- ECLISSE TELESCOPIC**
- ECLISSE CIRCULAR
- ECLISSE UNILATERAL
- ECLISSE NOVANTA
- ECLISSE HOIST
- ECLISSE TWICE
- ECLISSE ACOUSTIC
- ECLISSE SYNTESIS* FLUSH COLLECTION
- ECLISSE 40 COLLECTION
- BASEBOARDS
- DOORS
- HANDLES
- ACCESSORIES and HARDWARE

ECLISSE TELESCOPIC SINGLE

SOLID WALL

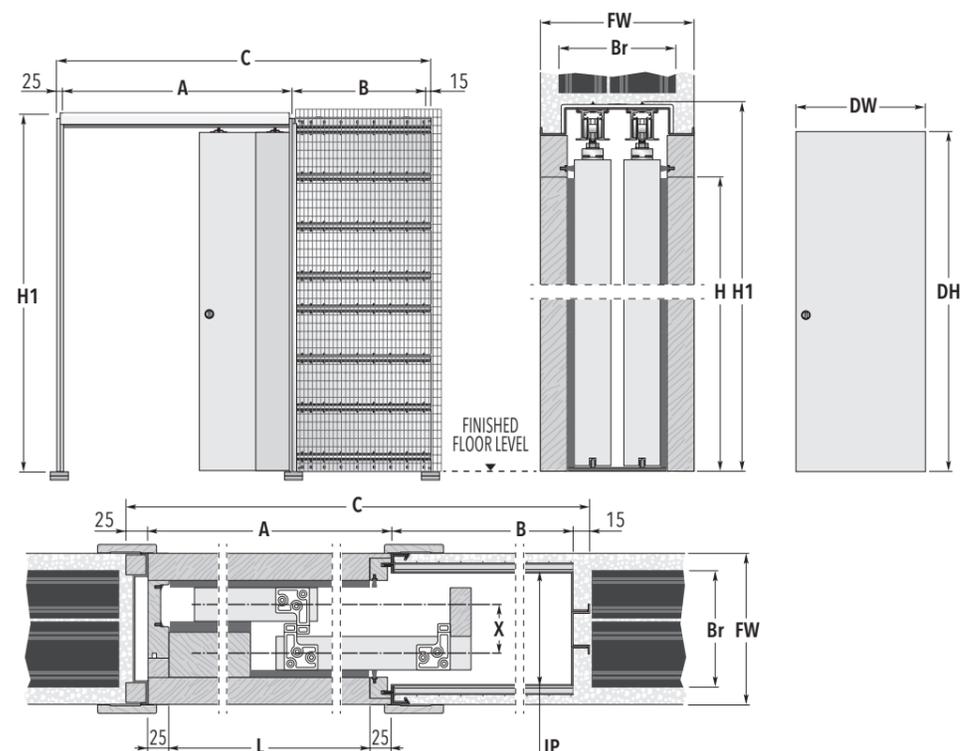

SYSTEMS FOR 2 PARALLEL DOORS - Measures related to Italian standards, other dimensions available

PASSAGE SIZE L x H	OVERALL DIMENSIONS		DOOR PANEL*		
	C x H1	A	B	DW	DH
1140 x 2000/2100	1855 x 2090/2190	1190	625	615 ÷ 635	2010/2110
1340 x 2000/2100	2155 x 2090/2190	1390	725	715 ÷ 735	2010/2110
1540 x 2000/2100	2455 x 2090/2190	1590	825	815 ÷ 835	2010/2110
1740 x 2000/2100	2755 x 2090/2190	1790	925	915 ÷ 935	2010/2110
1940 x 2000/2100	3055 x 2090/2190	1990	1025	1015 ÷ 1035	2010/2110
2140 x 2000/2100	3355 x 2090/2190	2190	1125	1115 ÷ 1135	2010/2110
2340 x 2000/2100	3655 x 2090/2190	2390	1225	1215 ÷ 1235	2010/2110

FINISHED WALL = FW	BRICKS = Br	INTERNAL PASSAGE = IP	X
150 →	120	114	48
180 →	80+60	144	58

NON-STANDARD SIZES

- ▶ Passage width 1140÷2340 mm.
- ▶ Passage height 1000÷2600 mm.

NOTES


- ▶ Max. door thickness 43 mm for FW=180 mm and 40 mm for FW=150 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg.
- ▶ When fully open, the door panels will protrude slightly from the jambs, so the passage width is reduced.
- ▶ ECLISSE counterframes can host any sliding door panel of standard dimensions available on the market.
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.

ACCESSORIES

- ▶ Telescopic synchronisation
- ▶ ECLISSE BIAS®
- ▶ Anti-warp profile

ECLISSE TELESCOPIC SINGLE

STUD WALL

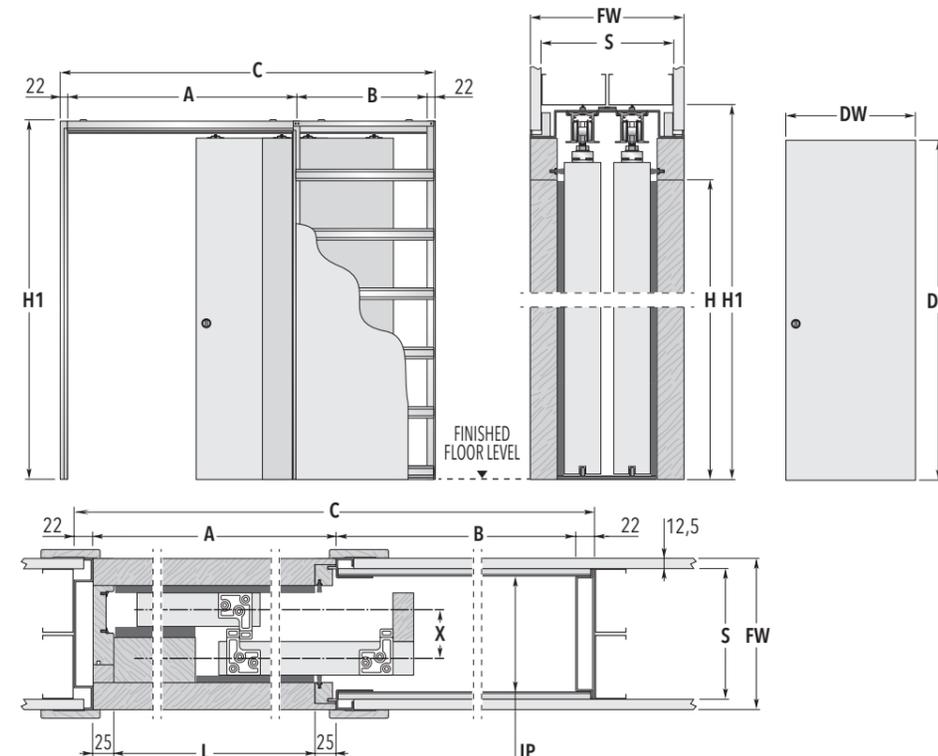

SYSTEMS FOR 2 PARALLEL DOORS - Measures related to Italian standards, other dimensions available

PASSAGE SIZE L x H	OVERALL DIMENSIONS		DOOR PANEL*		
	C x H1	A	B	DW	DH
1140 x 2000/2100	1859 x 2090/2190	1190	625	615 ÷ 635	2010/2110
1340 x 2000/2100	2159 x 2090/2190	1390	725	715 ÷ 735	2010/2110
1540 x 2000/2100	2459 x 2090/2190	1590	825	815 ÷ 835	2010/2110
1740 x 2000/2100	2759 x 2090/2190	1790	925	915 ÷ 935	2010/2110
1940 x 2000/2100	3059 x 2090/2190	1990	1025	1015 ÷ 1035	2010/2110
2140 x 2000/2100	3359 x 2090/2190	2190	1125	1115 ÷ 1135	2010/2110
2340 x 2000/2100	3659 x 2090/2190	2390	1225	1215 ÷ 1235	2010/2110

FINISHED WALL = FW	STUDWORK = S	INTERNAL PASSAGE = IP	X
150 →	100 one plasterboard layer, two on the studwork	103	48
180 →	2x75	134	58

NON-STANDARD SIZES

- ▶ Passage width 1140÷2340 mm.
- ▶ Passage height 1000÷2600 mm.

NOTES

- ▶ Max. door thickness 43 mm for FW=180 mm and 40 mm for FW=150 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg.
- ▶ When fully open, the door panels will protrude slightly from the jambs, so the passage width is reduced.
- ▶ ECLISSE counterframes can host any sliding door panel of standard dimensions available on the market.
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.


ACCESSORIES

- ▶ Telescopic synchronisation
- ▶ ECLISSE BIAS®
- ▶ Anti-warp profile

ECLISSE SINGLE
ECLISSE DOUBLE
ECLISSE LUCE
ECLISSE EWOLUTO®
ECLISSE TELESCOPIC
ECLISSE CIRCULAR
ECLISSE UNILATERAL
ECLISSE NOVANTA
ECLISSE HOIST
ECLISSE TWICE
ECLISSE ACOUSTIC
ECLISSE SYNTHESIS® FLUSH COLLECTION
ECLISSE 40 COLLECTION
BASEBOARDS
ECLISSE DOORS
HANDLES
ACCESSORIES and HARDWARE

ECLISSE TELESCOPIC DOUBLE

SOLID WALL

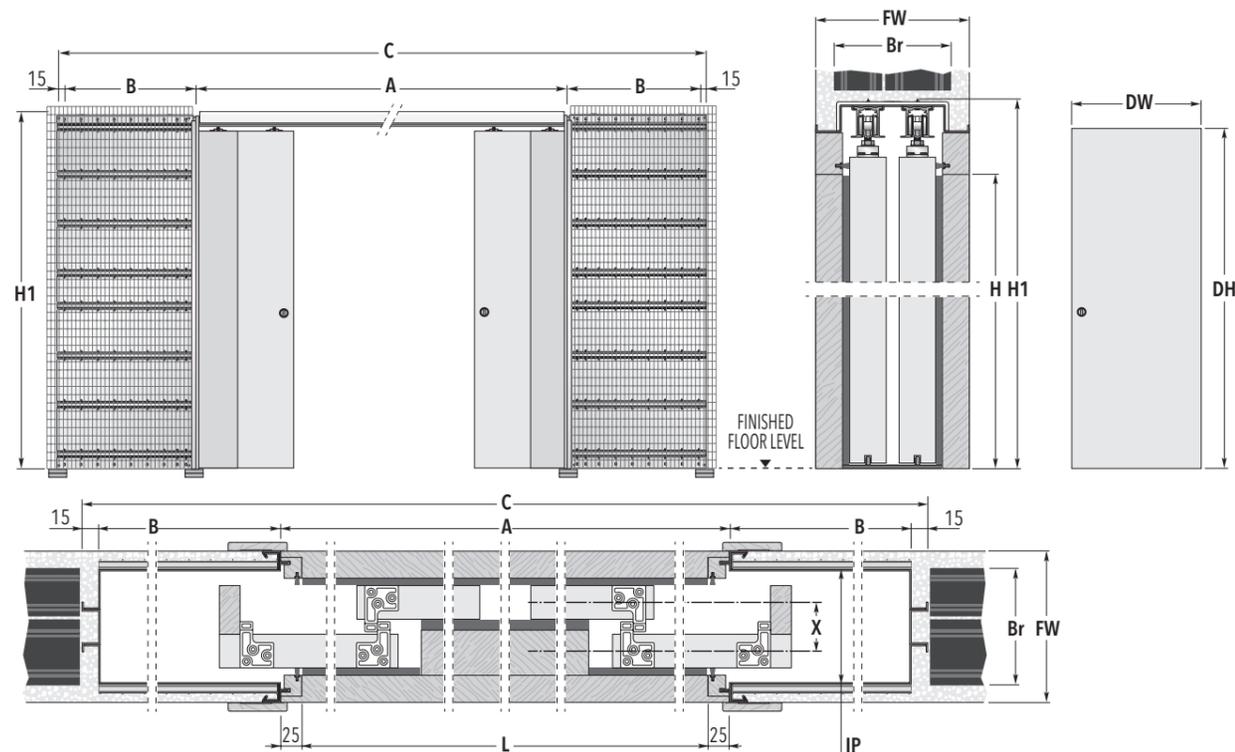

SYSTEMS FOR 2+2 PARALLEL DOORS - Measures related to Italian standards, other dimensions available

PASSAGE SIZE L x H	OVERALL DIMENSIONS			DOOR PANEL*	
	C x H1	A	B	DW	DH
2300 x 2000/2100	3630 x 2090/2190	2350	625	615 ÷ 635	2010/2110
2700 x 2000/2100	4230 x 2090/2190	2750	725	715 ÷ 735	2010/2110
3100 x 2000/2100	4830 x 2090/2190	3150	825	815 ÷ 835	2010/2110
3500 x 2000/2100	5430 x 2090/2190	3550	925	915 ÷ 935	2010/2110
3900 x 2000/2100	6030 x 2090/2190	3950	1025	1015 ÷ 1035	2010/2110
4300 x 2000/2100	6630 x 2090/2190	4350	1125	1115 ÷ 1135	2010/2110
4700 x 2000/2100	7230 x 2090/2190	4750	1225	1215 ÷ 1235	2010/2110

FINISHED WALL = FW	BRICKS = Br	INTERNAL PASSAGE = IP	X
150 →	120	114	48
180 →	80+60	144	58

NON-STANDARD SIZES

- ▶ Passage width 2300÷4700 mm.
- ▶ Passage height 1000÷2600 mm.

NOTES


- ▶ Max. door thickness 43 mm for FW=180 mm and 40 mm for FW=150 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg.
- ▶ When fully open, the door panels will protrude slightly from the jambs, so the passage width is reduced.
- ▶ ECLISSE counterframes can host any sliding door panel of standard dimensions available on the market.
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.

ACCESSORIES

- ▶ Telescopic synchronisation
- ▶ ECLISSE BIAS®
- ▶ Anti-warp profile

ECLISSE TELESCOPIC DOUBLE

STUD WALL

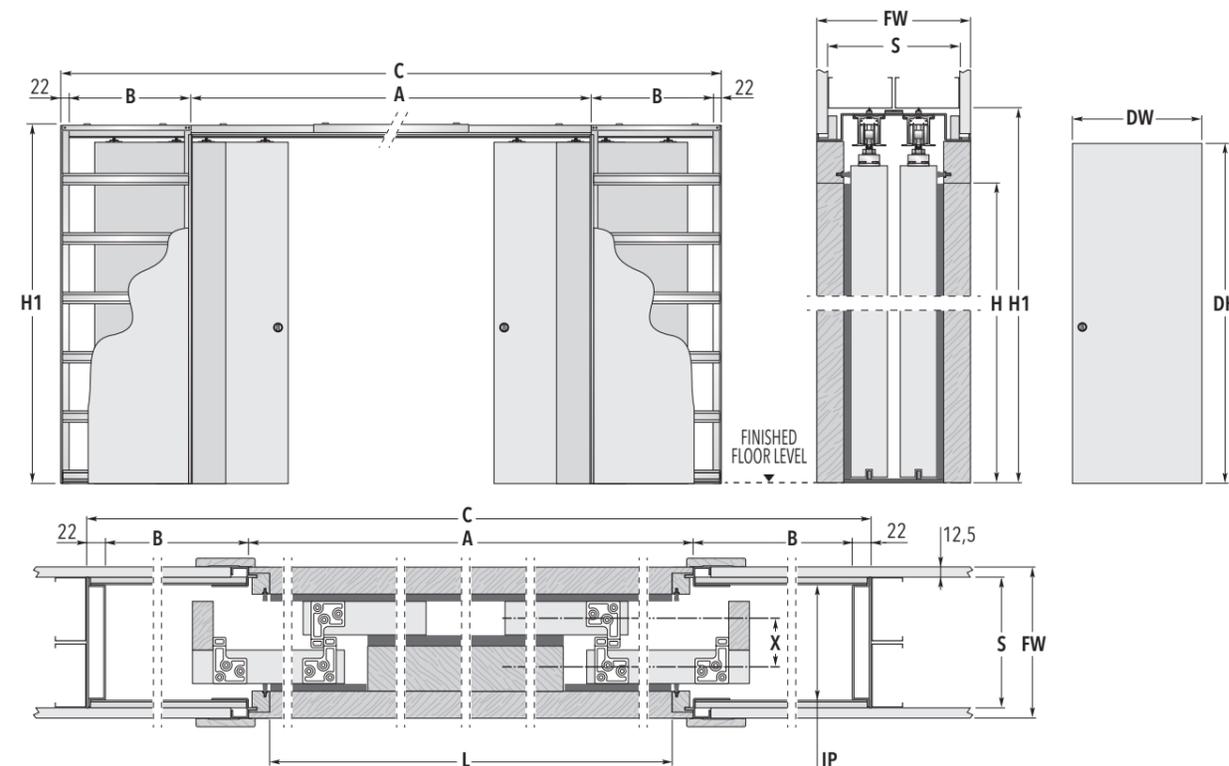

SYSTEMS FOR 2+2 PARALLEL DOORS - Measures related to Italian standards, other dimensions available

PASSAGE SIZE L x H	OVERALL DIMENSIONS			DOOR PANEL*	
	C x H1	A	B	DW	DH
2300 x 2000/2100	3644 x 2090/2190	2350	625	615 ÷ 635	2010/2110
2700 x 2000/2100	4244 x 2090/2190	2750	725	715 ÷ 735	2010/2110
3100 x 2000/2100	4844 x 2090/2190	3150	825	815 ÷ 835	2010/2110
3500 x 2000/2100	5444 x 2090/2190	3550	925	915 ÷ 935	2010/2110
3900 x 2000/2100	6044 x 2090/2190	3950	1025	1015 ÷ 1035	2010/2110
4300 x 2000/2100	6644 x 2090/2190	4350	1125	1115 ÷ 1135	2010/2110
4700 x 2000/2100	7244 x 2090/2190	4750	1225	1215 ÷ 1235	2010/2110

FINISHED WALL = FW	STUDWORK = S	INTERNAL PASSAGE = IP	X
150 →	100 one plasterboard layer, two on the studwork	103	48
180 →	2x75	134	58

NON-STANDARD SIZES

- ▶ Passage width 2300÷4700 mm.
- ▶ Passage height 1000÷2600 mm.

NOTES

- ▶ Max. door thickness 43 mm for FW=180 mm and 40 mm for FW=150 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg.
- ▶ When fully open, the door panels will protrude slightly from the jambs, so the passage width is reduced.
- ▶ ECLISSE counterframes can host any sliding door panel of standard dimensions available on the market.
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.

ACCESSORIES



- ▶ Telescopic synchronisation
- ▶ ECLISSE BIAS®
- ▶ Anti-warp profile

ECLISSE SINGLE
ECLISSE DOUBLE
ECLISSE LUCE
ECLISSE EWOLUTO®
ECLISSE TELESCOPIC
ECLISSE CIRCULAR
ECLISSE UNILATERAL
ECLISSE NOVANTA
ECLISSE HOIST
ECLISSE TWICE
ECLISSE ACOUSTIC
ECLISSE SYNTHESIS® FLUSH COLLECTION
ECLISSE 40 COLLECTION
BASEBOARDS
ECLISSE DOORS
HANDLES
ACCESSORIES and HARDWARE

ECLISSE CIRCULAR

TECHNICAL DETAILS

Curved door panels? Why not? Conceived to offer new solutions to the most diverse needs in interior design, the ECLISSE CIRCULAR system was designed to hide a sliding door into a curved wall, to free creativity and to reinterpret the traditional division of domestic spaces. Available for single curved panel or two facing curved panels.

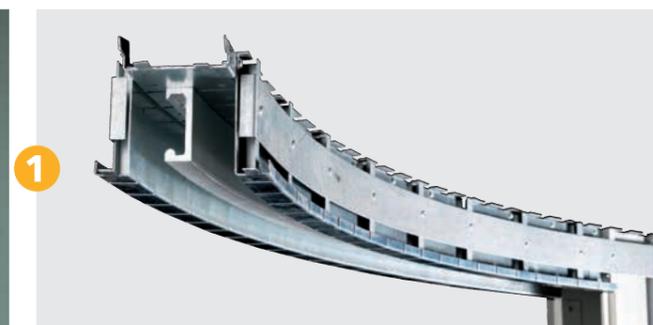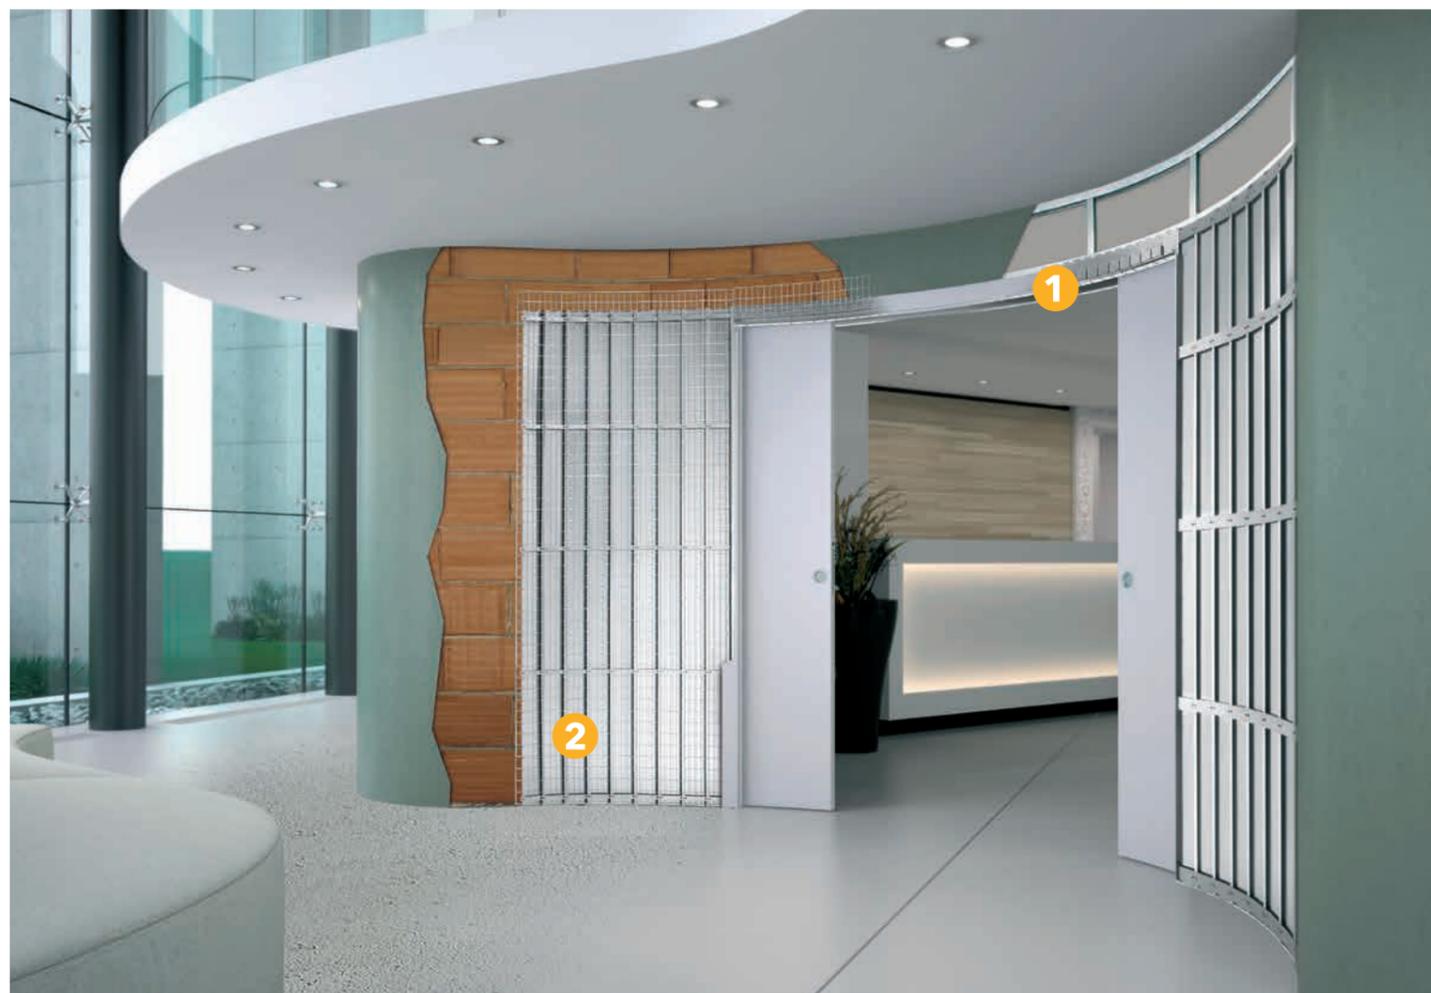

Curved rail
Special double-wheeled runners are designed expressly to slide in curved rails, no matter the radius.



Curved structure
ECLISSE CIRCULAR model structure is made of modular metal sheet, in order to grant a perfect internal sliding passage.



ECLISSE CIRCULAR SINGLE
SOLID WALL

PASSAGE SIZE
L=600÷1200 mm
H=1000÷2600 mm




ECLISSE CIRCULAR DOUBLE
STUD WALL

PASSAGE SIZE
L=600+600÷1200+1200 mm
H=1000÷2600 mm

- ECLISSE SINGLE
- ECLISSE DOUBLE
- ECLISSE LUCE
- ECLISSE EWOLUTO*
- ECLISSE TELESCOPIC
- ECLISSE CIRCULAR**
- ECLISSE UNILATERAL
- ECLISSE NOVANTA
- ECLISSE HOIST
- ECLISSE TWICE
- ECLISSE ACOUSTIC
- ECLISSE SYNTESIS® FLUSH COLLECTION
- ECLISSE 40 COLLECTION
- BASEBOARDS
- ECLISSE DOORS
- HANDLES
- ACCESSORIES and HARDWARE


ECLISSE CIRCULAR SINGLE

SOLID WALL

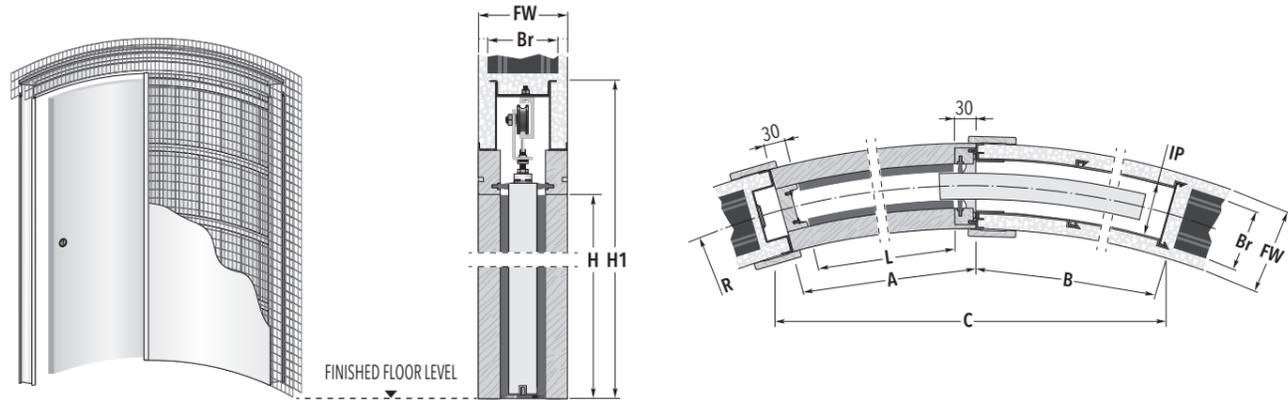

ECLISSE CIRCULAR SINGLE

STUD WALL

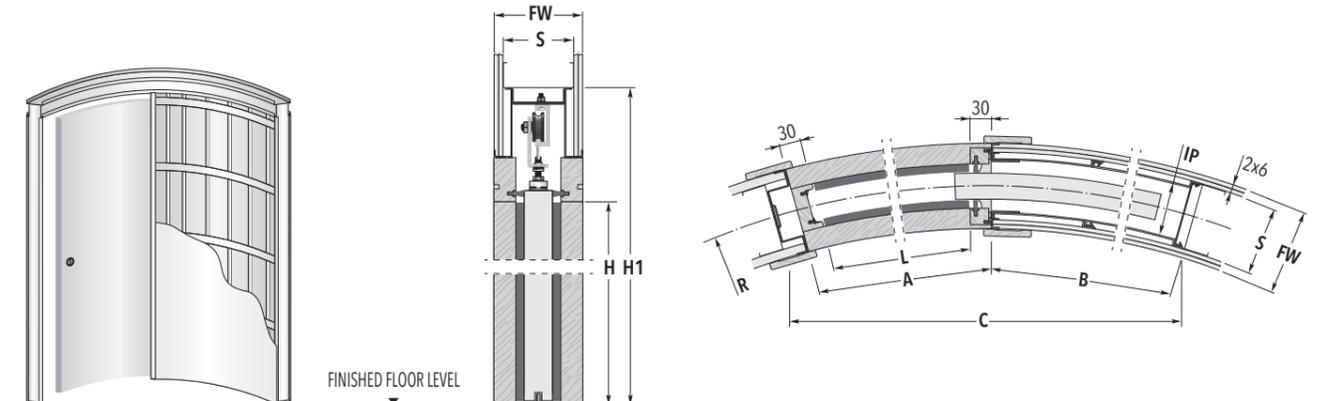

SYSTEMS FOR CURVED SINGLE DOOR - Measures related to Italian standards, other dimensions available

RADIUS R	PASSAGE SIZE LxH	OVERALL DIMENSIONS CxH1	A	B	RADIUS R	PASSAGE SIZE LxH	OVERALL DIMENSIONS CxH1	A	B
1000 →	600 x 2000/2100	1250 x 2158/2258	660	650	1700 →	600 x 2000/2100	1300 x 2158/2258	660	640
	700 x 2000/2100	1390 x 2158/2258	760	735		700 x 2000/2100	1480 x 2158/2258	760	730
	800 x 2000/2100	1545 x 2158/2258	860	860		800 x 2000/2100	1695 x 2158/2258	860	870
	900 x 2000/2100	1650 x 2158/2258	960	940		900 x 2000/2100	1865 x 2158/2258	960	965
	1000 x 2000/2100	1760 x 2158/2258	1060	1055		1000 x 2000/2100	2025 x 2158/2258	1060	1055
1200 →	600 x 2000/2100	1295 x 2158/2258	660	665	1800 →	600 x 2000/2100	1350 x 2158/2258	660	685
	700 x 2000/2100	1450 x 2158/2258	760	755		700 x 2000/2100	1530 x 2158/2258	760	780
	800 x 2000/2100	1600 x 2158/2258	860	840		800 x 2000/2100	1705 x 2158/2258	860	870
	900 x 2000/2100	1770 x 2158/2258	960	970		900 x 2000/2100	1875 x 2158/2258	960	965
	1000 x 2000/2100	1890 x 2158/2258	1060	1055		1000 x 2000/2100	2040 x 2158/2258	1060	1055
1300 →	600 x 2000/2100	1305 x 2158/2258	660	670	2000 →	600 x 2000/2100	1360 x 2158/2258	660	690
	700 x 2000/2100	1470 x 2158/2258	760	760		700 x 2000/2100	1540 x 2158/2258	760	785
	800 x 2000/2100	1625 x 2158/2258	860	850		800 x 2000/2100	1720 x 2158/2258	860	880
	900 x 2000/2100	1775 x 2158/2258	960	935		900 x 2000/2100	1900 x 2158/2258	960	970
	1000 x 2000/2100	1940 x 2158/2258	1060	1065		1000 x 2000/2100	2070 x 2158/2258	1060	1065
1500 →	600 x 2000/2100	1330 x 2158/2258	660	675					
	700 x 2000/2100	1500 x 2158/2258	760	770					
	800 x 2000/2100	1665 x 2158/2258	860	860					
	900 x 2000/2100	1825 x 2158/2258	960	950					
	1000 x 2000/2100	1975 x 2158/2258	1060	1040					

FINISHED WALL = FW	BRICKS = Br	INTERNAL PASSAGE = IP
125 →	100	72

NON-STANDARD SIZES

- ▶ Passage width 600÷1200 mm.
- ▶ Passage height 1000÷2600 mm.
- ▶ Radius 1000÷5000 mm.

NOTES

- ▶ Max. door weight 80 kg.
- ▶ Install at finished floor level.
- ▶ Always specify the opening direction.



SYSTEMS FOR CURVED SINGLE DOOR - Measures related to Italian standards, other dimensions available

RADIUS R	PASSAGE SIZE LxH	OVERALL DIMENSIONS CxH1	A	B	RADIUS R	PASSAGE SIZE LxH	OVERALL DIMENSIONS CxH1	A	B
1000 →	600 x 2000/2100	1250 x 2158/2258	660	650	1700 →	600 x 2000/2100	1300 x 2158/2258	660	640
	700 x 2000/2100	1390 x 2158/2258	760	735		700 x 2000/2100	1480 x 2158/2258	760	730
	800 x 2000/2100	1545 x 2158/2258	860	860		800 x 2000/2100	1695 x 2158/2258	860	870
	900 x 2000/2100	1650 x 2158/2258	960	940		900 x 2000/2100	1865 x 2158/2258	960	965
	1000 x 2000/2100	1760 x 2158/2258	1060	1055		1000 x 2000/2100	2025 x 2158/2258	1060	1055
1200 →	600 x 2000/2100	1295 x 2158/2258	660	665	1800 →	600 x 2000/2100	1350 x 2158/2258	660	685
	700 x 2000/2100	1450 x 2158/2258	760	755		700 x 2000/2100	1530 x 2158/2258	760	780
	800 x 2000/2100	1600 x 2158/2258	860	840		800 x 2000/2100	1705 x 2158/2258	860	870
	900 x 2000/2100	1770 x 2158/2258	960	970		900 x 2000/2100	1875 x 2158/2258	960	965
	1000 x 2000/2100	1890 x 2158/2258	1060	1055		1000 x 2000/2100	2040 x 2158/2258	1060	1055
1300 →	600 x 2000/2100	1305 x 2158/2258	660	670	2000 →	600 x 2000/2100	1360 x 2158/2258	660	690
	700 x 2000/2100	1470 x 2158/2258	760	760		700 x 2000/2100	1540 x 2158/2258	760	785
	800 x 2000/2100	1625 x 2158/2258	860	850		800 x 2000/2100	1720 x 2158/2258	860	880
	900 x 2000/2100	1775 x 2158/2258	960	935		900 x 2000/2100	1900 x 2158/2258	960	970
	1000 x 2000/2100	1940 x 2158/2258	1060	1065		1000 x 2000/2100	2070 x 2158/2258	1060	1065
1500 →	600 x 2000/2100	1330 x 2158/2258	660	675					
	700 x 2000/2100	1500 x 2158/2258	760	770					
	800 x 2000/2100	1665 x 2158/2258	860	860					
	900 x 2000/2100	1825 x 2158/2258	960	950					
	1000 x 2000/2100	1975 x 2158/2258	1060	1040					

FINISHED WALL = FW	STUDWORK = S	INTERNAL PASSAGE = IP
125 →	100	72

NON-STANDARD SIZES

- ▶ Passage width 600÷1200 mm.
- ▶ Passage height 1000÷2600 mm.
- ▶ Radius 1000÷5000 mm.


NOTES

- ▶ Max. door weight 80 kg.
- ▶ Use 2 layers of 6 mm plasterboard on each side of the pocket.
- ▶ Install at finished floor level.
- ▶ Always specify the opening direction.



ECLISSE CIRCULAR DOUBLE

SOLID WALL

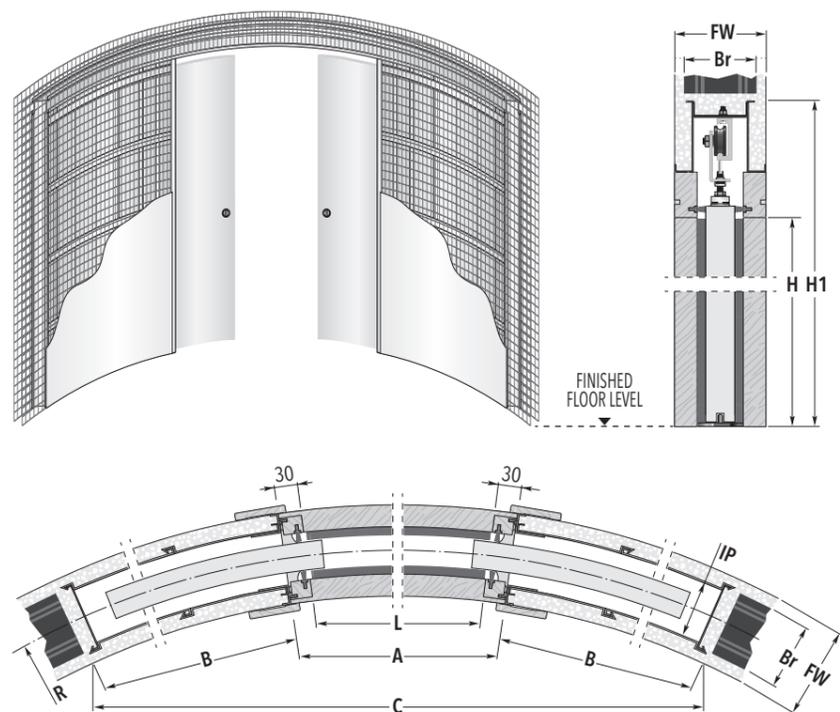

SYSTEMS FOR CURVED DOUBLE DOOR - Measures related to Italian standards, other dimensions available

RADIUS R	PASSAGE SIZE LxH	OVERALL DIMENSIONS CxH1	A	B	RADIUS R	PASSAGE SIZE LxH	OVERALL DIMENSIONS CxH1	A	B
1000 →	1200 x 2000/2100	1870 x 2158/2258	1260	695	1700 →	1200 x 2000/2100	2330 x 2158/2258	1260	640
	1400 x 2000/2100	1840 x 2158/2258	1460	820		1400 x 2000/2100	2660 x 2158/2258	1460	780
1200 →	1200 x 2000/2100	2115 x 2158/2258	1260	665	1800 →	1600 x 2000/2100	2885 x 2158/2258	1660	870
	1400 x 2000/2100	2265 x 2158/2258	1460	800		1800 x 2000/2100	3065 x 2158/2258	1860	965
	1600 x 2000/2100	2295 x 2158/2258	1660	930		2000 x 2000/2100	3225 x 2158/2258	2060	1100
1300 →	1800 x 2000/2100	2180 x 2158/2258	1860	1055	2000 →	1200 x 2000/2100	2355 x 2158/2258	1260	640
	1200 x 2000/2100	2180 x 2158/2258	1260	670		1400 x 2000/2100	2685 x 2158/2258	1460	780
	1400 x 2000/2100	2345 x 2158/2258	1460	760		1600 x 2000/2100	2930 x 2158/2258	1660	875
	1600 x 2000/2100	2460 x 2158/2258	1660	895		1800 x 2000/2100	3135 x 2158/2258	1860	970
1500 →	1800 x 2000/2100	2455 x 2158/2258	1860	1025	2000 →	2000 x 2000/2100	3325 x 2158/2258	2060	1105
	1200 x 2000/2100	2300 x 2158/2258	1260	680		1200 x 2000/2100	2385 x 2158/2258	1260	645
	1400 x 2000/2100	2520 x 2158/2258	1460	770		1400 x 2000/2100	2760 x 2158/2258	1460	785
	1600 x 2000/2100	2730 x 2158/2258	1660	910		1600 x 2000/2100	3030 x 2158/2258	1660	880
1500 →	1800 x 2000/2100	2835 x 2158/2258	1860	1000	2000 →	1800 x 2000/2100	3275 x 2158/2258	1860	975
	2000 x 2000/2100	2875 x 2158/2258	2060	1130		2000 x 2000/2100	3480 x 2158/2258	2060	1070

FINISHED WALL = FW	BRICKS = Br	INTERNAL PASSAGE = IP
125 →	100	72

NON-STANDARD SIZES


- ▶ Passage width 600+600+1200+1200 mm.
- ▶ Passage height 1000+2600 mm.
- ▶ Radius 1000+5000 mm.

NOTES

- ▶ Max. door weight 80 kg.
- ▶ Install at finished floor level.

ECLISSE CIRCULAR DOUBLE

STUD WALL

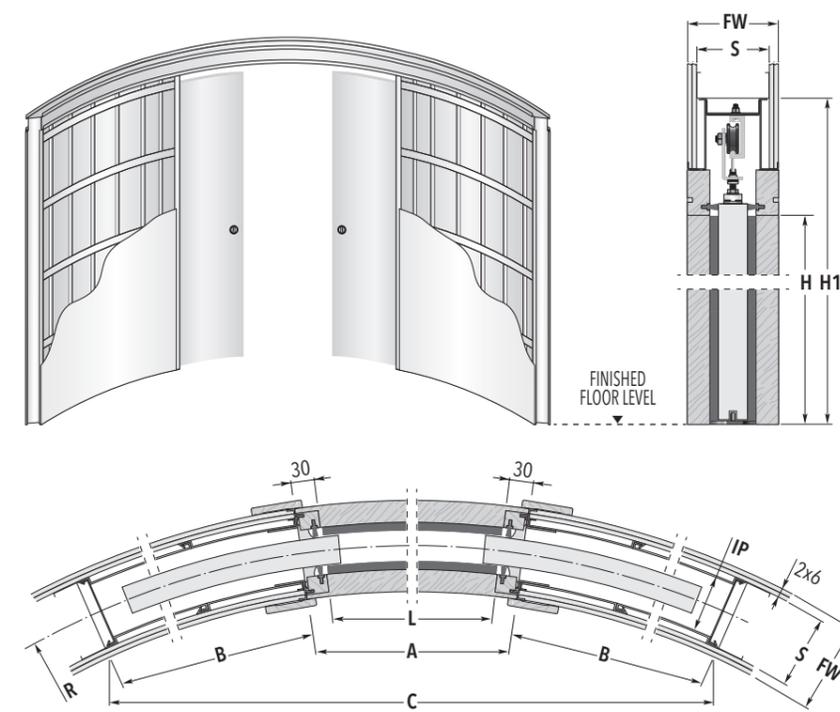

SYSTEMS FOR CURVED DOUBLE DOOR - Measures related to Italian standards, other dimensions available

RADIUS R	PASSAGE SIZE LxH	OVERALL DIMENSIONS CxH1	A	B	RADIUS R	PASSAGE SIZE LxH	OVERALL DIMENSIONS CxH1	A	B
1000 →	1200 x 2000/2100	1870 x 2158/2258	1260	695	1700 →	1200 x 2000/2100	2330 x 2158/2258	1260	640
	1400 x 2000/2100	1840 x 2158/2258	1460	820		1400 x 2000/2100	2660 x 2158/2258	1460	780
1200 →	1200 x 2000/2100	2115 x 2158/2258	1260	665	1800 →	1600 x 2000/2100	2885 x 2158/2258	1660	870
	1400 x 2000/2100	2265 x 2158/2258	1460	800		1800 x 2000/2100	3065 x 2158/2258	1860	965
	1600 x 2000/2100	2295 x 2158/2258	1660	930		2000 x 2000/2100	3225 x 2158/2258	2060	1100
1300 →	1800 x 2000/2100	2180 x 2158/2258	1860	1055	2000 →	1200 x 2000/2100	2355 x 2158/2258	1260	640
	1200 x 2000/2100	2180 x 2158/2258	1260	670		1400 x 2000/2100	2685 x 2158/2258	1460	780
	1400 x 2000/2100	2345 x 2158/2258	1460	760		1600 x 2000/2100	2930 x 2158/2258	1660	875
	1600 x 2000/2100	2460 x 2158/2258	1660	895		1800 x 2000/2100	3135 x 2158/2258	1860	970
1500 →	1800 x 2000/2100	2455 x 2158/2258	1860	1025	2000 →	2000 x 2000/2100	3325 x 2158/2258	2060	1105
	1200 x 2000/2100	2300 x 2158/2258	1260	680		1200 x 2000/2100	2385 x 2158/2258	1260	645
	1400 x 2000/2100	2520 x 2158/2258	1460	770		1400 x 2000/2100	2760 x 2158/2258	1460	785
	1600 x 2000/2100	2730 x 2158/2258	1660	910		1600 x 2000/2100	3030 x 2158/2258	1660	880
1500 →	1800 x 2000/2100	2835 x 2158/2258	1860	1000	2000 →	1800 x 2000/2100	3275 x 2158/2258	1860	975
	2000 x 2000/2100	2875 x 2158/2258	2060	1130		2000 x 2000/2100	3480 x 2158/2258	2060	1070

FINISHED WALL = FW	STUDWORK = S	INTERNAL PASSAGE = IP
125 →	100	72

NON-STANDARD SIZES

- ▶ Passage width 600+600+1200+1200 mm.
- ▶ Passage height 1000+2600 mm.
- ▶ Radius 1000+5000 mm.

NOTES

- ▶ Max. door weight 80 kg.
- ▶ Use 2 layers of 6 mm plasterboard on each side of the pocket.
- ▶ Install at finished floor level.

ECLISSE SINGLE
ECLISSE DOUBLE
ECLISSE LUCE
ECLISSE EWOLUTO®
ECLISSE TELESCOPIC
ECLISSE CIRCULAR
ECLISSE UNILATERAL
ECLISSE NOVANTA
ECLISSE HOIST
ECLISSE TWICE
ECLISSE ACOUSTIC
ECLISSE SYNTESIS® FLUSH COLLECTION
ECLISSE 40 COLLECTION
BASEBOARDS
DOORS
HANDLES
ACCESSORIES and HARDWARE



ECLISSE UNILATERAL

TECHNICAL DETAILS

Two opposite doors into one pocket.


ECLISSE UNILATERAL pocket door system allows two opposite doors to slide in opposite directions but disappearing into the same pocket.

The footprint of a single pocket to give access to two separate, distinct rooms: all the benefits of two sliding doors when there is no room for two counterframes. It is ideal when you need two parallel doors and have a short wall space like in corridors and hall entrances.

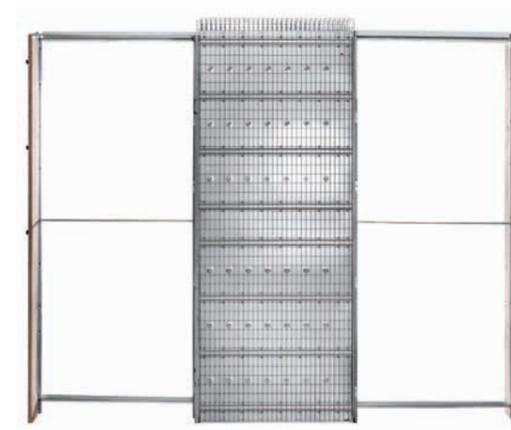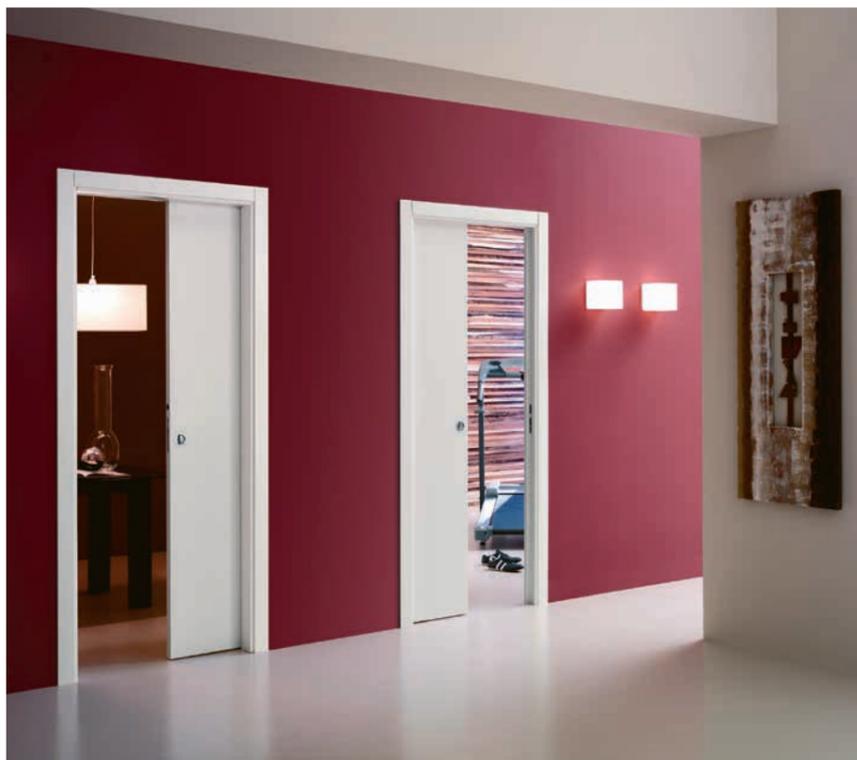

ECLISSE UNILATERAL
SOLID WALL

PASSAGE SIZE
L=600+600÷1000+1000 mm
H=1000÷2600 mm

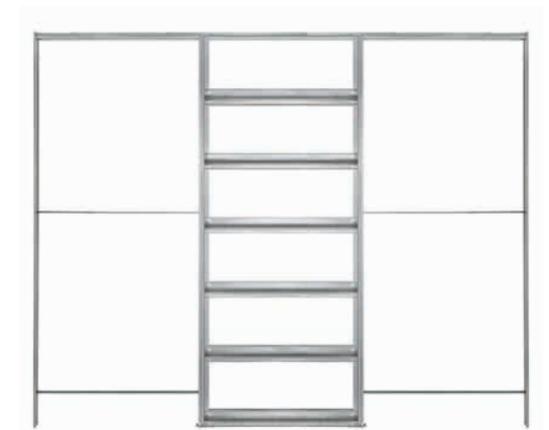


ECLISSE UNILATERAL
STUD WALL

PASSAGE SIZE
L=600+600÷1000+1000 mm
H=1000÷2600 mm

ECLISSE UNILATERAL

SOLID WALL

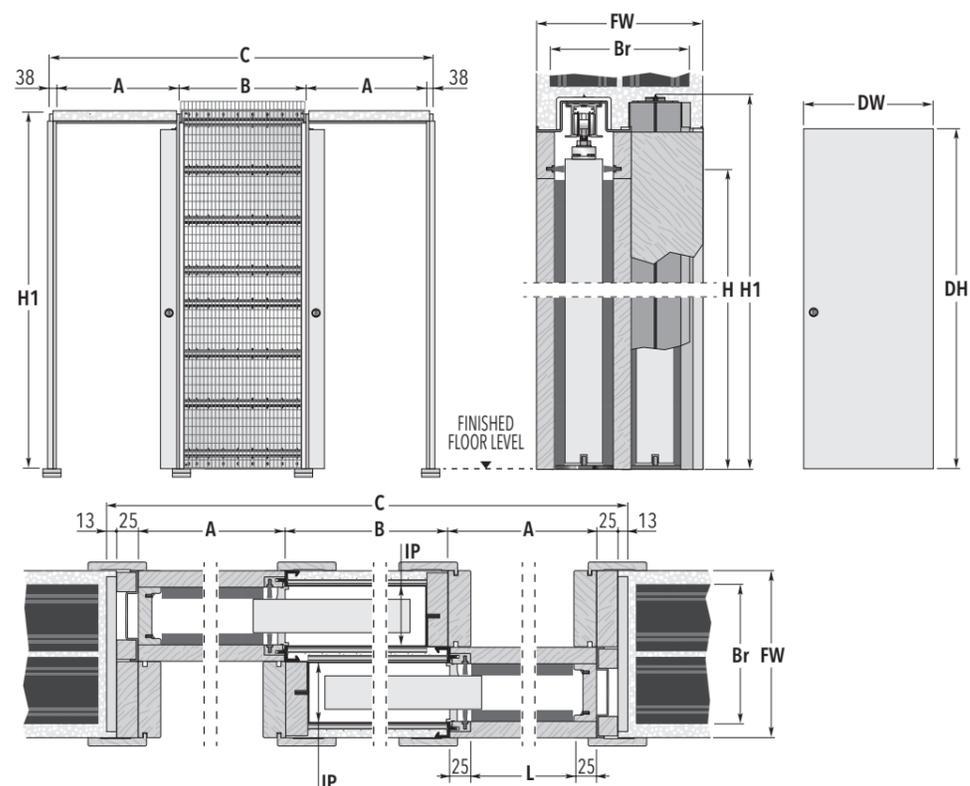

SYSTEMS FOR 2 DOORS SIDE BY SIDE - Measures related to Italian standards, other dimensions available

PASSAGE SIZE L x H	OVERALL DIMENSIONS		DOOR PANEL*		
	C x H1	A	B	DW	DH
600+600 x 2000/2100	2026 x 2090/2190	650	650	615 ÷ 635	2010/2110
650+650 x 2000/2100	2226 x 2090/2190	700	750	665 ÷ 735	2010/2110
700+700 x 2000/2100	2326 x 2090/2190	750	750	715 ÷ 735	2010/2110
750+750 x 2000/2100	2526 x 2090/2190	800	850	765 ÷ 835	2010/2110
800+800 x 2000/2100	2626 x 2090/2190	850	850	815 ÷ 835	2010/2110
850+850 x 2000/2100	2826 x 2090/2190	900	950	865 ÷ 935	2010/2110
900+900 x 2000/2100	2926 x 2090/2190	950	950	915 ÷ 935	2010/2110
950+950 x 2000/2100	3126 x 2090/2190	1000	1050	965 ÷ 1035	2010/2110
1000+1000 x 2000/2100	3226 x 2090/2190	1050	1050	1015 ÷ 1035	2010/2110

FINISHED WALL = FW	BRICKS = Br	INTERNAL PASSAGE = IP
200 →	80+80	72+72

NON-STANDARD SIZES

- ▶ Passage width 600+600+1000+1000 mm.
- ▶ Passage height 1000÷2600 mm.

NOTES

- ▶ When using pocket with internal dims of 54 mm max. door thickness 40 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg (150 kg on request).
- ▶ ECLISSE counterframes can host any sliding door panel of standard dimensions available on the market.
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.
- ▶ Always specify the opening direction.


ACCESSORIES

- ▶ ECLISSE BIAS®
- ▶ ECLISSE BIAS® DS
- ▶ ECLISSE PUSH&PULL C
- ▶ Self-closing system
- ▶ Motorisation
- ▶ Anti-warp profile



ECLISSE UNILATERAL

STUD WALL

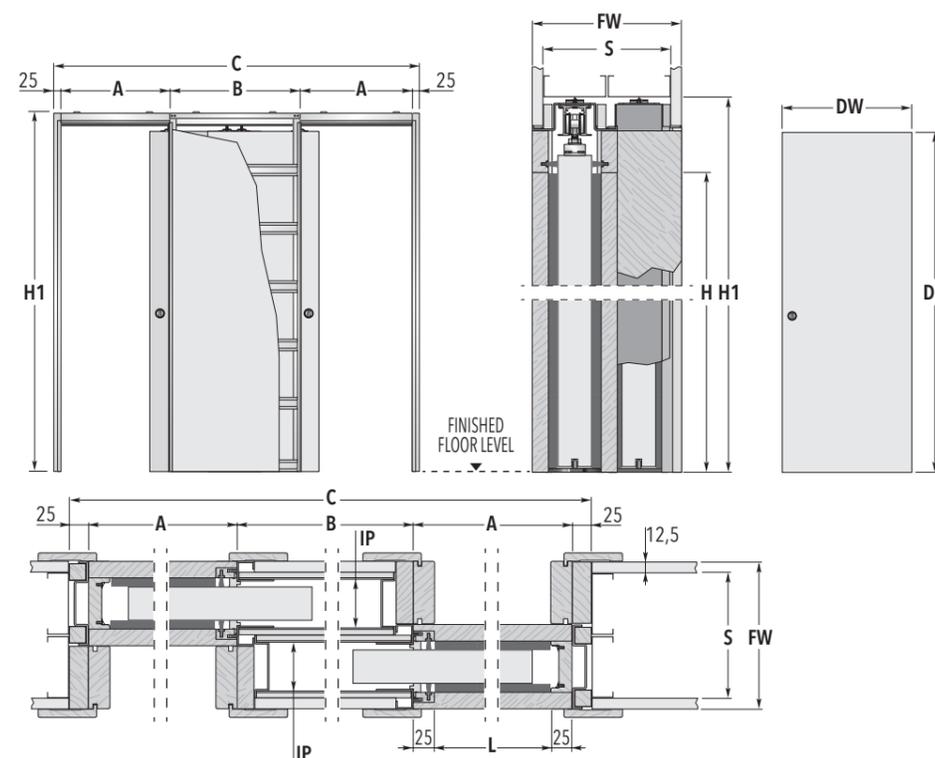

SYSTEMS FOR 2 DOORS SIDE BY SIDE - Measures related to Italian standards, other dimensions available

PASSAGE SIZE L x H	OVERALL DIMENSIONS		DOOR PANEL*		
	C x H1	A	B	DW	DH
600+600 x 2000/2100	2010 x 2090/2190	650	660	615 ÷ 635	2010/2110
650+650 x 2000/2100	2210 x 2090/2190	700	760	665 ÷ 735	2010/2110
700+700 x 2000/2100	2310 x 2090/2190	750	760	715 ÷ 735	2010/2110
750+750 x 2000/2100	2510 x 2090/2190	800	860	765 ÷ 835	2010/2110
800+800 x 2000/2100	2610 x 2090/2190	850	860	815 ÷ 835	2010/2110
850+850 x 2000/2100	2810 x 2090/2190	900	960	865 ÷ 935	2010/2110
900+900 x 2000/2100	2910 x 2090/2190	950	960	915 ÷ 935	2010/2110
950+950 x 2000/2100	3110 x 2090/2190	1000	1060	965 ÷ 1035	2010/2110
1000+1000 x 2000/2100	3210 x 2090/2190	1050	1060	1015 ÷ 1035	2010/2110

FINISHED WALL = FW	STUDWORK = S	INTERNAL PASSAGE = IP
175 →	2x75	54+54

NON-STANDARD SIZES

- ▶ Passage width 600+600+1000+1000 mm.
- ▶ Passage height 1000÷2600 mm.

NOTES

- ▶ When using pocket with internal dims of 54 mm max. door thickness 40 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg (150 kg on request).
- ▶ ECLISSE counterframes can host any sliding door panel of standard dimensions available on the market.
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.
- ▶ Always specify the opening direction.

ACCESSORIES


- ▶ ECLISSE BIAS®
- ▶ ECLISSE BIAS® DS
- ▶ ECLISSE PUSH&PULL C
- ▶ Self-closing system
- ▶ Motorisation
- ▶ Anti-warp profile




ECLISSE SINGLE
ECLISSE DOUBLE
ECLISSE LUCE
ECLISSE EWOLUTO®
ECLISSE TELESCOPIC
ECLISSE CIRCULAR
ECLISSE UNILATERAL
ECLISSE NOVANTA
ECLISSE HOIST
ECLISSE TWICE
ECLISSE ACOUSTIC
ECLISSE SYNTHESIS® FLUSH COLLECTION
ECLISSE 40 COLLECTION
BASEBOARDS
ECLISSE DOORS
HANDLES
ACCESSORIES and HARDWARE

ECLISSE NOVANTA


TECHNICAL DETAILS

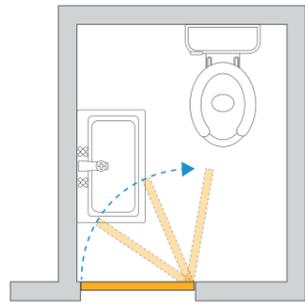



It is often the case that a full hinged door restricts the furnishing options when space is limited.

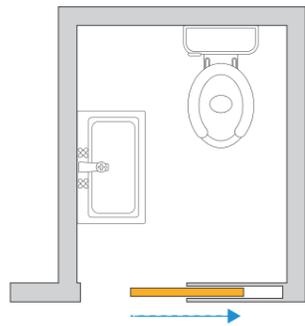

Sometimes, however, there is not even enough space to install a counterframe for a pocket door.

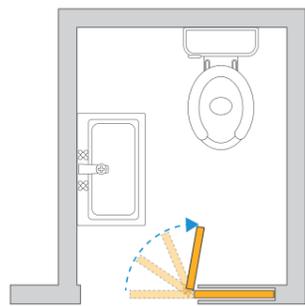


With ECLISSE NOVANTA half of the door slides into the wall while the other half is hinged and swings in.

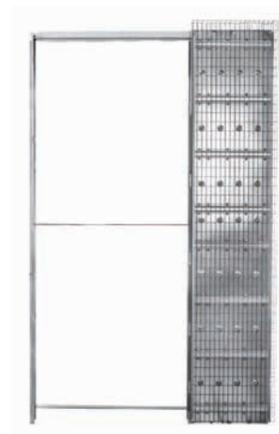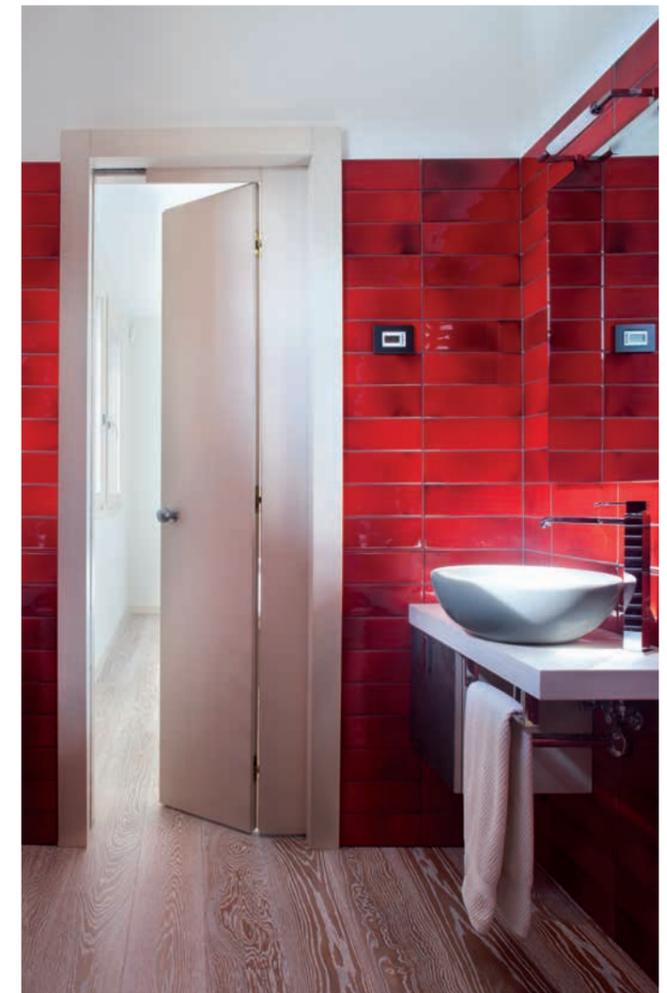

ECLISSE NOVANTA
SOLID WALL

PASSAGE SIZE
L=600÷1200 mm
H=1000÷2600 mm

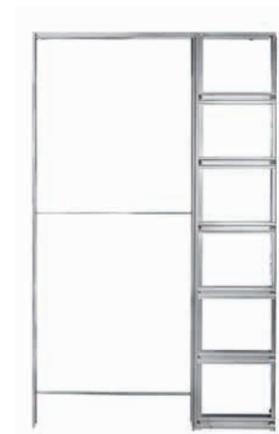

ECLISSE NOVANTA
STUD WALL


PASSAGE SIZE
L=600+1200 mm
H=1000÷2600 mm



- ECLISSE SINGLE
- ECLISSE DOUBLE
- ECLISSE LUCE
- ECLISSE EWOLUTO*
- ECLISSE TELESCOPIC
- ECLISSE CIRCULAR
- ECLISSE UNILATERAL
- ECLISSE NOVANTA**
- ECLISSE HOIST
- ECLISSE TWICE
- ECLISSE ACOUSTIC
- ECLISSE FLUSH COLLECTION
- ECLISSE SYNTESIS* COLLECTION
- ECLISSE 40 COLLECTION
- BASEBOARDS
- ECLISSE DOORS
- HANDLES
- ACCESSORIES and HARDWARE

ECLISSE NOVANTA

SOLID WALL

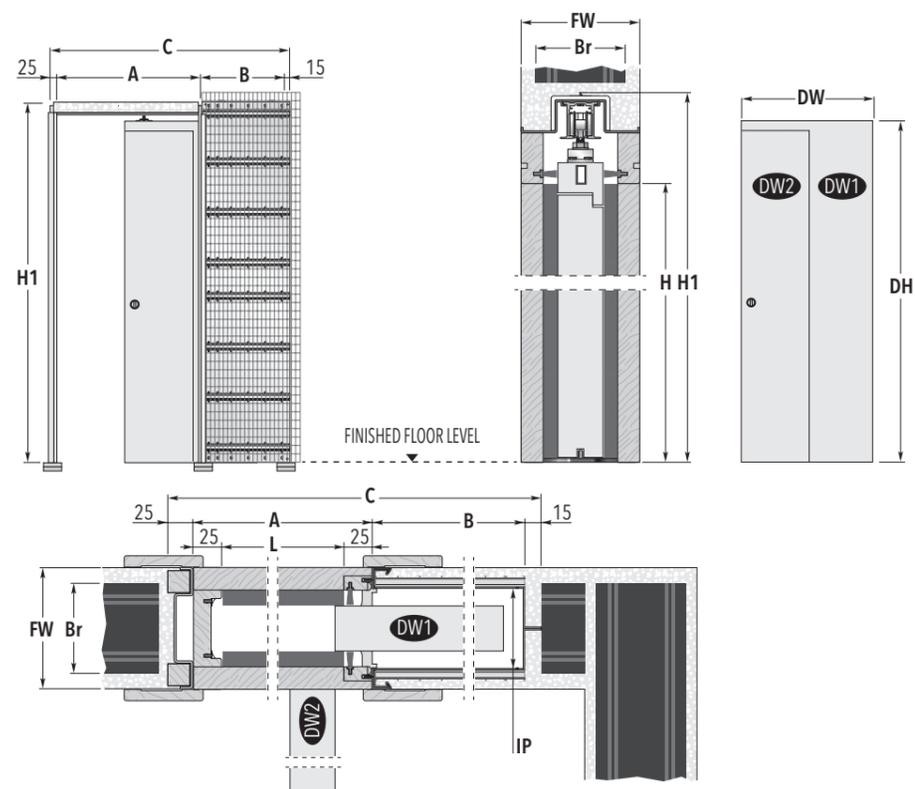

SYSTEMS FOR SECTIONAL DOOR - Measures related to Italian standards, other dimensions available

PASSAGE SIZE L x H	OVERALL DIMENSIONS		DOOR PANEL*			
	C x H1	A	B	DW1	DW2	DH
600 x 2000/2100	1015 x 2090/2190	650	325	350	310	2010/2110
700 x 2000/2100	1215 x 2090/2190	750	425	400	360	2010/2110
800 x 2000/2100	1315 x 2090/2190	850	425	450	410	2010/2110
900 x 2000/2100	1515 x 2090/2190	950	525	500	460	2010/2110
1000 x 2000/2100	1615 x 2090/2190	1050	525	550	510	2010/2110

FINISHED WALL = FW	BRICKS = Br	INTERNAL PASSAGE = IP
90	→ 60	54
108	→ 80	72
125	→ 100	89
150	→ 120	114

NON-STANDARD SIZES

- ▶ Passage width 600÷1200 mm.
- ▶ Passage height 1000÷2600 mm.

NOTES

- ▶ When using pocket with internal dims of 54 mm max. door thickness 40 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg.
- ▶ ECLISSE NOVANTA hosts a single fold-and-slide door.
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.
- ▶ Always specify the opening direction.


ACCESSORIES

- ▶ Anti-warp profile



ECLISSE NOVANTA

STUD WALL

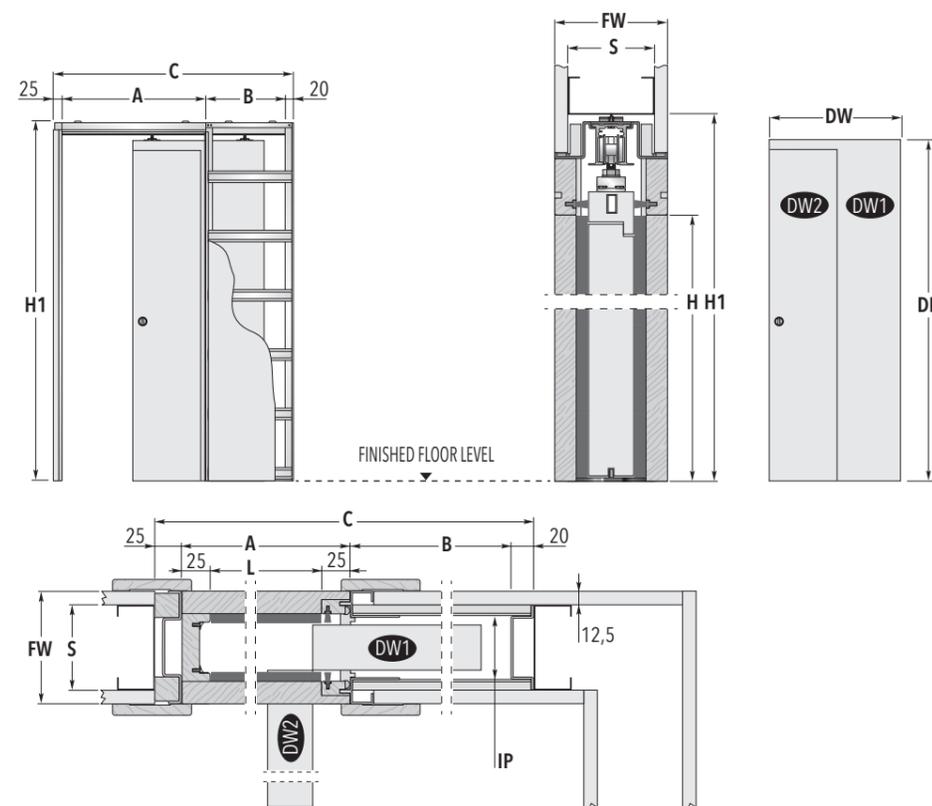

SYSTEMS FOR SECTIONAL DOOR - Measures related to Italian standards, other dimensions available

PASSAGE SIZE L x H	OVERALL DIMENSIONS		DOOR PANEL*			
	C x H1	A	B	DW1	DW2	DH
600 x 2000/2100	1010 x 2090/2190	650	315	350	310	2010/2110
700 x 2000/2100	1210 x 2090/2190	750	415	400	360	2010/2110
800 x 2000/2100	1310 x 2090/2190	850	415	450	410	2010/2110
900 x 2000/2100	1510 x 2090/2190	950	515	500	460	2010/2110
1000 x 2000/2100	1610 x 2090/2190	1050	515	550	510	2010/2110

FINISHED WALL = FW	STUDWORK = S	INTERNAL PASSAGE = IP
100	→ 75	54
125	→ 100	79

NON-STANDARD SIZES

- ▶ Passage width 600÷1200 mm.
- ▶ Passage height 1000÷2600 mm.

NOTES

- ▶ When using pocket with internal dims of 54 mm max. door thickness 40 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg.
- ▶ ECLISSE NOVANTA hosts a single fold-and-slide door.
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.
- ▶ Always specify the opening direction.

ACCESSORIES


- ▶ Anti-warp profile



ECLISSE SINGLE
ECLISSE DOUBLE
ECLISSE LUCE
ECLISSE EWOLUTO*
ECLISSE TELESCOPIC
ECLISSE CIRCULAR
ECLISSE UNILATERAL
ECLISSE NOVANTA
ECLISSE HOIST
ECLISSE TWICE
ECLISSE ACOUSTIC
ECLISSE FLUSH COLLECTION
ECLISSE 40 COLLECTION
BASEBOARDS
ECLISSE DOORS
HANDLES
ACCESSORIES and HARDWARE

ECLISSE HOIST

SOLUTION FOR DISABLED ACCESSSES

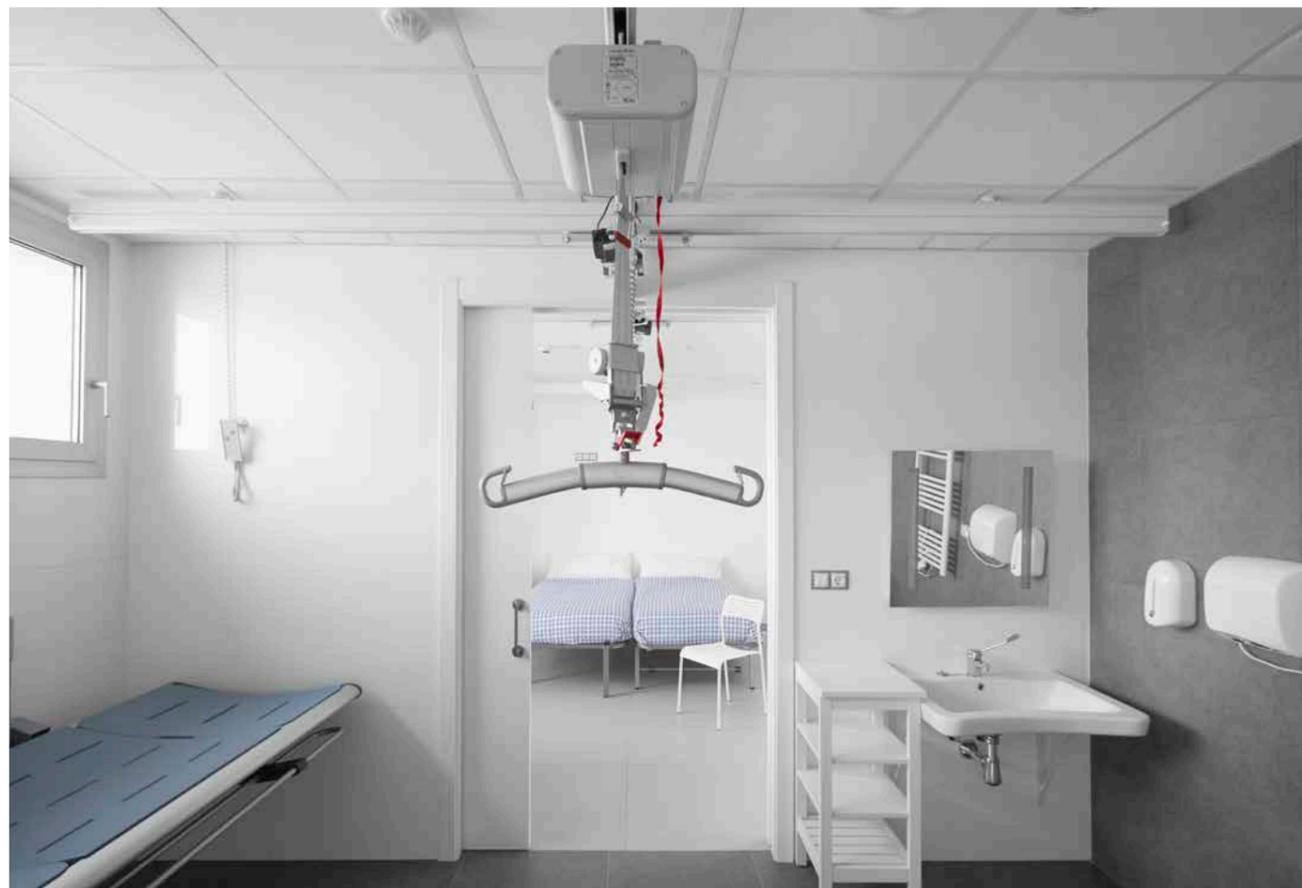

ECLISSE HOIST is a variation of the standard models ECLISSE SINGLE, ECLISSE LUCE SINGLE and ECLISSE EWOLUTO® SINGLE.

It represents a solution that eliminates architectural barriers so any interior space can benefit from the advantages of a sliding pocket door system. The special conformation of the track does not interfere with the rail of the motorized lifting device, allowing at the same time the unhindered passage from room to room and the closing of the door.

ECLISSE HOIST can be installed on models starting with a minimum passage width of 900 mm (considering that the door panel protrudes by 100 mm to allow the installation of the push handle, the net passage width is 800 mm). Door panel maximum weight is 60 kg.


ECLISSE HOIST is custom designed on a project.



Sliding pocket door systems offer more space and greater manoeuvrability.


Of course more usable space and no intrusion into corridors are advantages everyone can appreciate and value, but if you are a wheelchair user or have difficulty in mobility it is clearly much, much easier to pass through a sliding pocket door. The uncomfortable backward and forward motion needed when using a hinged door is completely eliminated. This is also the case for anyone using walking aids, blind or visually impaired people, as the danger of the leading edge is removed.

TRADITIONAL HINGED DOOR

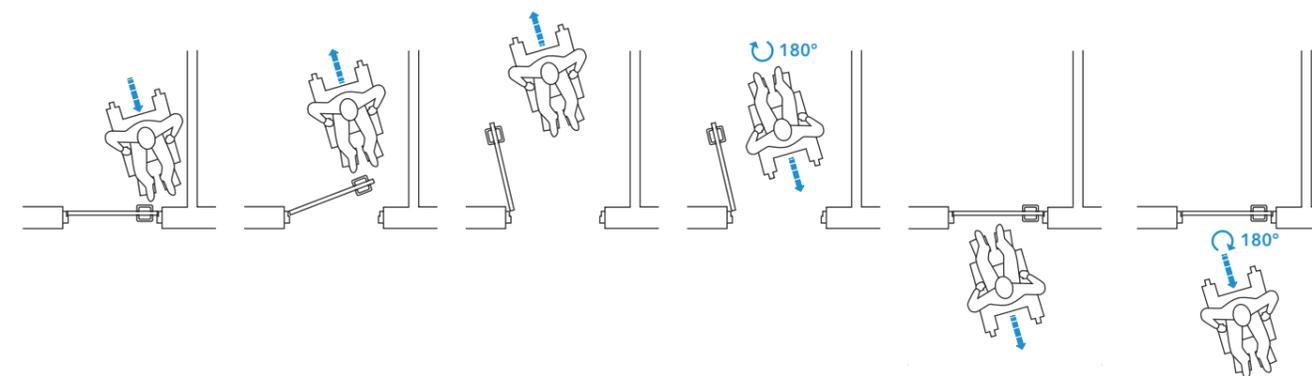

- 1** Get closer to the door, lean towards it to grab the handle.
- 2** With one hand open the door, with the other push the wheelchair backwards.
- 3** To allow the wheelchair to pass through the swing door must be completely open.
- 4** Turn the wheelchair 180°.
- 5** Proceed backwards through the door while holding the handle to close the door.
- 6** Rotate 180° and proceed.

ECLISSE SLIDING POCKET DOOR

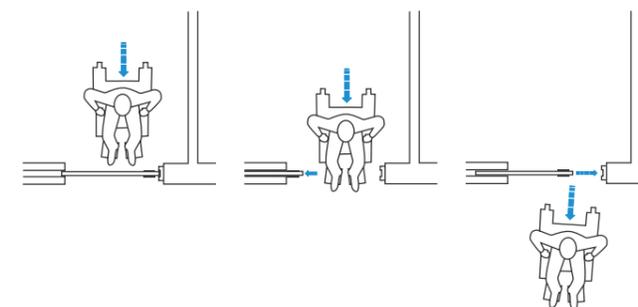

- 1** Get closer to the sliding door and open it.
- 2** Go through the door and close it.
- 3** Close the door and proceed.




- ECLISSE SINGLE
- ECLISSE DOUBLE
- ECLISSE LUCE
- ECLISSE EWOLUTO®
- ECLISSE TELESCOPIC
- ECLISSE CIRCULAR
- ECLISSE UNILATERAL
- ECLISSE NOVANTA
- ECLISSE HOIST
- ECLISSE TWICE
- ECLISSE ACOUSTIC
- ECLISSE SYNTESIS® FLUSH COLLECTION
- ECLISSE 40 COLLECTION
- BASEBOARDS
- DOORS
- HANDLES
- ACCESSORIES and HARDWARE

ECLISSE TWICE

TECHNICAL DETAILS

ECLISSE TWICE allows you to transform a sliding pocket door into a large hinged opening, by simply pulling a lever. A solution that makes it possible to temporarily double the passage size, extremely useful in hospitals or industrial premises, to facilitate the passage of beds or large equipment.

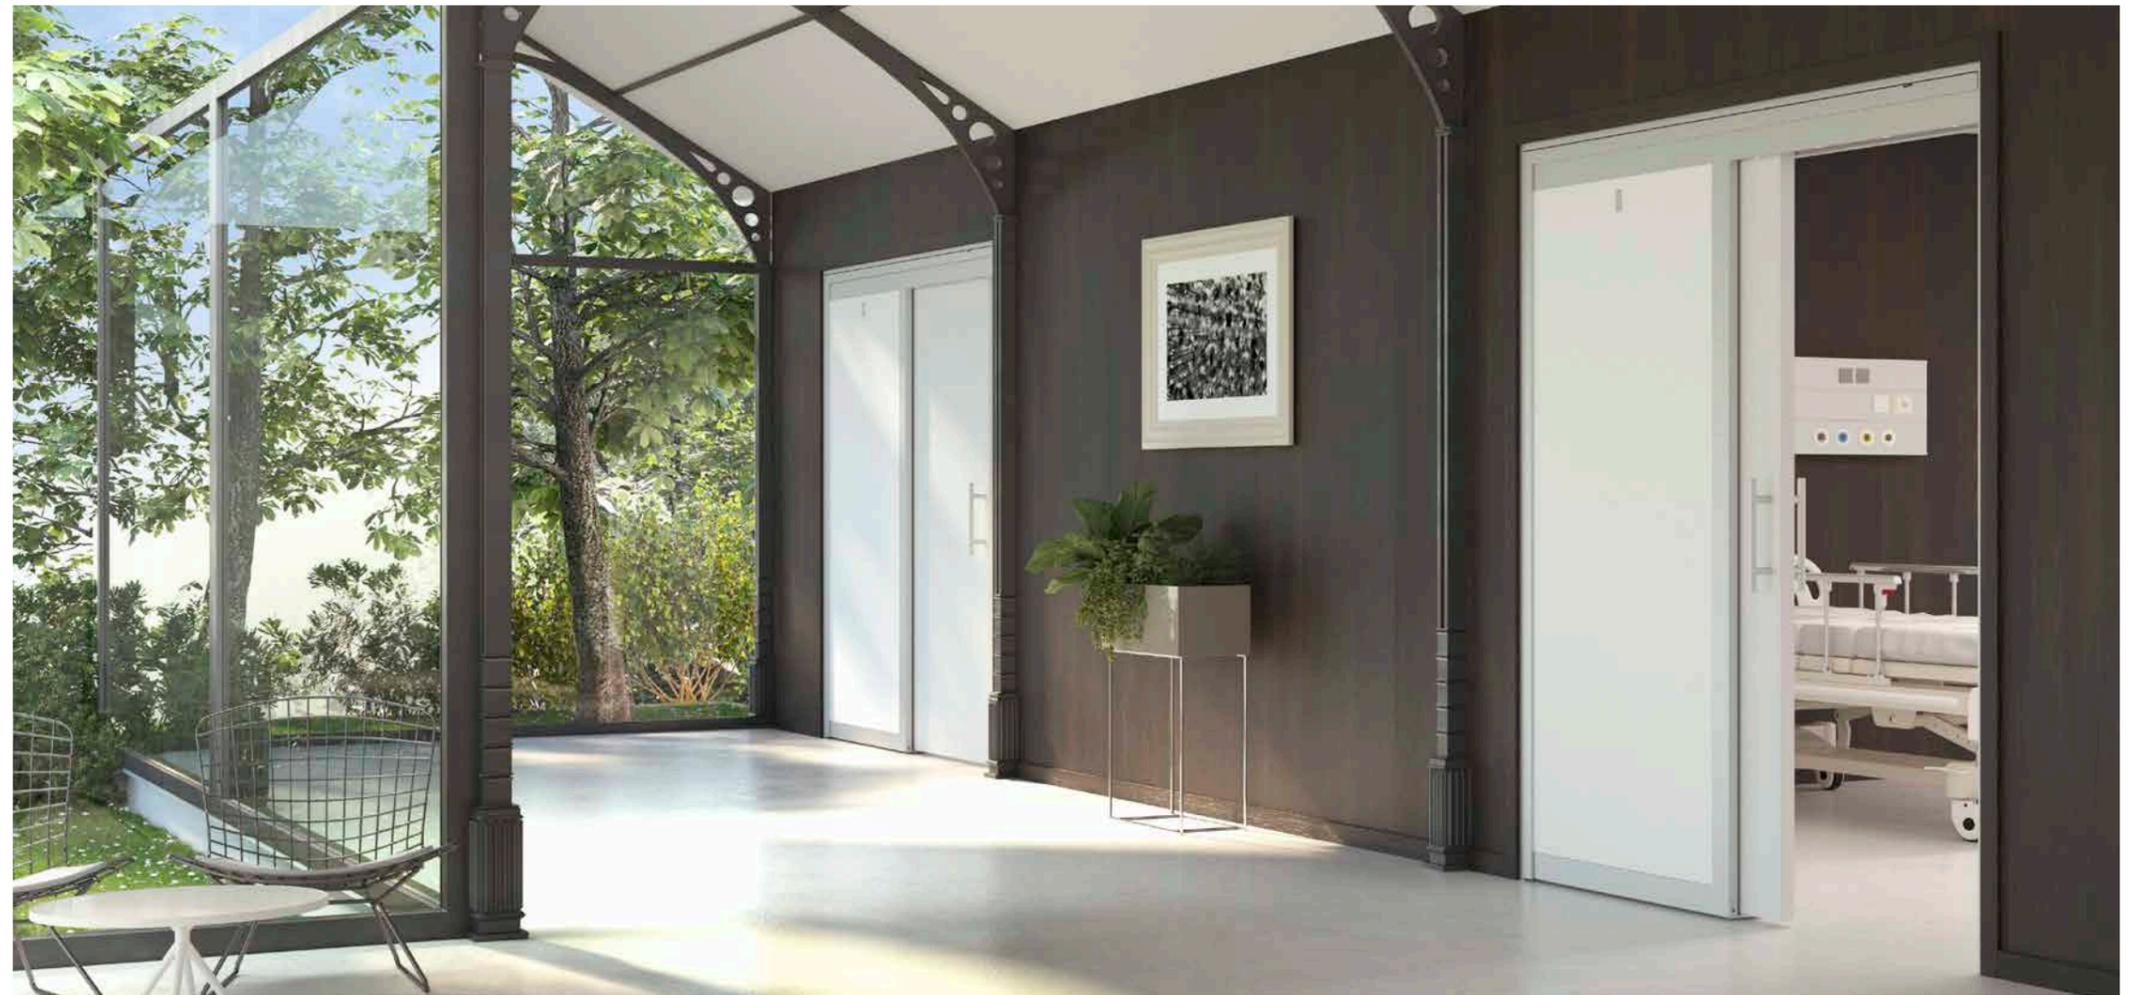

ECLISSE TWICE is made of one anodized aluminium structure and two wooden lateral panels. The profile is available in aluminium finish or painted in RAL colours. The panels are made of white primer-coated melamine faced eco-friendly chipboard, ready to be painted.

For cleaning and maintenance, take off the side panels by simply removing the screw located under the pin handle.


- ECLISSE SINGLE
- ECLISSE DOUBLE
- ECLISSE LUCE
- ECLISSE EWOLUTO*
- ECLISSE TELESCOPIC
- ECLISSE CIRCULAR
- ECLISSE UNILATERAL
- ECLISSE NOVANTA
- ECLISSE HOIST
- ECLISSE TWICE
- ECLISSE ACOUSTIC
- ECLISSE SYNTESIS® FLUSH COLLECTION
- ECLISSE 40 COLLECTION
- BASEBOARDS
- DOORS
- HANDLES
- ACCESSORIES and HARDWARE

ECLISSE ACOUSTIC

ACOUSTIC KIT

SILENCE HAS MORE SPACE

Door, jambs, gaskets and weatherstrips for sound insulation. ECLISSE ACOUSTIC is an integrated system with high soundproof performances designed specifically to reduce the noise between rooms. All the advantages of a sliding pocket door system associated with the acoustic comfort.

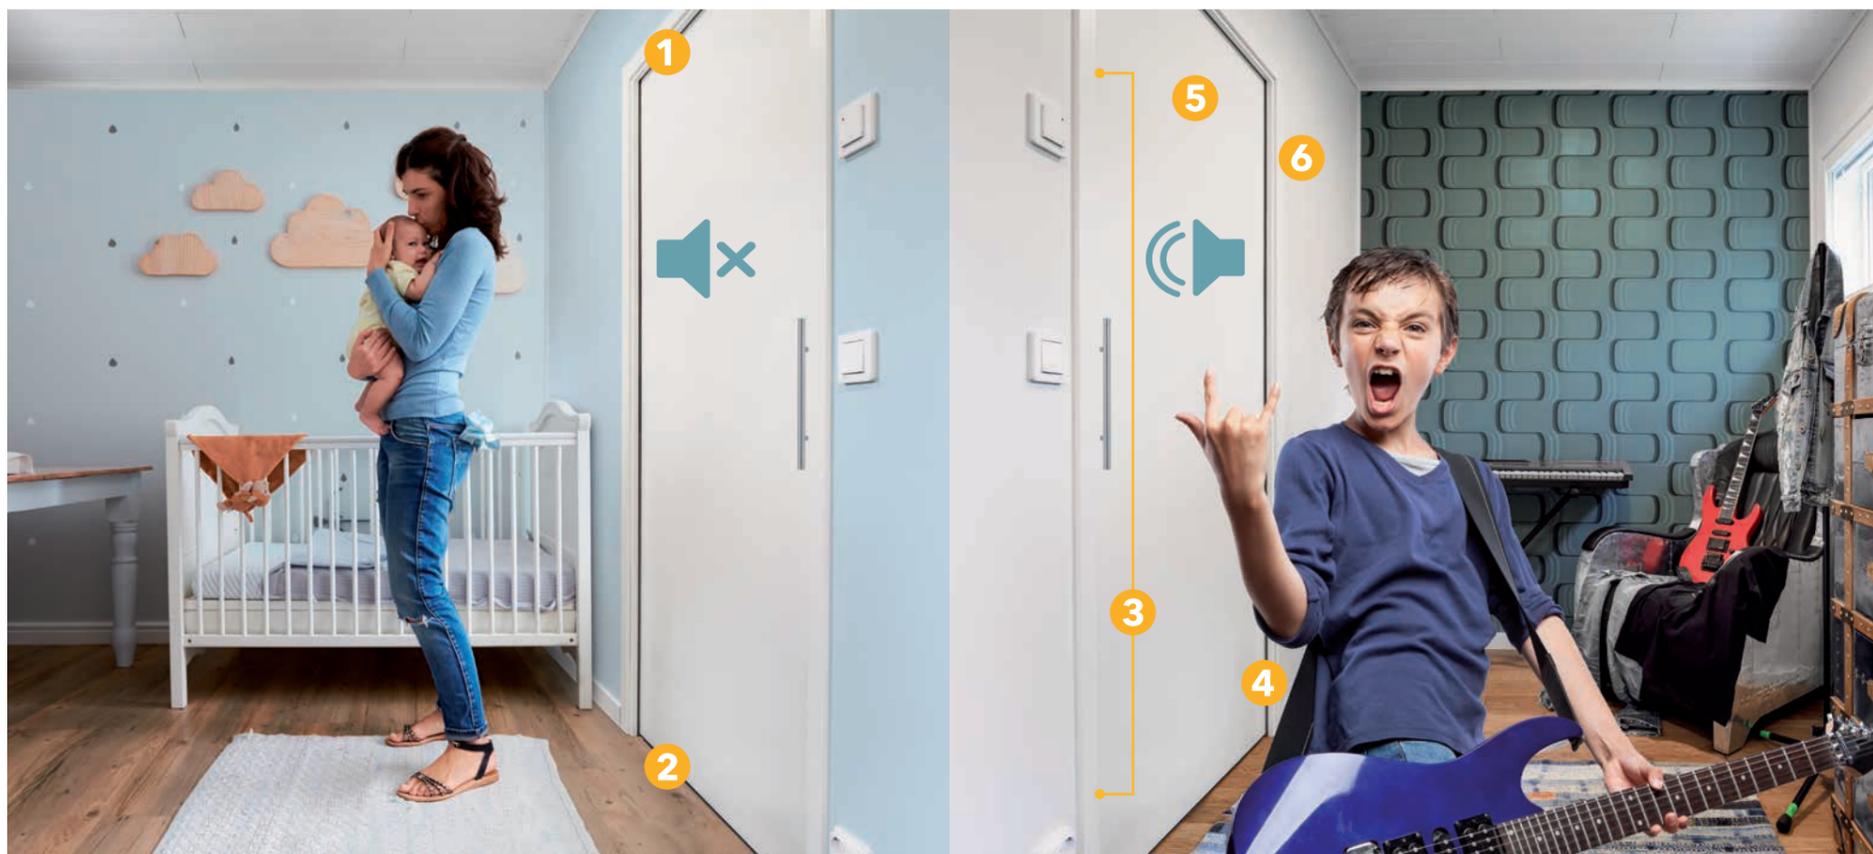

5 Door panel
The special stratigraphy of the door guarantees a high soundproofing performance. The acoustic sliding panel is 40 mm thick and is supplied as standard already set for the installation of accessories. The door is available in raw untreated Tanganyika walnut finish and in lacquered RAL colours.

6 Jambs and Architraves
The acoustic jambs are already milled and ready for the installation of the acoustic gaskets.

1

2



OPEN DOOR



CLOSED DOOR

Upper weatherstrip

Inserted into the upper milling of the door panel, it opens when the door closes. The high quality materials allows to preserve over time the original acoustic performance.



OPEN DOOR



CLOSED DOOR

Lower weatherstrip

Inserted in the lower milling of the door panel, it rises and falls at every opening and closing of the door. The rounded and flexible shape wraps the draughts accurately while the high quality materials allows to preserve over time the original acoustic performance.


TECHNICAL DATA

Noise abatement 38 dB (-1; -3)
Test performed on a 890x2030 mm frame, installed to perfection, equipped with blind shell lock.


REFERENCE NORMS

UNI EN ISO 10140-2 - Laboratory measurement of sound insulation in buildings and building elements - Part 2: Measurement of acoustic insulation by air.
UNI EN ISO 717-1 - Evaluation of sound insulation in buildings and building elements - Part 1: Sound insulation by air.

3

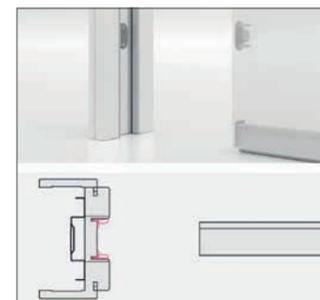

OPEN DOOR

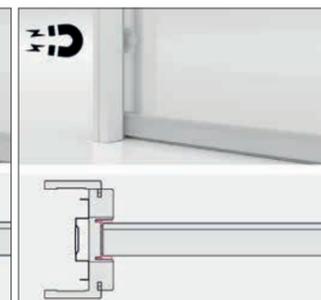

CLOSED DOOR


Magnets

Magnets are positioned on the door panel thickness and, at the same height, on the stop jamb upon which it closes. They keep the door perfectly closed, maintaining the total adhesion between the two surfaces.


COMPATIBLE SLIDING POCKET DOOR SYSTEMS

ECLISSE ACOUSTIC can be installed on both solid and stud wall versions of ECLISSE SINGLE models with finished wall thickness of 125 and 150 mm, on ECLISSE LUCE SINGLE and on ECLISSE EWOLUTO® SINGLE, also if already mounted. Compatible widths goes from 600 mm to 1000 mm, compatible heights from 2000 mm to 2400 mm.

4

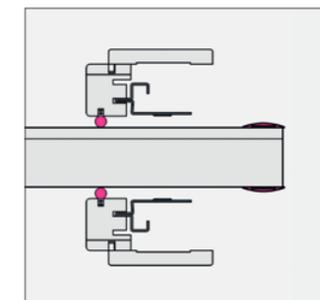

OPEN DOOR

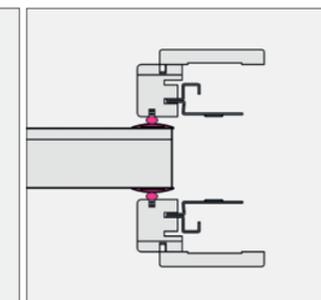

CLOSED DOOR

Acoustic gaskets and bumps

Installed on the door and the jambs, they seal the vertical interstices, closing all the draughts between the door and the jambs on the side of the pocket. They are available in black and white colours.


COMPATIBLE ACCESSORIES

ECLISSE BIAS®
ECLISSE BIAS® DS


ECLISSE ACOUSTIC

ACOUSTIC KIT - APPLICATIONS ON **SOLID WALL**


ECLISSE SINGLE - Finished wall thickness 108/125/150 mm

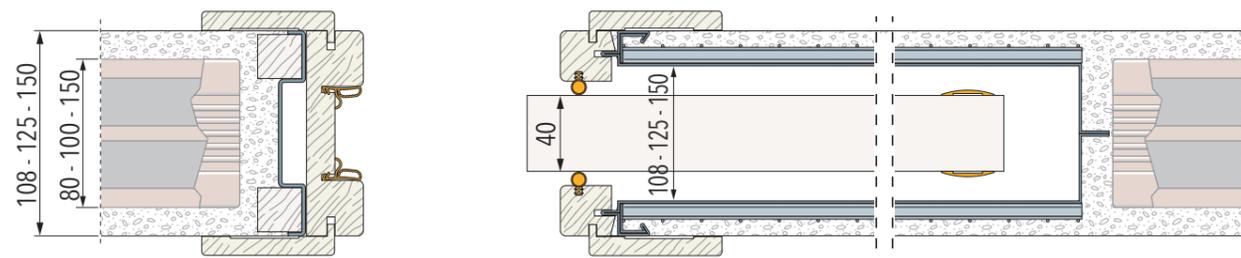

ECLISSE LUCE SINGLE - Finished wall thickness 150 mm

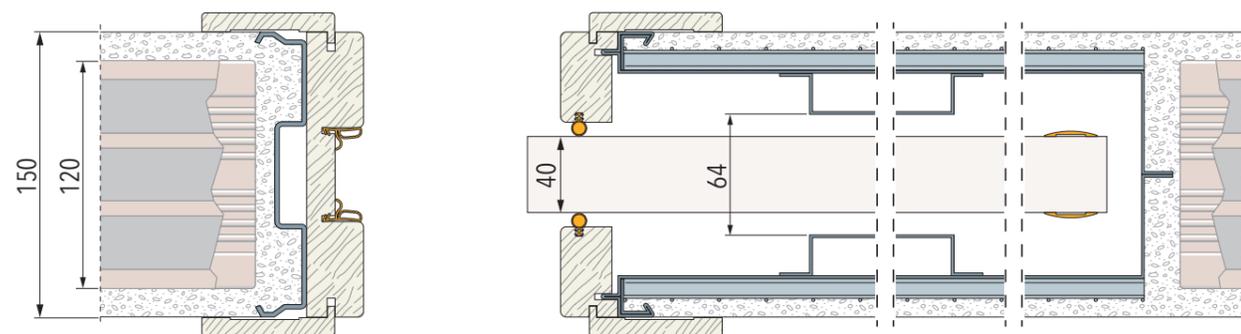


ECLISSE EWOLUTO® SINGLE - Finished wall thickness 150 mm

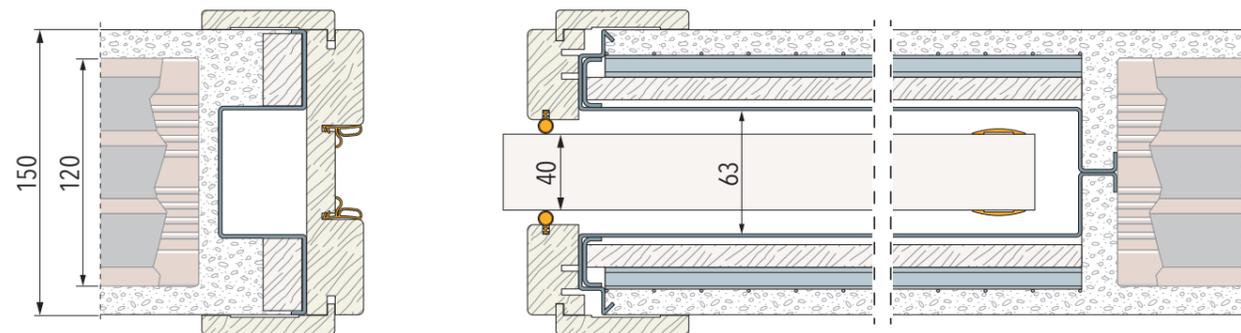


ECLISSE ACOUSTIC

ACOUSTIC KIT - APPLICATIONS ON **STUD WALL**


ECLISSE SINGLE with one plasterboard layer - Finished wall thickness 125 mm

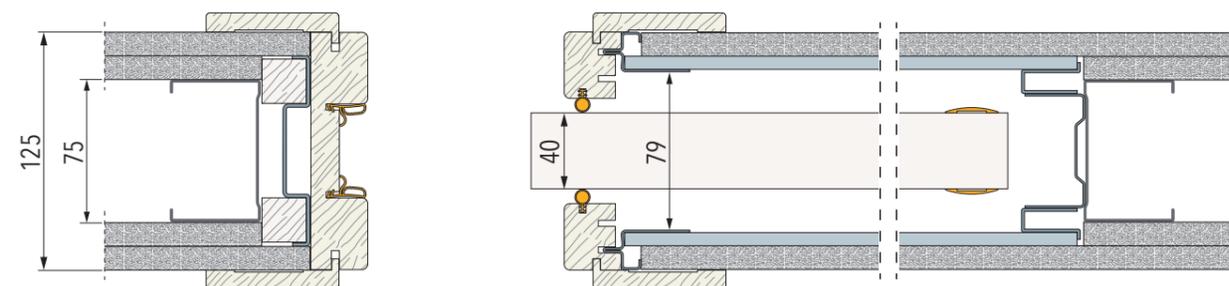


ECLISSE SINGLE with two plasterboard layers - Finished wall thickness 125 mm

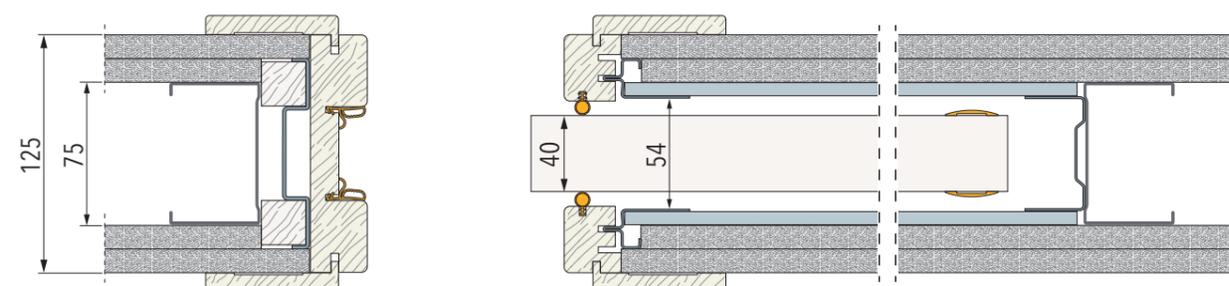

ECLISSE SINGLE with two plasterboard layers - Finished wall thickness 150 mm

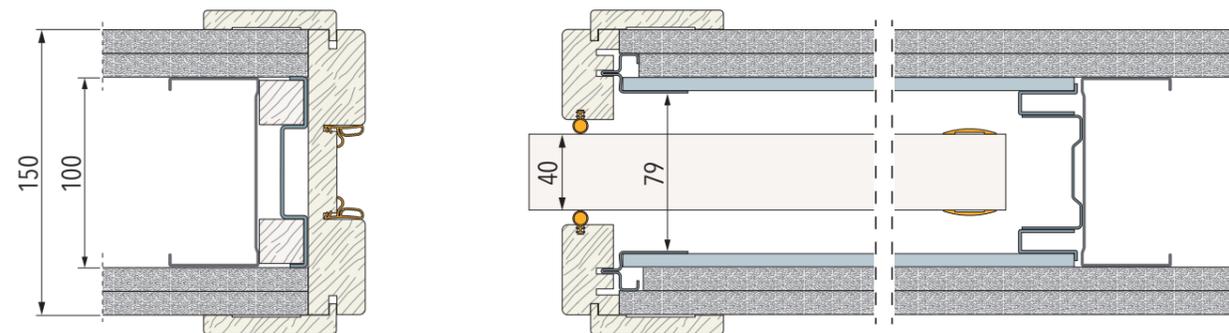

ECLISSE LUCE SINGLE with one plasterboard layer - Finished wall thickness 150 mm

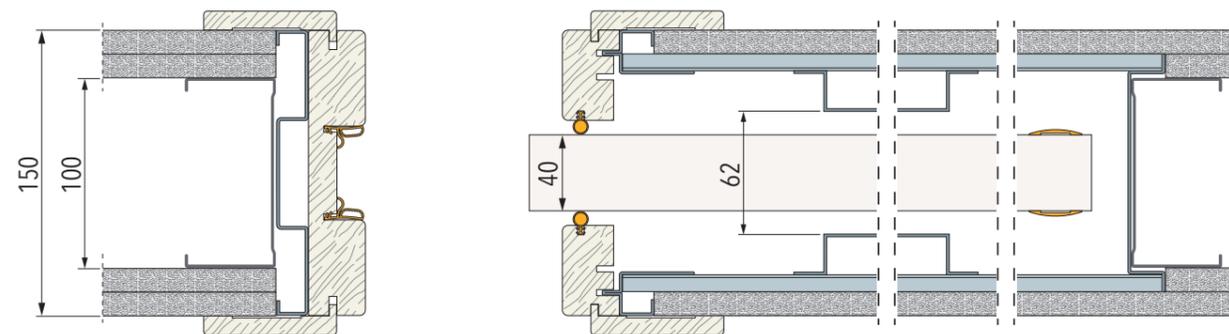

ECLISSE SYNTESIS® FLUSH COLLECTION

WITHOUT JAMBS AND ARCHITRAVES



ECLISSE
SYNTESIS® LINE SINGLE
Flush sliding pocket door system
for single door
without jambs and architraves

80



ECLISSE
SYNTESIS® LINE DOUBLE
Flush sliding pocket door system
for double door
without jambs and architraves

82



ECLISSE
SYNTESIS® LUCE SINGLE
Wiring-ready
flush sliding pocket door system
for single door
without jambs and architraves

86



ECLISSE
SYNTESIS® LUCE DOUBLE
Wiring-ready
flush sliding pocket door system
for double door
without jambs and architraves

88



ECLISSE
SYNTESIS® LINE BATTENTE
Flush-to-the-wall
single hinged door frame

94




ECLISSE
SYNTESIS® LINE BATTENTE DOUBLE
Flush-to-the-wall
double hinged door frame

97




ECLISSE
**SYNTESIS® LINE BATTENTE
with ELECTRIC STRIKE**
Flush-to-the-wall
single hinged door frame
with preparation for electric door opener

98

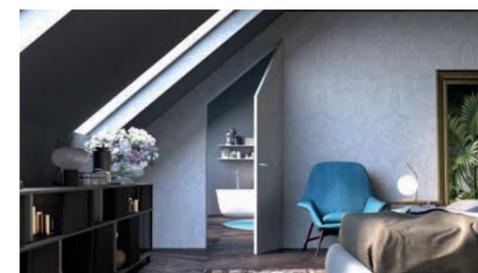


ECLISSE
**SYNTESIS® LINE BATTENTE
INCLINED**
Flush-to-the-wall
single hinged door frame
with sloping upper edge

99

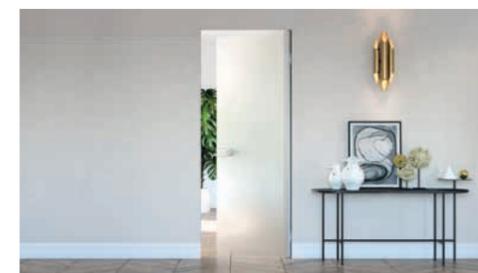


ECLISSE
SYNTESIS® BATTENTE GLASS
Flush-to-the-wall
single hinged door frame
for glass door

103

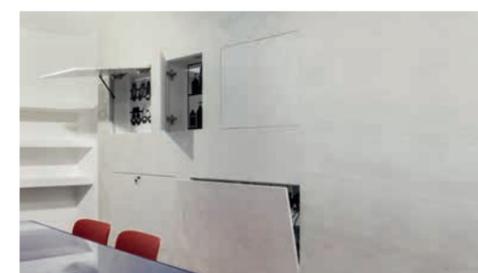

FLUSH WALL CLOSURES
Flush-to-the-wall
access panels, openings and flaps

104

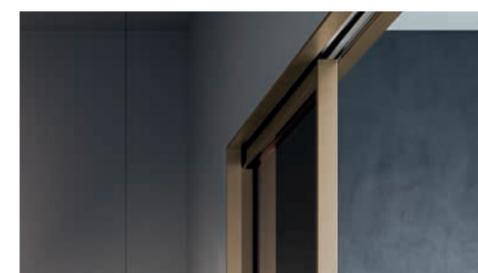

ECLISSE
MIMESI
Decorative aluminium profiles

110



ECLISSE
SYNTESIS® BASEBOARD
Flush-to-the-wall
baseboard profile

130

ECLISSE SYNTESIS® FLUSH COLLECTION

WITHOUT JAMBS AND ARCHITRAVES



1

THE SECRET IS IN THE FRAME

The new resin-coated profile needs a much thinner layer of drywall plaster along the perimeter of the doorway, reducing the drying time and therefore the installation time.

2

EXTRACTABLE TRACK

The serenity of knowing that you can extract the patented track at any time, to clean the door sliding guide, replace it with a new track or install accessories.

3

AESTHETIC DETAILS

The space between the metal header of the frame and the track is concealed on both sides by paintable seals, which not only have an aesthetic function but also allow greater tolerance in the installation of the door panel.

4

PATENTED SYSTEM WITH LIGHT SPOTS

The exclusive ECLISSE Luce system allows to install up to 10 electrical boxes (5 on each side) directly on the pocket. The wall that hosts the counterframe thus becomes available for illumination and especially switches, which are always at hand.

5

FLUSH HINGED SYSTEMS

ECLISSE frames and flush doors are ready to be finished exactly like the wall that houses them. The frame structure and raw door panel are in fact treated with primer, so they can be painted without further processing or preliminary treatment.

6

PERFECT COPLANARITY

ECLISSE flush swing doors are fitted as standard with an internal tensioning rod, a special device that can be adjusted at any time and which keeps the door panel in constant tension, preventing it from buckling and ensuring perfect flatness with the wall.

7

FLUSH BASEBOARD

ECLISSE special profile is the solution to install a baseboard flush to the wall: the wall surface is totally flat and furniture leans perfectly to the wall. It also allows to backlit your baseboard with LED stripes!


8

HIDDEN COMPARTMENTS

Flush-to-wall panels which hide wardrobes, shelving, service compartments, but also technical trap doors concealing electrical and plumbing systems. With push-pull openings, handles or key locks.

ECLISSE SYNTESIS® LINE

TECHNICAL DETAILS

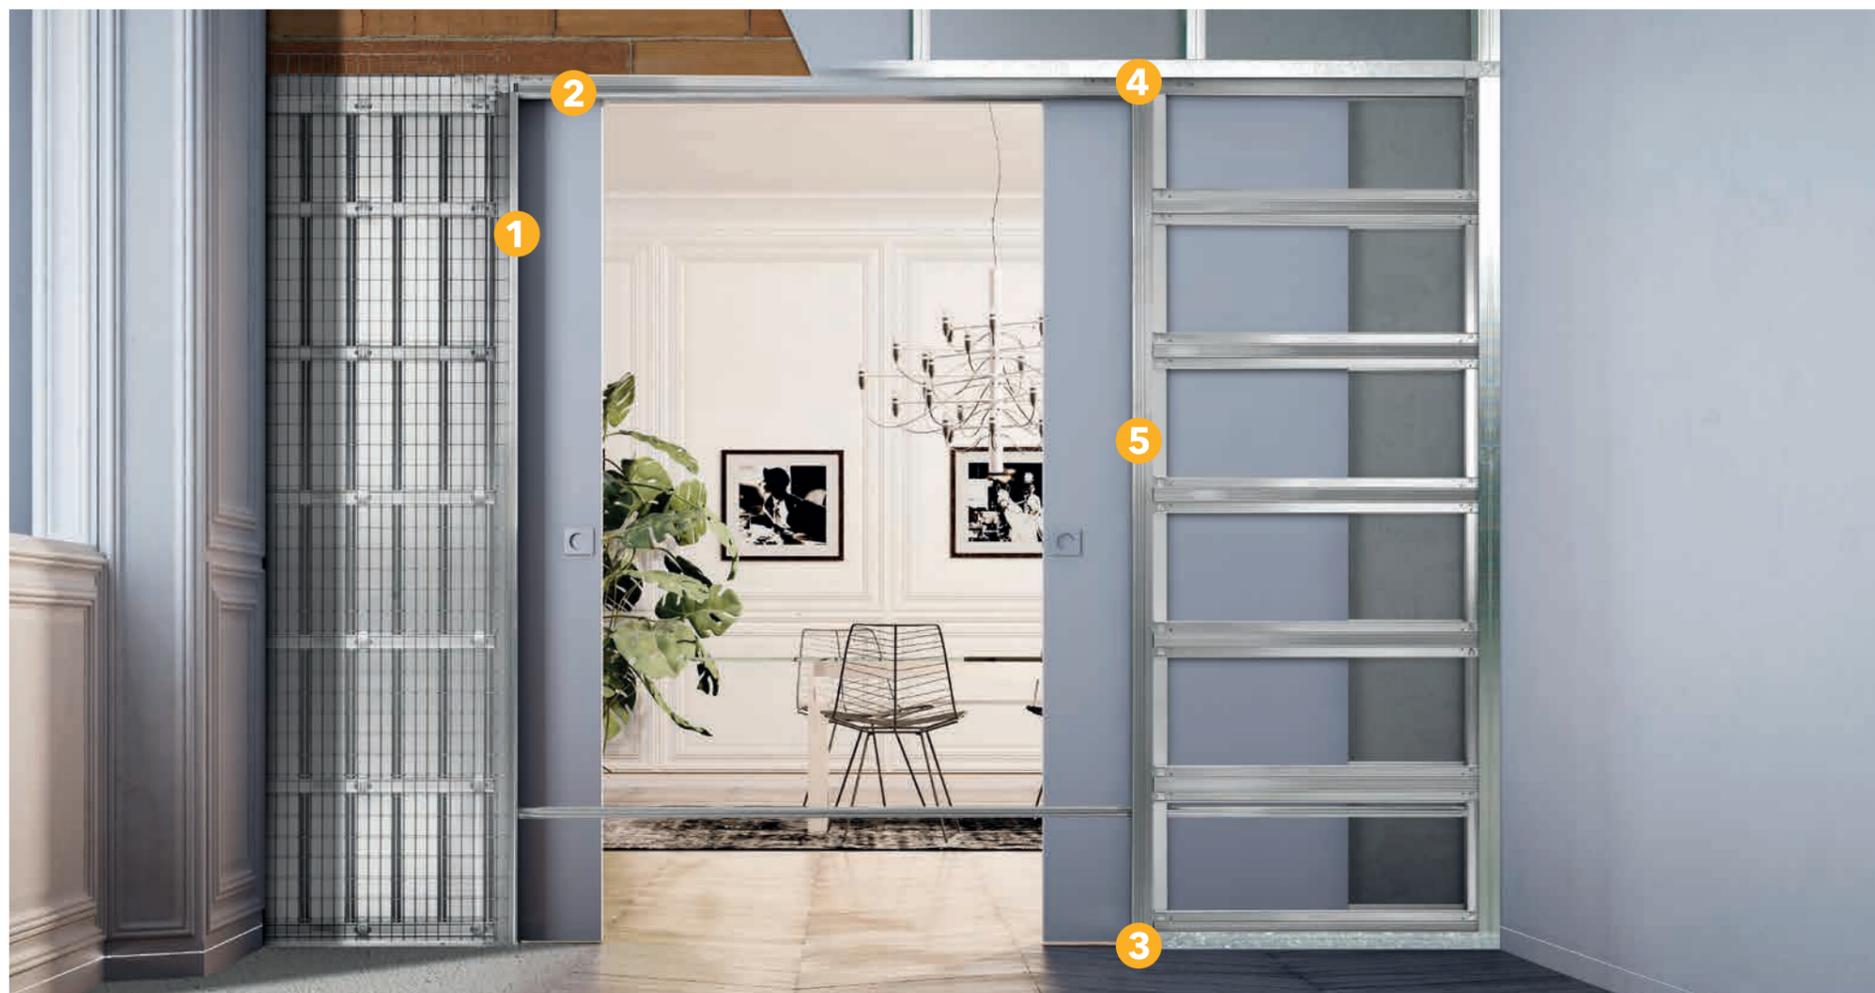


Reinforced joint
It guarantees linearity and a better linkage of track, frame and verticals.




Vertical reinforced bars
They improve the strength of the pocket door.




Reinforced edge profiles
On the single door version, pocket, track holder and doorpost have an innovative edge design that allows for a crisp plaster finish right to the edge, for a minimalist architrave free appearance. The frame is reinforced at key points to avoid strains that can cause cracks in the plaster.

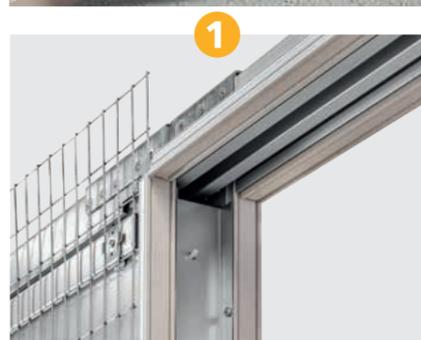

Resin-coated integrated-structure profiles
Vertical reinforced bars, top beam and the metal door stop are pre-treated with a special resin which aids the adhesion of the final finishing layer.

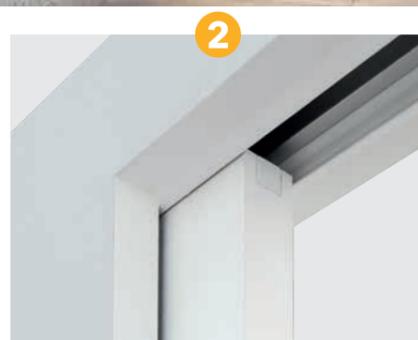

Sealing strips
The ECLISSE SYNTESIS® FLUSH pocket door systems have paintable sealing strips that close off the space between the door and the track, hiding it from view, and also allow for tolerance on little differences in height.

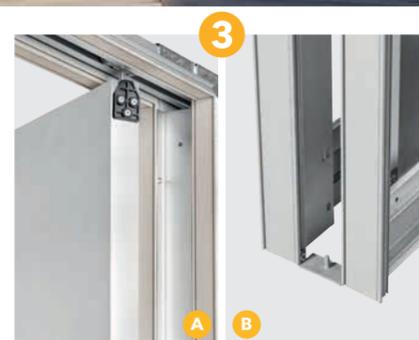


Rear bracket and self-centering door guide system (Patented)
Inserting the door panel is way easier thanks to the combination of the rear bracket (pic. A) and the self-centering door guide, which is to be screwed on the frame and does not require drilling the floor (pic. B).



ECLISSE SYNTESIS® LINE
SOLID WALL

PASSAGE SIZE
A=600÷2000 mm
H=1000÷3000 mm

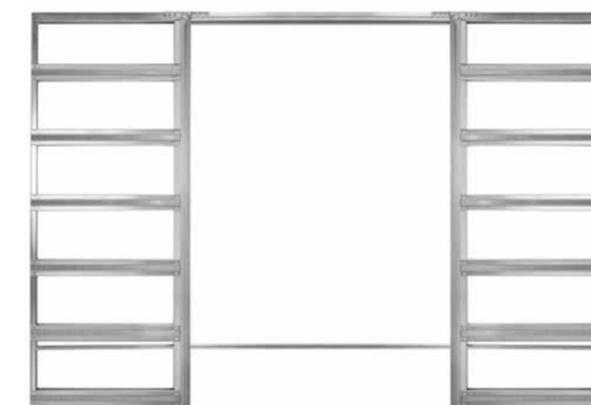


ECLISSE SYNTESIS® LINE DOUBLE
STUD WALL

PASSAGE SIZE
A=600+600 ÷2000+2000 mm
H=1000÷3000 mm

ECLISSE SYNTESIS® LINE

SOLID WALL

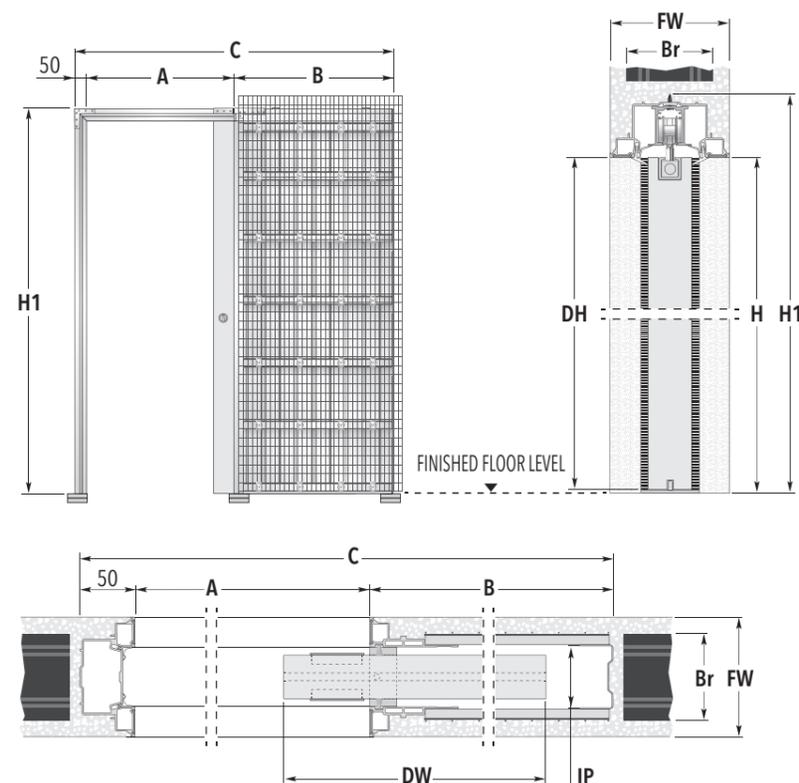


WARNING

Door panels for ECLISSE SYNTESIS® FLUSH sliding pocket door systems must be milled along the upper and lower profiles, as shown below (milling not required on glass doors).

ECLISSE SYNTESIS® LINE

STUD WALL

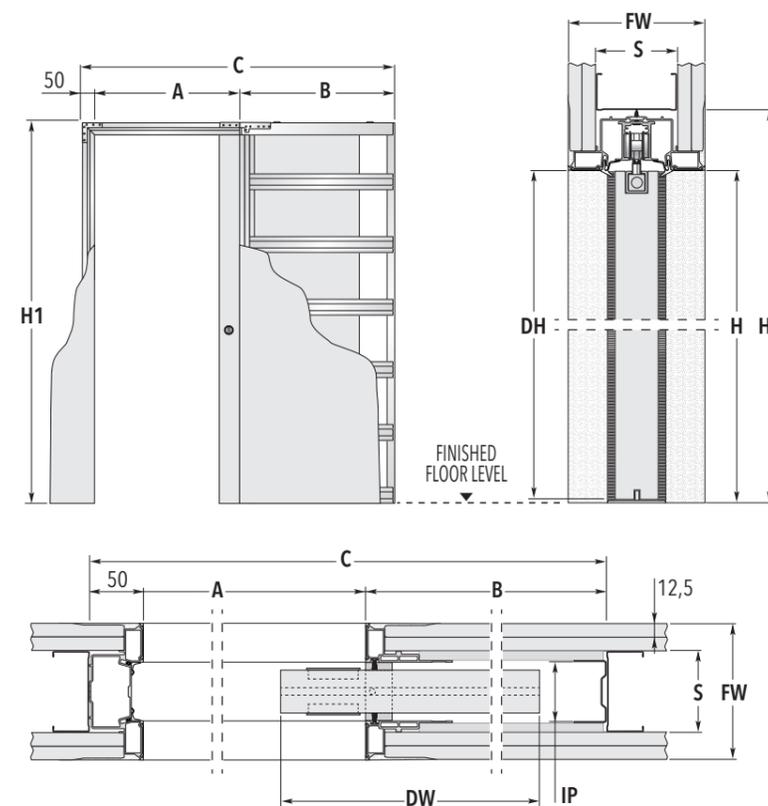

WARNING

Door panels for ECLISSE SYNTESIS® FLUSH sliding pocket door systems must be milled along the upper and lower profiles, as shown below (milling not required on glass doors).

SYSTEMS FOR SINGLE DOOR - Measures related to Italian standards, other dimensions available

PASSAGE SIZE A x H	OVERALL DIMENSIONS B	OVERALL DIMENSIONS C x H1	DOOR PANEL*	
			DW	DH
600 x 2000/2100	750	1393 x 2060/2160	615 ÷ 635	1992/2092
700 x 2000/2100	850	1593 x 2060/2160	715 ÷ 735	1992/2092
800 x 2000/2100	950	1793 x 2060/2160	815 ÷ 835	1992/2092
900 x 2000/2100	1050	1993 x 2060/2160	915 ÷ 935	1992/2092
1000 x 2000/2100	1150	2193 x 2060/2160	1015 ÷ 1035	1992/2092
FINISHED WALL = FW		BRICKS = Br	INTERNAL PASSAGE = IP	
108	→	80	54	
125	→	100	54	
150	→	120	54	

NON-STANDARD SIZES

NOTES

ACCESSORIES

▶ Passage width
FW 108: 600÷1000 mm
FW 125: 600÷1300 mm
FW 150: 600÷1300 mm

- ▶ Passage width A is reduced by 7 mm.
- ▶ For A>1000 mm only FW 125 and FW 150 are available.
- ▶ Max. door thickness 40 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg (150 kg on request).
- ▶ Due to production characteristics of the system and for safety reasons, ECLISSE recommends the door protrudes by 80 mm.
- ▶ If needed, the adjustable door stop allows to modify the real passage size.
- ▶ For the door to disappear completely, milling is required.
- ▶ The milling for the door guide must have the following dimensions: 7x15 mm.
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.

- ▶ ECLISSE BIAS®
- ▶ ECLISSE BIAS® DS
- ▶ ECLISSE PUSH&PULL S
- ▶ Anti-warp profile
- ▶ ECLISSE SYNTESIS® BASEBOARD

SYSTEMS FOR SINGLE DOOR - Measures related to Italian standards, other dimensions available

PASSAGE SIZE A x H	OVERALL DIMENSIONS B	OVERALL DIMENSIONS C x H1	DOOR PANEL*	
			DW	DH
600 x 2000/2100	750	1393 x 2060/2160	615 ÷ 635	1992/2092
700 x 2000/2100	850	1593 x 2060/2160	715 ÷ 735	1992/2092
800 x 2000/2100	950	1793 x 2060/2160	815 ÷ 835	1992/2092
900 x 2000/2100	1050	1993 x 2060/2160	915 ÷ 935	1992/2092
1000 x 2000/2100	1150	2193 x 2060/2160	1015 ÷ 1035	1992/2092
FINISHED WALL = FW		STUDWORK = S	INTERNAL PASSAGE = IP	
100	→	75 - with one plasterboard layer	54	
125	→	75 - with two plasterboard layers	54	
150	→	100 - with two plasterboard layers	54	

NON-STANDARD SIZES

NOTES

ACCESSORIES

▶ Passage width
FW 100: 600÷1000 mm
FW 125: 600÷1300 mm
FW 150: 600÷2000 mm

- ▶ Passage width A is reduced by 7 mm.
- ▶ For A>1000 mm and H>2150 mm only FW 125 and FW 150 are available.
- ▶ Max. door thickness 40 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg (150 kg on request).
- ▶ Due to production characteristics of the system and for safety reasons, ECLISSE recommends the door protrudes by 80 mm.
- ▶ If needed, the adjustable door stop allows to modify the real passage size.
- ▶ For the door to disappear completely, milling is required.
- ▶ The milling for the door guide must have the following dimensions: 7x15 mm.
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.


▶ Passage height
FW 100: 1000÷2100 mm
FW 125: 1000÷2700 mm
FW 150: 1000÷3000 mm

▶ Half sizes require bespoke door panels (e.g. A=650 mm).


- ▶ ECLISSE BIAS®
- ▶ ECLISSE BIAS® DS
- ▶ ECLISSE PUSH&PULL S
- ▶ Anti-warp profile
- ▶ ECLISSE SYNTESIS® BASEBOARD

ECLISSE SYNTESIS® LINE DOUBLE

SOLID WALL

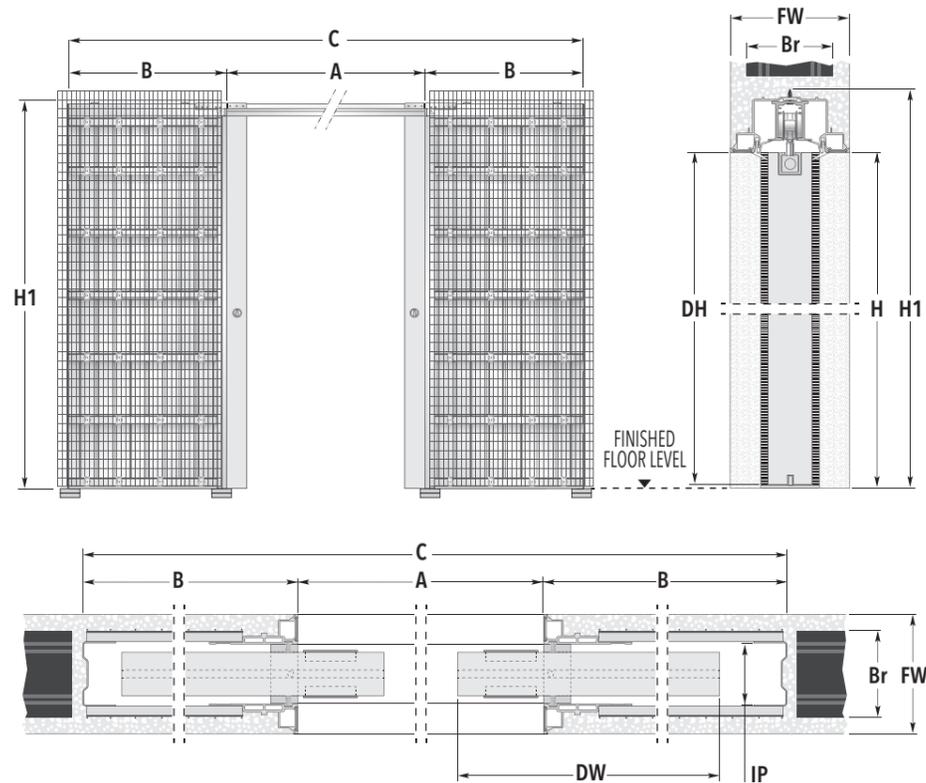


WARNING
 Door panels for ECLISSE SYNTESIS® FLUSH sliding pocket door systems must be milled along the upper and lower profiles, as shown below (milling not required on glass doors).

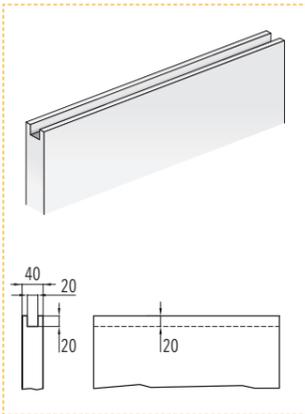


ECLISSE SYNTESIS® LINE DOUBLE

STUD WALL

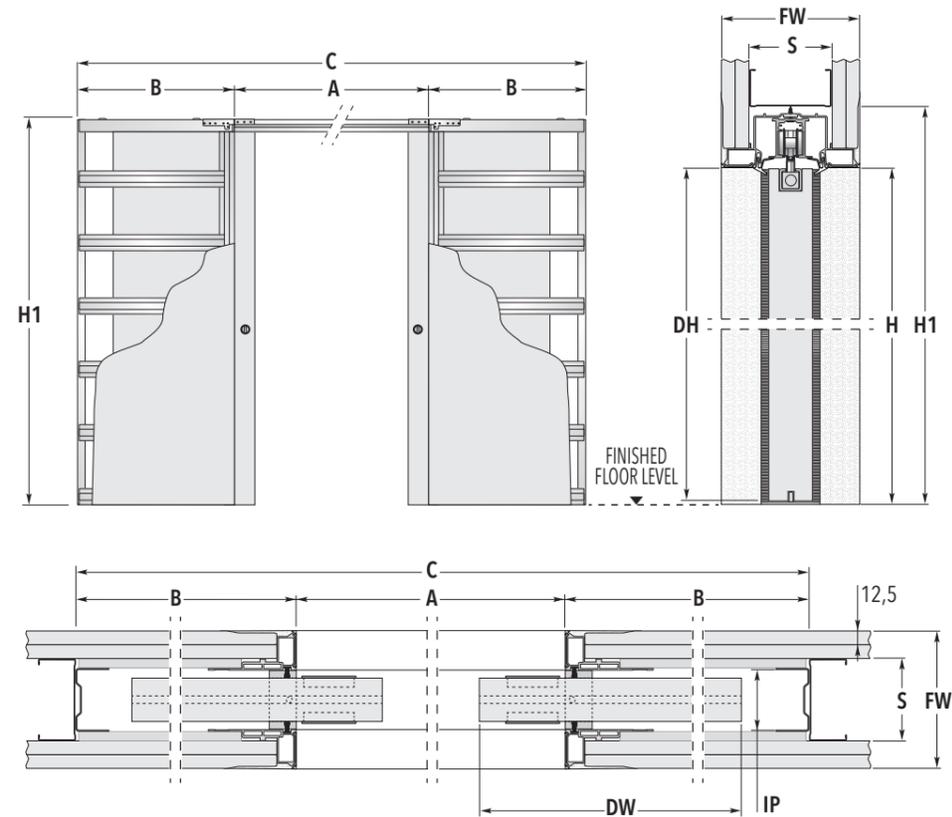

WARNING
 Door panels for ECLISSE SYNTESIS® FLUSH sliding pocket door systems must be milled along the upper and lower profiles, as shown below (milling not required on glass doors).

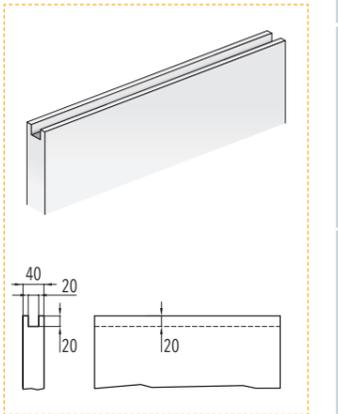

SYSTEMS FOR DOUBLE DOOR - Measures related to Italian standards, other dimensions available

PASSAGE SIZE A x H	OVERALL DIMENSIONS B C x H1	DOOR PANEL* DW DH
1200 x 2000/2100	750 2686 x 2060/2160	615 ÷ 635 1992/2092
1400 x 2000/2100	850 3086 x 2060/2160	715 ÷ 735 1992/2092
1600 x 2000/2100	950 3486 x 2060/2160	815 ÷ 835 1992/2092
1800 x 2000/2100	1050 3886 x 2060/2160	915 ÷ 935 1992/2092
2000 x 2000/2100	1150 4286 x 2060/2160	1015 ÷ 1035 1992/2092
FINISHED WALL = FW	BRICKS = Br	INTERNAL PASSAGE = IP
108 →	80	54
125 →	100	54
150 →	120	54

NON-STANDARD SIZES

- ▶ Passage width
 FW 108: 600+600÷1000+1000 mm
 FW 125: 600+600÷1300+1300 mm
 FW 150: 600+600÷1300+1300 mm
- ▶ Passage height
 FW 108: 1000+2600 mm
 FW 125: 1000+2700 mm
 FW 150: 1000+2700 mm
- ▶ Half sizes require bespoke door panels (e.g. A=1300 mm).

NOTES

- ▶ Passage width A is reduced by 14 mm.
- ▶ For A>2000 mm only FW 125 and FW 150 are available.
- ▶ Max. door thickness 40 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg (150 kg on request).
- ▶ Due to production characteristics of the system and for safety reasons, ECLISSE recommends the door protrudes by 80 mm.
- ▶ If needed, the adjustable door stop allows to modify the real passage size.
- ▶ For the door to disappear completely, milling is required.
- ▶ The milling for the door guide must have the following dimensions: 7x15 mm.
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.

ACCESSORIES

- ▶ Double door co-ordination for SYNTESIS® FLUSH
- ▶ ECLISSE BIAS®
- ▶ ECLISSE BIAS® DS
- ▶ ECLISSE PUSH&PULL S
- ▶ Anti-warp profile
- ▶ ECLISSE SYNTESIS® BASEBOARD

SYSTEMS FOR DOUBLE DOOR - Measures related to Italian standards, other dimensions available

PASSAGE SIZE A x H	OVERALL DIMENSIONS B C x H1	DOOR PANEL* DW DH
1200 x 2000/2100	750 2686 x 2060/2160	615 ÷ 635 1992/2092
1400 x 2000/2100	850 3086 x 2060/2160	715 ÷ 735 1992/2092
1600 x 2000/2100	950 3486 x 2060/2160	815 ÷ 835 1992/2092
1800 x 2000/2100	1050 3886 x 2060/2160	915 ÷ 935 1992/2092
2000 x 2000/2100	1150 4286 x 2060/2160	1015 ÷ 1035 1992/2092
FINISHED WALL = FW	STUDWORK = S	INTERNAL PASSAGE = IP
100 →	75 - with one plasterboard layer	54
125 →	75 - with two plasterboard layers	54
150 →	100 - with two plasterboard layers	54

NON-STANDARD SIZES

- ▶ Passage width
 FW 100: 600+600÷1000+1000 mm
 FW 125: 600+600÷1300+1300 mm
 FW 150: 600+600÷2000+2000 mm
- ▶ Passage height
 FW 100: 1000+2100 mm
 FW 125: 1000+2700 mm
 FW 150: 1000+3000 mm
- ▶ Half sizes require bespoke door panels (e.g. A=1300 mm).

NOTES

- ▶ Passage width A is reduced by 14 mm.
- ▶ For A>2000 mm and H>2150 mm only FW 125 and FW 150 are available.
- ▶ Max. door thickness 40 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg (150 kg on request).
- ▶ Due to production characteristics of the system and for safety reasons, ECLISSE recommends the door protrudes by 80 mm.
- ▶ If needed, the adjustable door stop allows to modify the real passage size.
- ▶ For the door to disappear completely, milling is required.
- ▶ The milling for the door guide must have the following dimensions: 7x15 mm.
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.


ACCESSORIES

- ▶ Double door co-ordination for SYNTESIS® FLUSH
- ▶ ECLISSE BIAS®
- ▶ ECLISSE BIAS® DS
- ▶ ECLISSE PUSH&PULL S
- ▶ Anti-warp profile
- ▶ ECLISSE SYNTESIS® BASEBOARD

ECLISSE SYNTESIS® LUCE


TECHNICAL DETAILS

ECLISSE SYNTESIS® LUCE brings new performances, combining aesthetic with handiness: the neatness of design makes it perfect for any architectural need, and the pocket frame can be fitted with wiring conduits, such as light points, switches and sockets.

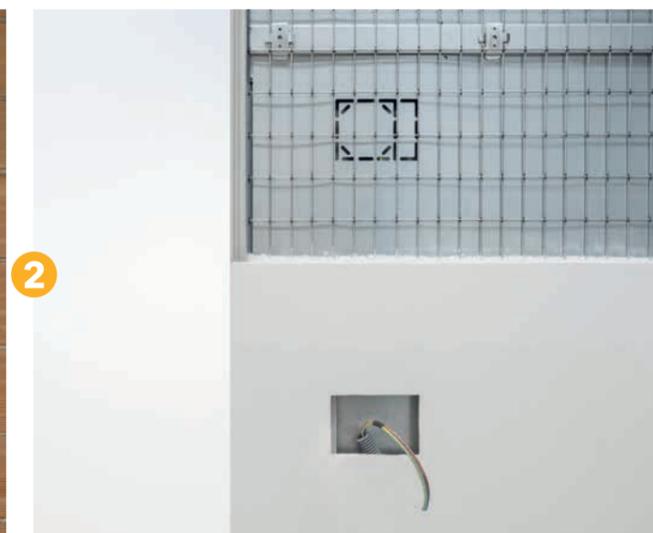


Patented technology
ECLISSE Luce patented technology fits out with dimmer controls, switches and sockets into the wall hosting the counterframe: it's perfect to keep light points at hand, right next to the door passage.

Electrical boxes
Electrical boxes supplied by ECLISSE have a reduced specific depth of 40 mm.




Resin-coated integrated-structure profiles
Special constructive details such as the resin-coated integrated-structure profiles (vertical reinforced bars, top beam and metal door stop) allow the wall to look extremely homogeneous while completely concealing the door.

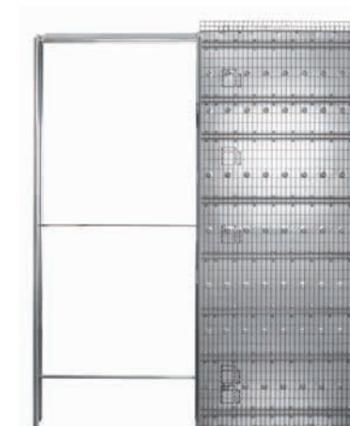

ECLISSE SYNTESIS® LUCE SINGLE
SOLID WALL

PASSAGE SIZE
A=600÷1300 mm
H=1000÷2700 mm

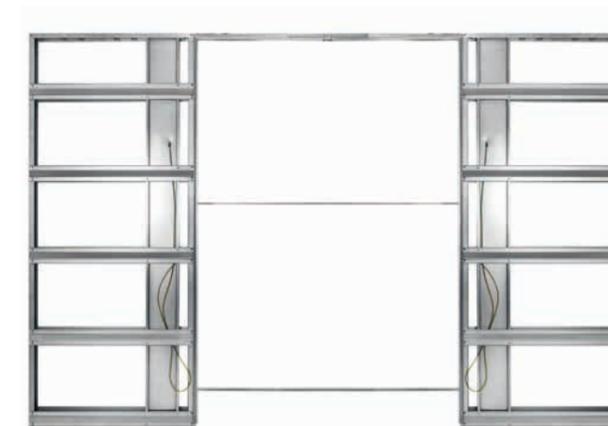


ECLISSE SYNTESIS® LUCE DOUBLE
STUD WALL

PASSAGE SIZE
A=600+600÷1300+1300 mm
H=1000÷2700 mm

ECLISSE SYNTESIS® LUCE SINGLE

SOLID WALL

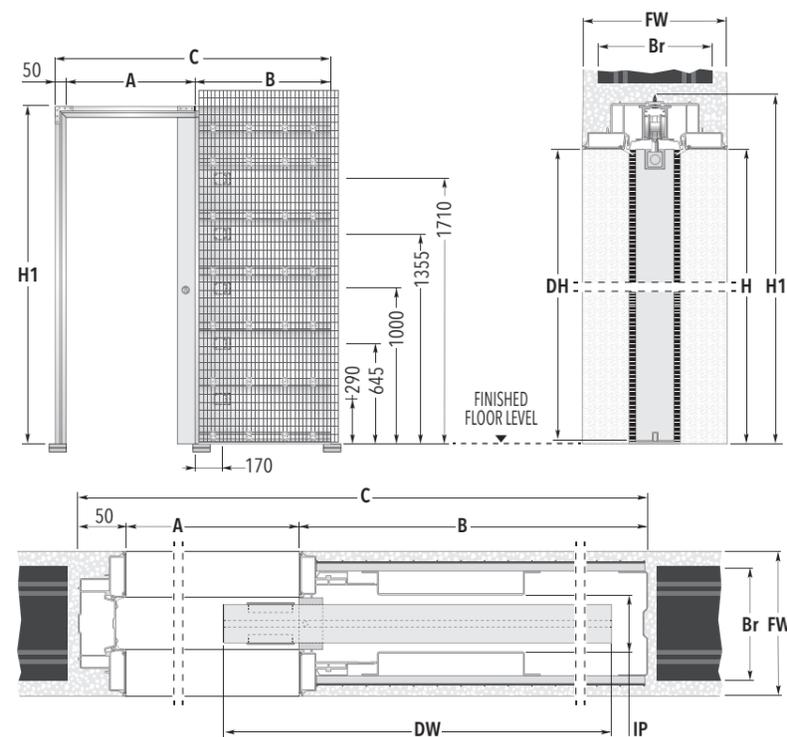


WARNING

Door panels for ECLISSE SYNTESIS® FLUSH sliding pocket door systems must be milled along the upper and lower profiles, as shown below (milling not required on glass doors).

ECLISSE SYNTESIS® LUCE SINGLE

STUD WALL

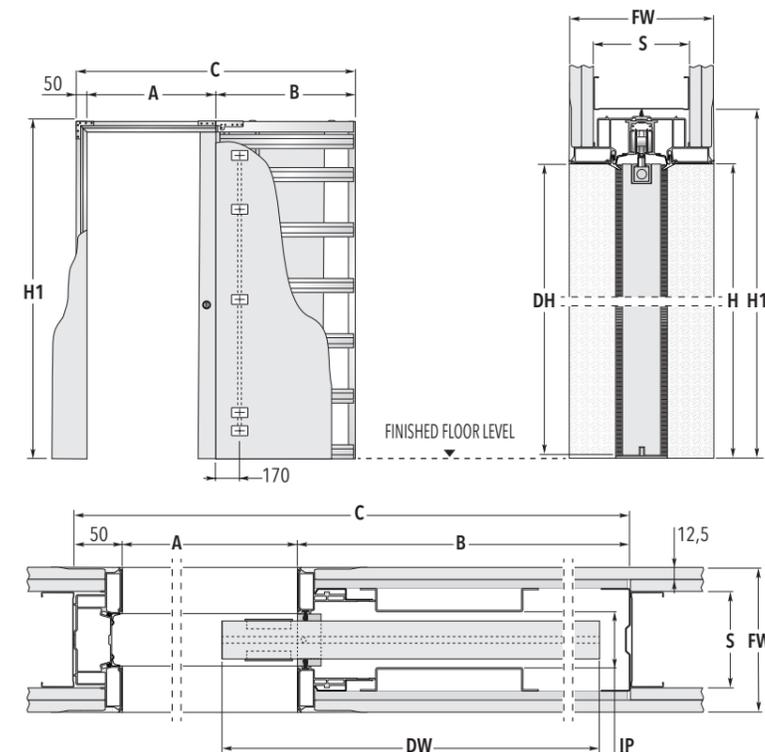

WARNING

Door panels for ECLISSE SYNTESIS® FLUSH sliding pocket door systems must be milled along the upper and lower profiles, as shown below (milling not required on glass doors).

SYSTEMS FOR SINGLE DOOR - Measures related to Italian standards, other dimensions available

PASSAGE SIZE A x H	OVERALL DIMENSIONS		DOOR PANEL*	
	B	C x H1	DW	DH
600 x 2000/2100	750	1393 x 2060/2160	615 ÷ 635	1992/2092
700 x 2000/2100	850	1593 x 2060/2160	715 ÷ 735	1992/2092
800 x 2000/2100	950	1793 x 2060/2160	815 ÷ 835	1992/2092
900 x 2000/2100	1050	1993 x 2060/2160	915 ÷ 935	1992/2092
1000 x 2000/2100	1150	2193 x 2060/2160	1015 ÷ 1035	1992/2092
FINISHED WALL = FW		BRICKS = Br	INTERNAL PASSAGE = IP	
150		→ 120	54	

SYSTEMS FOR SINGLE DOOR - Measures related to Italian standards, other dimensions available

PASSAGE SIZE A x H	OVERALL DIMENSIONS		DOOR PANEL*	
	B	C x H1	DW	DH
600 x 2000/2100	750	1393 x 2060/2160	615 ÷ 635	1992/2092
700 x 2000/2100	850	1593 x 2060/2160	715 ÷ 735	1992/2092
800 x 2000/2100	950	1793 x 2060/2160	815 ÷ 835	1992/2092
900 x 2000/2100	1050	1993 x 2060/2160	915 ÷ 935	1992/2092
1000 x 2000/2100	1150	2193 x 2060/2160	1015 ÷ 1035	1992/2092
FINISHED WALL = FW		STUDWORK = S	INTERNAL PASSAGE = IP	
150		→ 100 one layer on each side of the pocket two layers on each side of the studwork	54	

NON-STANDARD SIZES

- ▶ Passage width 600÷1300 mm
- ▶ Passage height 1000÷2700 mm
- ▶ Half sizes require bespoke door panels (e.g. A=650 mm).

NOTES

- ▶ Passage width A is reduced by 7 mm.
- ▶ For electrical boxes, only standard positions are possible.
- ▶ Arrangements for electrical boxes are provided as standard on both sides of each pocket.
- ▶ Max. electrical box depth 40 mm (2 boxes are supplied).
- ▶ Max. door thickness 40 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg (150 kg on request).
- ▶ Due to production characteristics of the system and for safety reasons, ECLISSE recommends the door protrudes by 80 mm.
- ▶ If needed, the adjustable door stop allows to modify the real passage size.
- ▶ For the door to disappear completely, milling is required.
- ▶ The milling for the door guide must have the following dimensions: 7x15 mm.
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.

ACCESSORIES

- ▶ ECLISSE BIAS®
- ▶ ECLISSE BIAS® DS
- ▶ ECLISSE PUSH&PULL S
- ▶ Anti-warp profile
- ▶ ECLISSE SYNTESIS® BASEBOARD

NON-STANDARD SIZES

- ▶ Passage width 600÷1300 mm
- ▶ Passage height 1000÷2700 mm
- ▶ Half sizes require bespoke door panels (e.g. A=650 mm).

NOTES


- ▶ Passage width A is reduced by 7 mm.
- ▶ Arrangements for electrical boxes are provided as standard on both sides of each pocket.
- ▶ Max. electrical box depth 40 mm (2 boxes are supplied).
- ▶ Max. door thickness 40 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg (150 kg on request).
- ▶ Due to production characteristics of the system and for safety reasons, ECLISSE recommends the door protrudes by 80 mm.
- ▶ If needed, the adjustable door stop allows to modify the real passage size.
- ▶ For the door to disappear completely, milling is required.
- ▶ The milling for the door guide must have the following dimensions: 7x15 mm.
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.

ACCESSORIES

- ▶ ECLISSE BIAS®
- ▶ ECLISSE BIAS® DS
- ▶ ECLISSE PUSH&PULL S
- ▶ Anti-warp profile
- ▶ ECLISSE SYNTESIS® BASEBOARD

ECLISSE SYNTESIS® LUCE DOUBLE

SOLID WALL

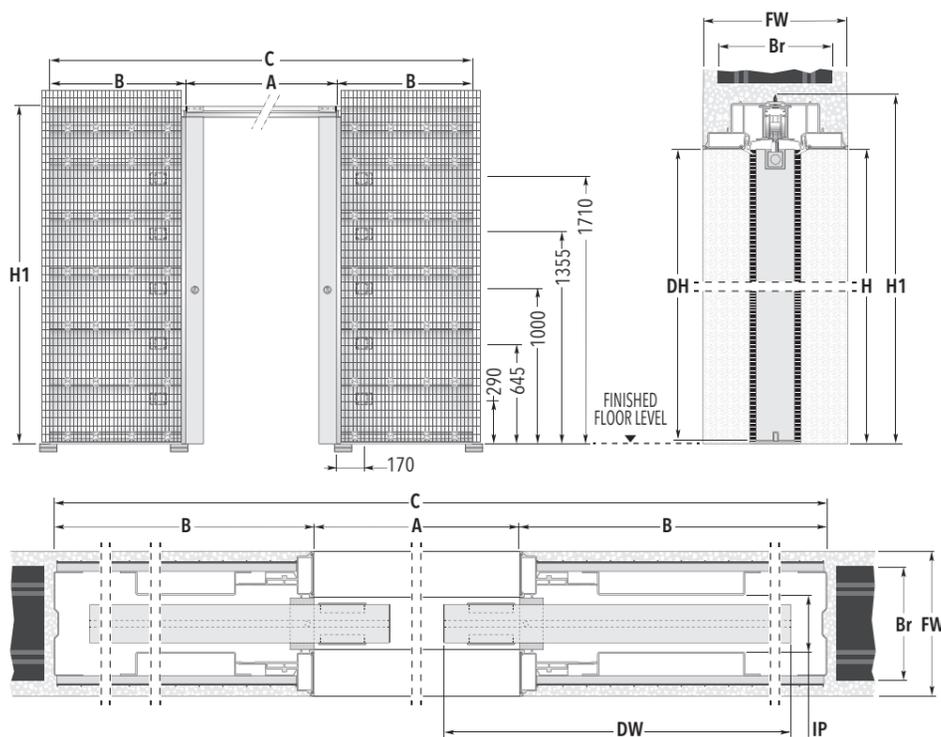


WARNING

Door panels for ECLISSE SYNTESIS® FLUSH sliding pocket door systems must be milled along the upper and lower profiles, as shown below (milling not required on glass doors).

ECLISSE SYNTESIS® LUCE DOUBLE

STUD WALL

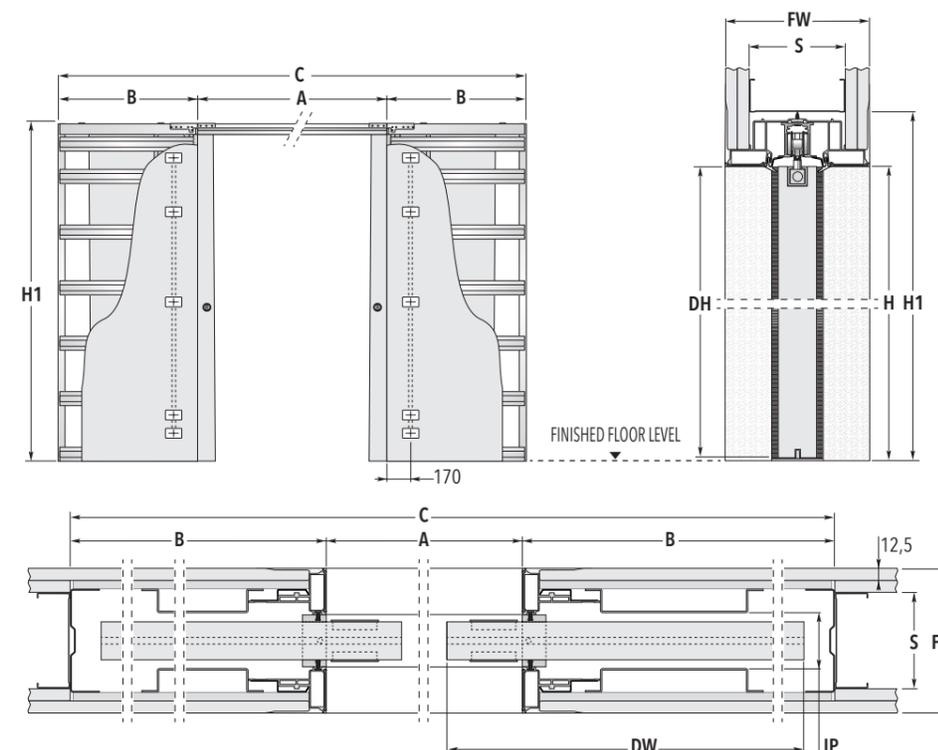

WARNING

Door panels for ECLISSE SYNTESIS® FLUSH sliding pocket door systems must be milled along the upper and lower profiles, as shown below (milling not required on glass doors).

SYSTEMS FOR DOUBLE DOOR - Measures related to Italian standards, other dimensions available

PASSAGE SIZE A x H	OVERALL DIMENSIONS		DOOR PANEL*	
	B	C x H1	DW	DH
1200 x 2000/2100	750	2686 x 2060/2160	615 ÷ 635	1992/2092
1400 x 2000/2100	850	3086 x 2060/2160	715 ÷ 735	1992/2092
1600 x 2000/2100	950	3486 x 2060/2160	815 ÷ 835	1992/2092
1800 x 2000/2100	1050	3886 x 2060/2160	915 ÷ 935	1992/2092
2000 x 2000/2100	1150	4286 x 2060/2160	1015 ÷ 1035	1992/2092
FINISHED WALL = FW		BRICKS = Br	INTERNAL PASSAGE = IP	
150		120	54	

SYSTEMS FOR DOUBLE DOOR - Measures related to Italian standards, other dimensions available

PASSAGE SIZE A x H	OVERALL DIMENSIONS		DOOR PANEL*	
	B	C x H1	DW	DH
1200 x 2000/2100	750	2686 x 2060/2160	615 ÷ 635	1992/2092
1400 x 2000/2100	850	3086 x 2060/2160	715 ÷ 735	1992/2092
1600 x 2000/2100	950	3486 x 2060/2160	815 ÷ 835	1992/2092
1800 x 2000/2100	1050	3886 x 2060/2160	915 ÷ 935	1992/2092
2000 x 2000/2100	1150	4286 x 2060/2160	1015 ÷ 1035	1992/2092
FINISHED WALL = FW		STUDWORK = S	INTERNAL PASSAGE = IP	
150		100 one layer on each side of the pocket two layers on each side of the studwork	54	

NON-STANDARD SIZES

- ▶ Passage width 600+600÷1300+1300 mm.
- ▶ Passage height 1000÷2700 mm.
- ▶ Half sizes require bespoke door panels (e.g. A=1300 mm).

NOTES

- ▶ Passage width A is reduced by 14 mm.
- ▶ For electrical boxes, only standard positions are possible.
- ▶ Arrangements for electrical boxes are provided as standard on both sides of each pocket.
- ▶ Max. electrical box depth 40 mm (4 boxes are supplied).
- ▶ Max. door thickness 40 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg (150 kg on request).
- ▶ Due to production characteristics of the system and for safety reasons, ECLISSE recommends the door protrudes by 80 mm.
- ▶ If needed, the adjustable door stop allows to modify the real passage size.
- ▶ For the door to disappear completely, milling is required.
- ▶ The milling for the door guide must have the following dimensions: 7x15 mm.
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.

ACCESSORIES

- ▶ Double door co-ordination for SYNTESIS® FLUSH
- ▶ ECLISSE BIAS®
- ▶ ECLISSE BIAS® DS
- ▶ ECLISSE PUSH&PULL S
- ▶ Anti-warp profile
- ▶ ECLISSE SYNTESIS® BASEBOARD

NON-STANDARD SIZES

- ▶ Passage width 600+600÷1300+1300 mm.
- ▶ Passage height 1000÷2700 mm.
- ▶ Half sizes require bespoke door panels (e.g. A=1300 mm).

NOTES

- ▶ Passage width A is reduced by 14 mm.
- ▶ Arrangements for electrical boxes are provided as standard on both sides of each pocket.
- ▶ Max. electrical box depth 40 mm (4 boxes are supplied).
- ▶ Max. door thickness 40 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg (150 kg on request).
- ▶ Due to production characteristics of the system and for safety reasons, ECLISSE recommends the door protrudes by 80 mm.
- ▶ If needed, the adjustable door stop allows to modify the real passage size.
- ▶ For the door to disappear completely, milling is required.
- ▶ The milling for the door guide must have the following dimensions: 7x15 mm.
- ▶ Install at finished floor level.
- * Listed measures refers to wooden door panels only.

ACCESSORIES

- ▶ Double door co-ordination for SYNTESIS® FLUSH
- ▶ ECLISSE BIAS®
- ▶ ECLISSE BIAS® DS
- ▶ ECLISSE PUSH&PULL S
- ▶ Anti-warp profile
- ▶ ECLISSE SYNTESIS® BASEBOARD

ECLISSE SYNTESIS® LINE BATTENTE

TECHNICAL DETAILS - THE FRAME

Long lasting and paintable

The aluminium frame is firstly subjected to an anodization treatment against oxidation and then primer-coated to facilitate paint adhesion.

6 adjustable clamps

The clamps are adjustable in height and prepared to be easily fixed to brick walls.

100 height mark

To help the installer find the correct floor height.

ECLISSE badge

The frame is recognisable by the ECLISSE trademark.



- Spacer panel in OSB 3 (25 mm thickness) provided as standard to guarantee a perfect squaring and installation of the frame.
- Provided with plastic covering to prevent scratches and damages during handling and installation phases.
- Bar code for product identification.
- Stable, easy to install and soft gaskets. They are to be applied on the frame and not on the door panel.
- Hinges covering protections from plaster (on pull version).



ECLISSE SYNTESIS® LINE BATTENTE
SOLID WALL - STUD WALL

PASSAGE SIZE
L=600÷1000 mm
H=1650÷3000 mm

PASSAGE SIZE
L=600+600÷1000+1000 mm
H=1650÷3000 mm

ECLISSE SYNTESIS® LINE BATTENTE

TECHNICAL DETAILS - THE DOOR

Door

Hollow core with double solid wood frame to increase rigidity while reducing weight.




Tensioning rod

Special adjustable device, it helps keep the door panel in constant tension, improving the door flatness and guaranteeing coplanarity with the wall.

Hinges

3 adjustable hinges (in height, width and depth) for a perfect calibration of the slightest perimeter spacing.

Note: for door weighing more than 50 kg (max. 65 kg) 4 hinges are needed.

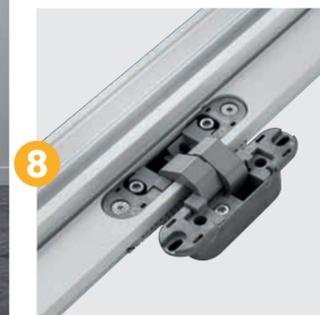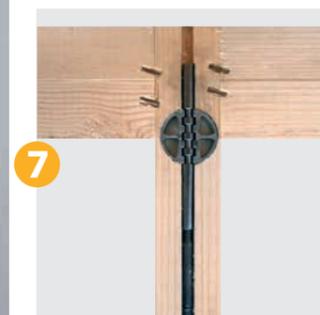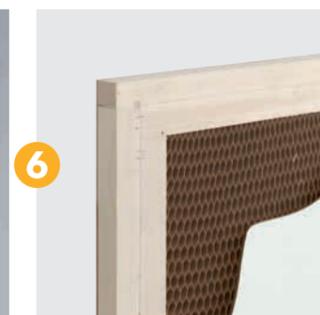

The magnetic lock

Modern design and minimal lines: it stays flush to the plate and guarantees an extraordinary softness while closing.

The eccentric strike plate


- Minimal design, it also remains flush to the frame.
- Eccentric: it allows little installation imperfections to be fixed, always ensuring a perfect locking.

Note: it comes as standard without lock or with key lock.


- The door is recognisable by the ECLISSE badge.
- Primer-coated, to increase and improve the cohesion of mural painting or lacquering (matt or glossy).
- 45 mm thickness.
- Double wooden perimeter structure to improve strength.
- Edge banding along the entire perimeter.
- Tensioning rod is standard starting from H = 2000 mm.
- Standard door panel setted for handles only; key or thumb turn lock settings are available upon request.

ECLISSE SYNTESIS® LINE BATTENTE

OPENINGS - SET - HARDWARE

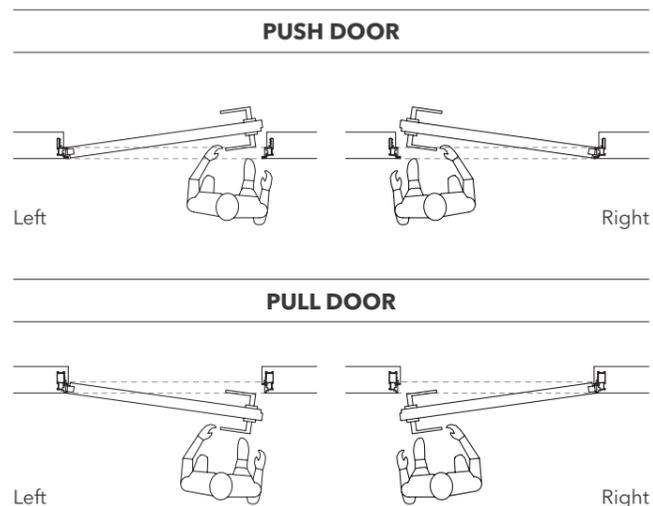

The distinctive feature of ECLISSE SYNTESIS® LINE BATTENTE is the possibility to install the doors flush with the ceiling, thanks to the option with no header, in order to achieve a total integration between door, wall and ceiling.

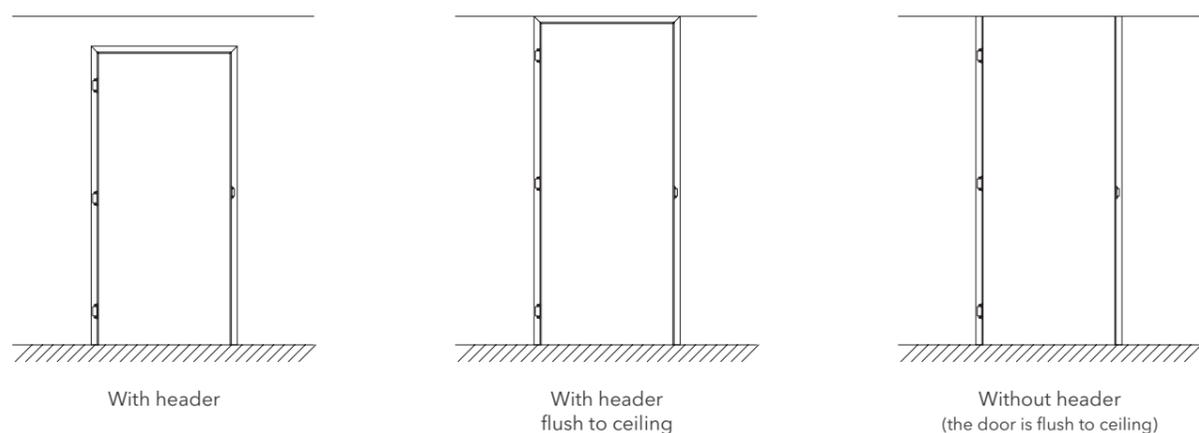

SUPPLY METHODS




COMPLETE KIT
The complete KIT includes:
FRAME STRUCTURE + PRIMER-COATED DOOR
+ HARDWARE

SINGLE ELEMENTS
FRAME STRUCTURE
PRIMER-COATED DOOR
HARDWARE


ECLISSE SYNTESIS® LINE BATTENTE

APPLICATIONS


The frame fits both stud and solid wall.
For solid wall 6 clamps are cemented in the special spaces created in the wall.
For stud wall the frame is fixed with screws to the wood or metal structure through the existing holes.

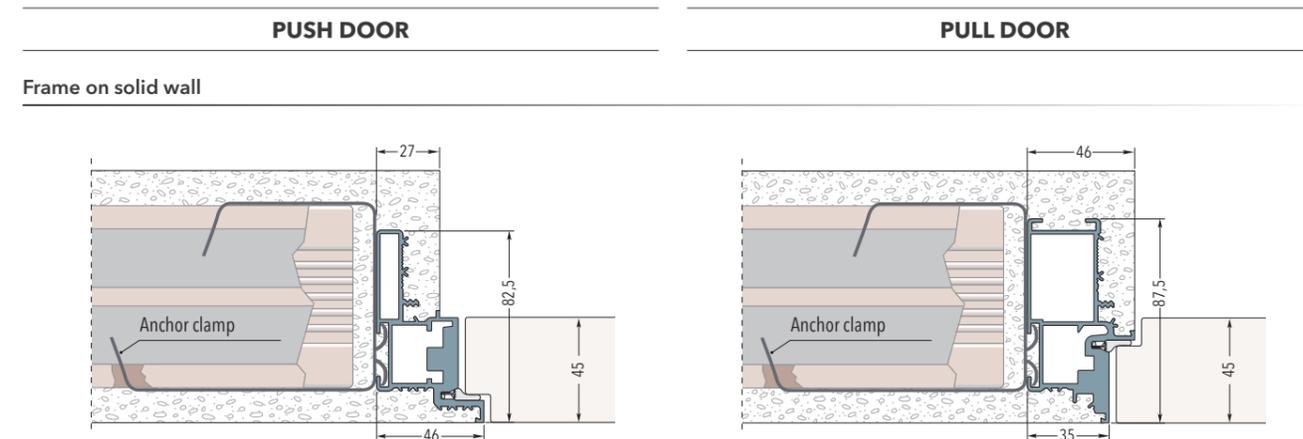


Frame on stud wall with one plasterboard layer - Finished wall thickness 100 mm

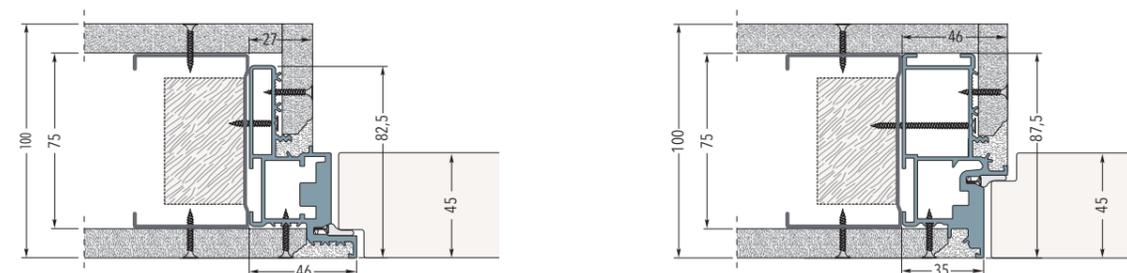

Frame on stud wall with two plasterboard layers - Finished wall thickness 100 mm

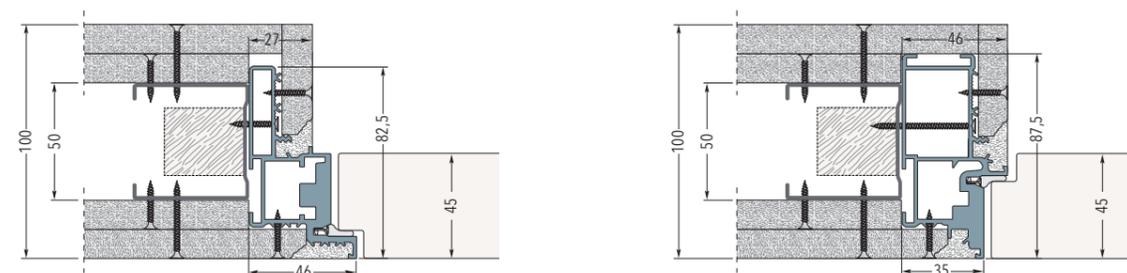

Frame on stud wall with two plasterboard layers - Finished wall thickness 125/150 mm

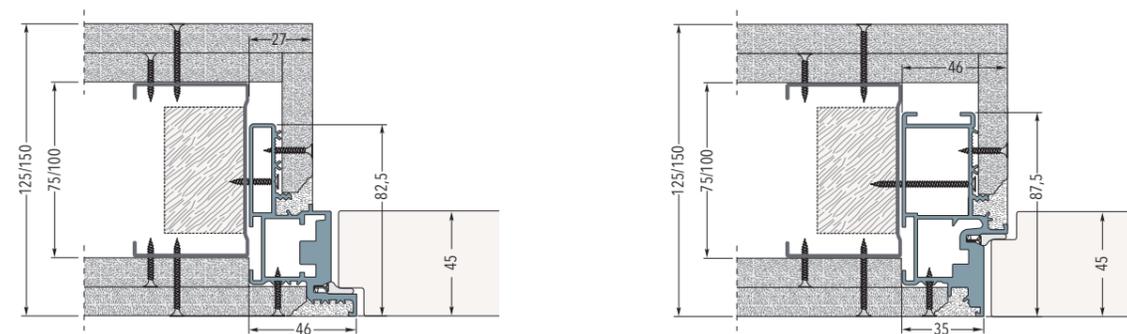




Dimensions are given in mm

ECLISSE CATALOGUE - 93




ECLISSE SYNTESIS® LINE BATTENTE

SIZES - FRAME WITH OR WITHOUT HEADER

PUSH DOOR

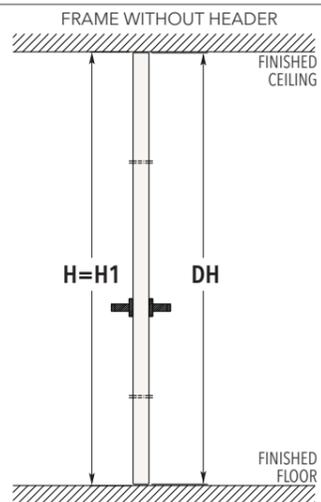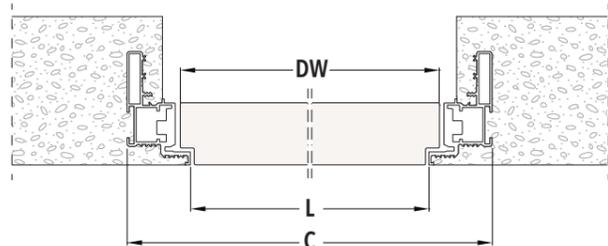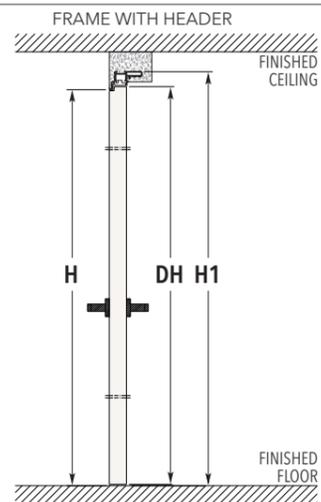

PULL DOOR

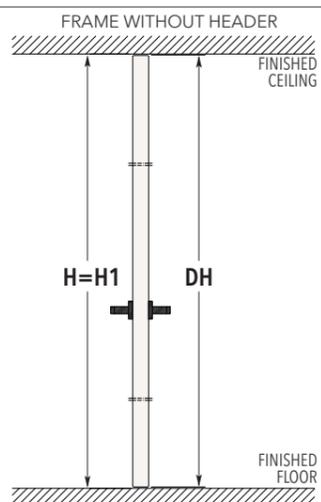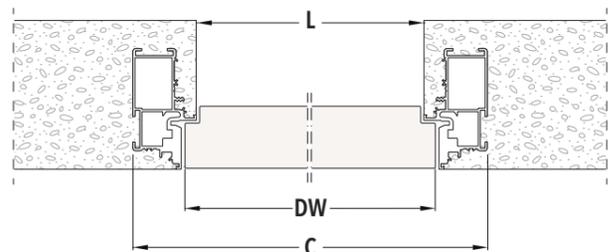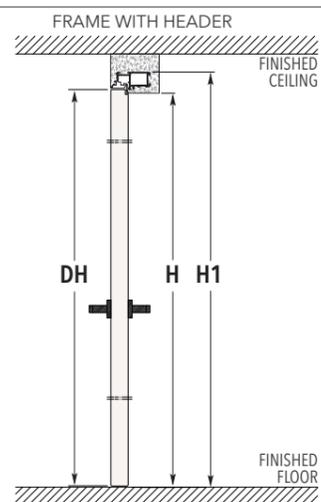

SIZES - FRAME WITH HEADER

PASSAGE SIZE L x H	OVERALL DIMENSIONS C x H1	DOOR PANEL*	
		DW	DH
600 x 2100/2400	692 x 2146/2446	616	2104/2404
650 x 2100/2400	742 x 2146/2446	666	2104/2404
700 x 2100/2400	792 x 2146/2446	716	2104/2404
750 x 2100/2400	842 x 2146/2446	766	2104/2404
800 x 2100/2400	892 x 2146/2446	816	2104/2404
850 x 2100/2400	942 x 2146/2446	866	2104/2404
900 x 2100/2400	992 x 2146/2446	916	2104/2404
950 x 2100/2400	1042 x 2146/2446	966	2104/2404
1000 x 2100/2400	1092 x 2146/2446	1016	2104/2404

SIZES - FRAME WITHOUT HEADER

PASSAGE SIZE L x H	OVERALL DIMENSIONS C x H1	DOOR PANEL*	
		DW	DH
600 x 2700	692 x 2700	616	2693
650 x 2700	742 x 2700	666	2693
700 x 2700	792 x 2700	716	2693
750 x 2700	842 x 2700	766	2693
800 x 2700	892 x 2700	816	2693
850 x 2700	942 x 2700	866	2693
900 x 2700	992 x 2700	916	2693
950 x 2700	1042 x 2700	966	2693
1000 x 2700	1092 x 2700	1016	2693

NOTES

- **Frame with header:** H1 is always 46 mm higher than H.
- Supplied as standard with 3 hinges. Max. door panel weight with 3 hinges: 50 kg.
- Available upon request with 4 hinges. Max. door panel weight with 4 hinges: 65 kg.
- Install at finished floor level.
- * Door panel thickness: 45 mm.

ACCESSORIES


- Door closer
- Self-closing door hinge

ECLISSE SYNTESIS® LINE BATTENTE DOUBLE


OPENINGS




LEFT PUSH DOOR - FIXED RIGHT DOOR

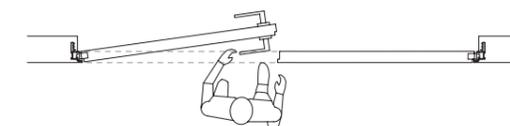


LEFT PULL DOOR - FIXED RIGHT DOOR

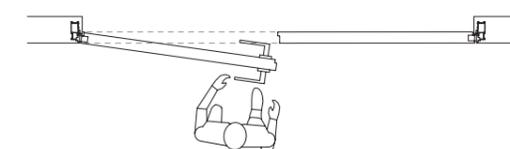


RIGHT PUSH DOOR - FIXED LEFT DOOR

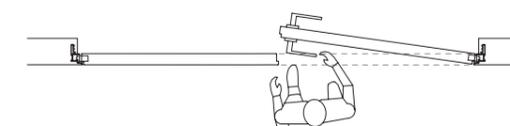


RIGHT PULL DOOR - FIXED LEFT DOOR

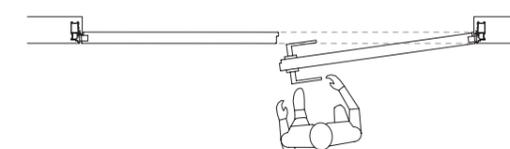

ECLISSE SYNTESIS® LINE BATTENTE DOUBLE is available only with header. The fixed door is kept closed with a latch (supplied with the door panel).

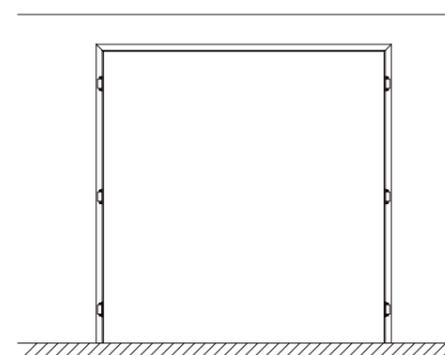

With header

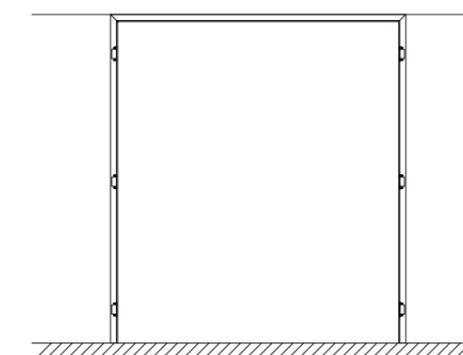

With header flush to ceiling

ECLISSE SYNTESIS® LINE BATTENTE DOUBLE

APPLICATIONS


The frame fits both stud and solid wall.

For solid wall 6 clamps are cemented in the special spaces created in the wall.


For stud wall the frame is fixed with screws to the wood or metal structure through the existing holes.

FIXED LEFT DOOR RIGHT PUSH DOOR OR PULL DOOR


Frame on solid wall

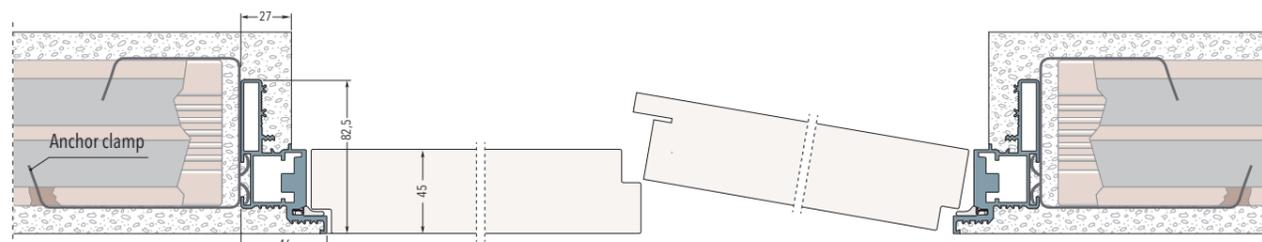


Frame on stud wall with one plasterboard layer - Finished wall thickness 100 mm

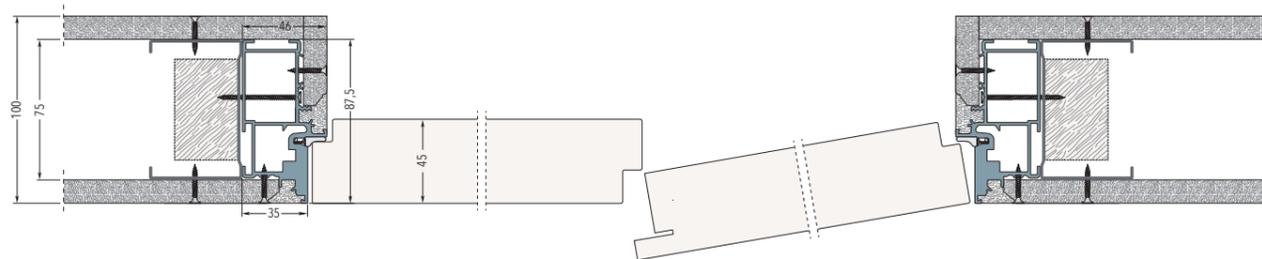

Frame on stud wall with two plasterboard layers - Finished wall thickness 100 mm


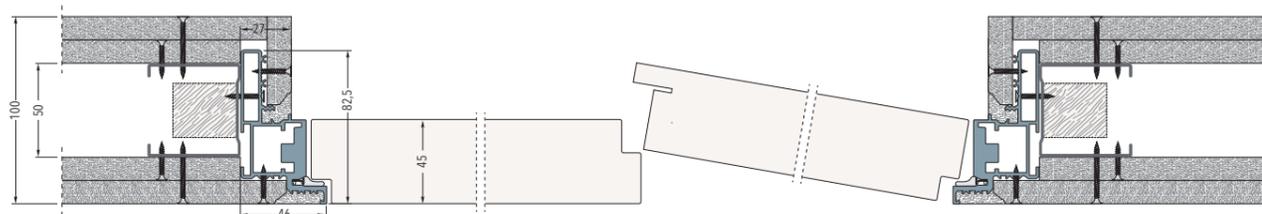


Frame on stud wall with two plasterboard layers - Finished wall thickness 125/150 mm

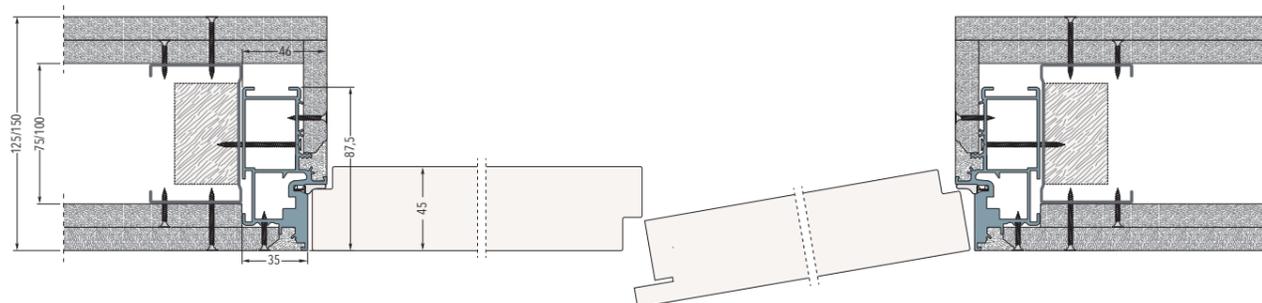

ECLISSE SYNTESIS® LINE BATTENTE DOUBLE

SIZES - FRAME WITH HEADER

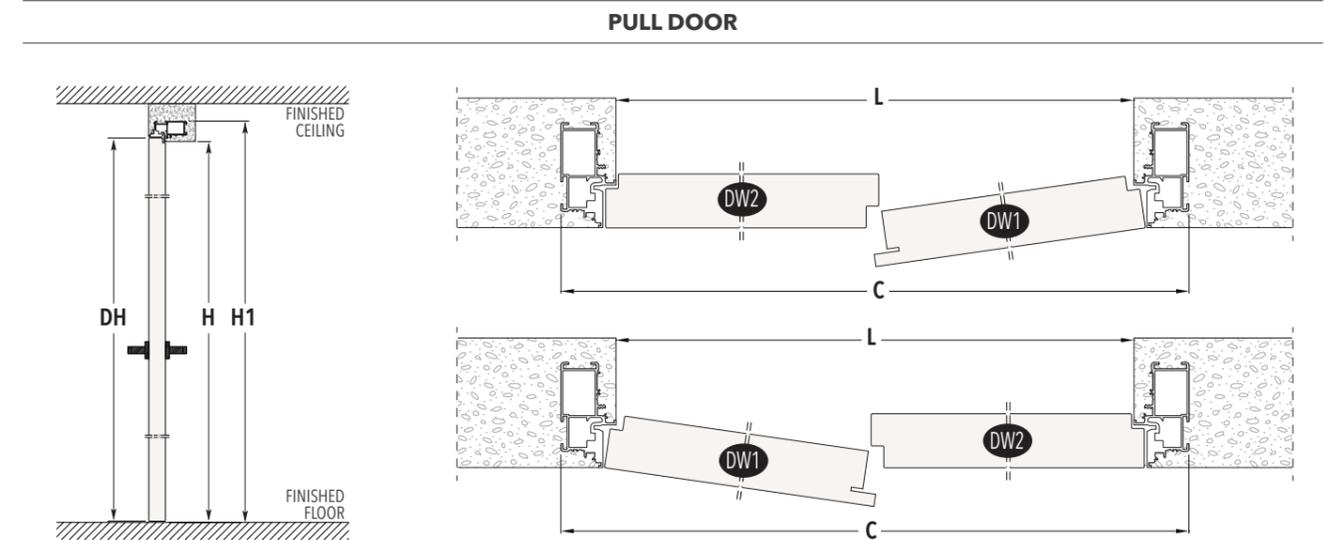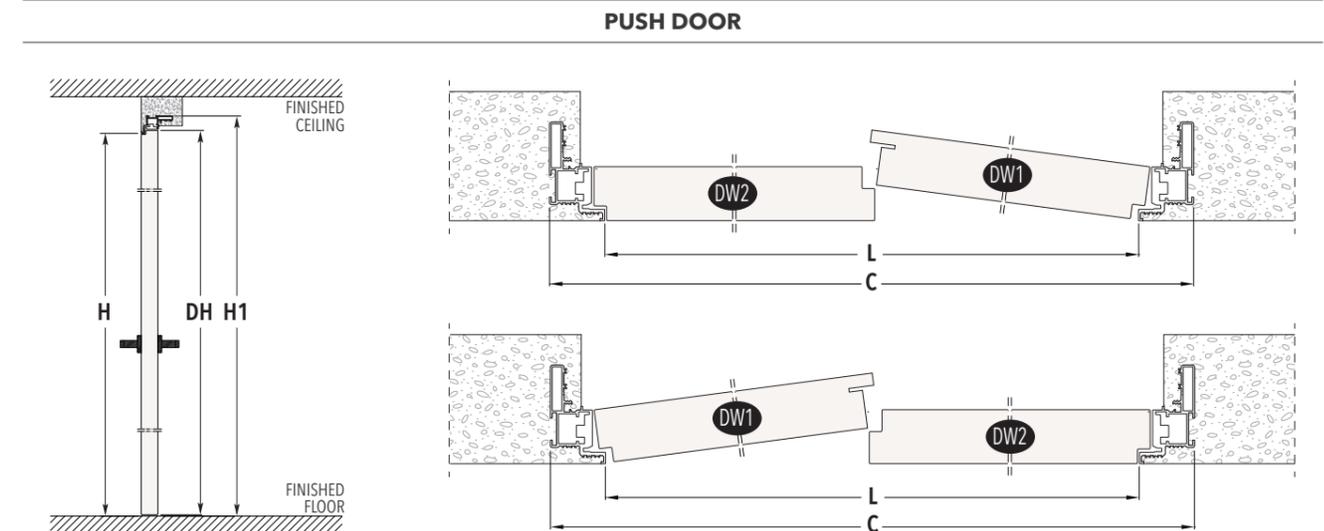

SIZES - FRAME WITH HEADER

PASSAGE SIZE L x H	OVERALL DIMENSIONS C x H1	DOOR PANEL - Thk. 45 mm		
		DW1	DW2	DH
1200 x 2100/2400	1292 x 2146/2446	606	616	2104/2404
1300 x 2100/2400	1392 x 2146/2446	656	666	2104/2404
1400 x 2100/2400	1492 x 2146/2446	706	716	2104/2404
1500 x 2100/2400	1592 x 2146/2446	756	766	2104/2404
1600 x 2100/2400	1692 x 2146/2446	806	816	2104/2404
1700 x 2100/2400	1792 x 2146/2446	856	866	2104/2404
1800 x 2100/2400	1892 x 2146/2446	906	916	2104/2404
1900 x 2100/2400	1992 x 2146/2446	956	966	2104/2404
2000 x 2100/2400	2092 x 2146/2446	1006	1016	2104/2404

NOTES


- ▶ **Frame with header:** H1 is always 46 mm higher than H.
- ▶ It is possible to have asymmetrical door panels.
- ▶ Supplied as standard with 3 hinges. Max. door panel weight with 3 hinges: 50 kg.
- ▶ Available upon request with 4 hinges. Max. door panel weight with 4 hinges: 65 kg.
- ▶ Install at finished floor level.

ACCESSORIES

- ▶ Door closer
- ▶ Self-closing door hinge

ECLISSE SYNTESIS® LINE BATTENTE

with ELECTRIC STRIKE - PRIMER-COATED ANODISED ALUMINIUM FRAME

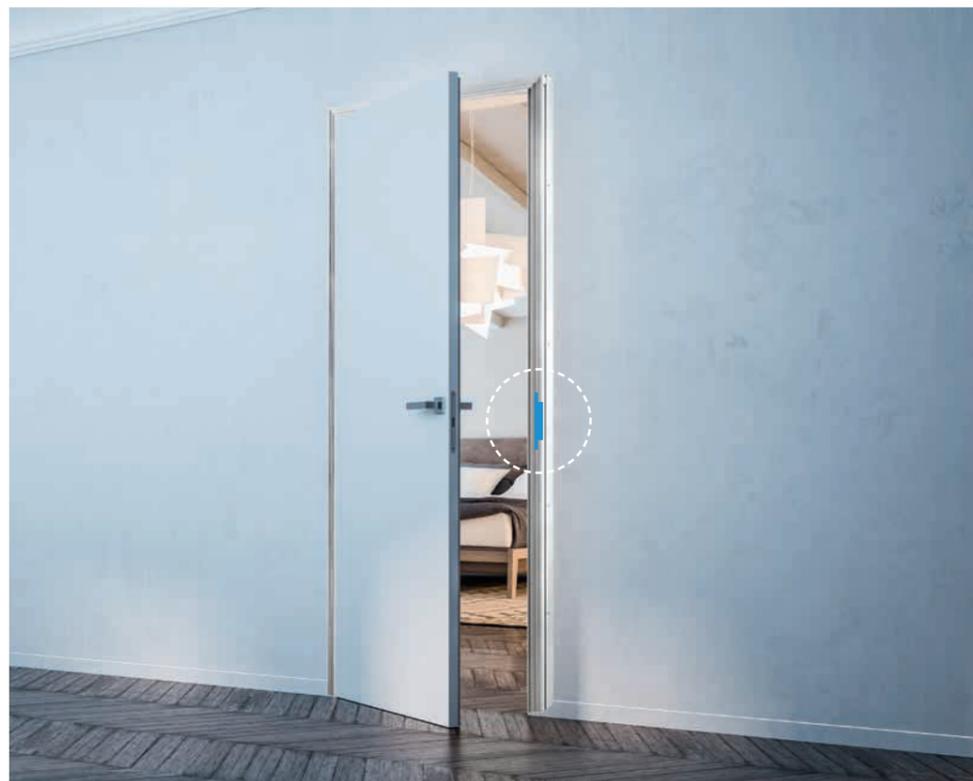


The electric strike for hinged door is an access control device for opening doors via an electric impulse that releases the lock. The device requires the installation of a cylinder lock so that the door can be opened in the event of a power outage.

The activation mechanism (magnetic card, push-button, etc.) is not included.

PUSH DOOR

PULL DOOR

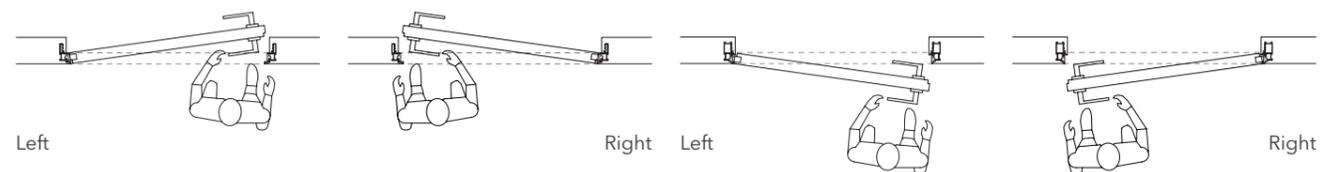

NOTES

- ▶ Available with or without header (same price).
- ▶ Supplied as standard with 3 hinges. Max. door panel weight with 3 hinges: 50 kg.
- ▶ Available upon request with 4 hinges. Max. door panel weight with 4 hinges: 65 kg.
- ▶ Combination with the handle+knob set is recommended.
- ▶ Activation mechanism (magnetic card, push-button, etc.) not included.
- ▶ Install at finished floor level.

ECLISSE SYNTESIS® LINE BATTENTE

INCLINED




ECLISSE SYNTESIS® LINE BATTENTE can also be produced with a sloping header. The ideal solution for sloping ceilings, attics or understair spaces.

PULL DOOR

The frame is available only for pull version for solid and stud walls.



ECLISSE SYNTESIS® LINE BATTENTE INCLINED can be realized with different angles (α), both with or without header.

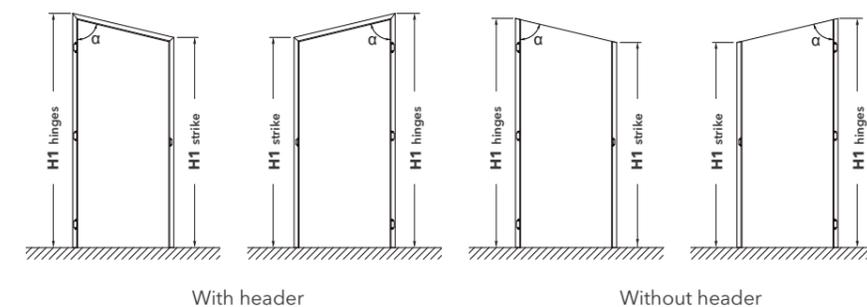

NOTES

- ▶ Available with or without header (same price).
- ▶ Angle α from 60° to 89°.
- ▶ Hinges are always on the higher side.
- ▶ H1 = overall height of the frame.
- ▶ Supplied as standard with 3 hinges. Max. door panel weight with 3 hinges: 50 kg.
- ▶ Available upon request with 4 hinges. Max. door panel weight with 4 hinges: 65 kg.
- ▶ Install at finished floor level.


ECLISSE SYNTESIS® BATTENTE GLASS

TECHNICAL DETAILS

OPENINGS




PUSH DOOR

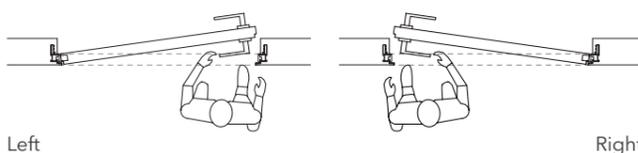

Left

Right

PULL DOOR

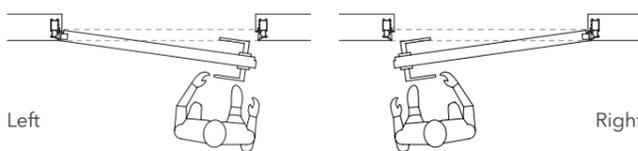


Left

Right


VERSIONS

ECLISSE SYNTESIS® BATTENTE GLASS is only available with header.

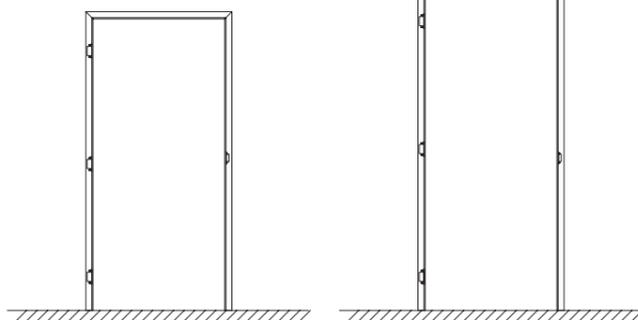

With header

With header
flush to ceiling

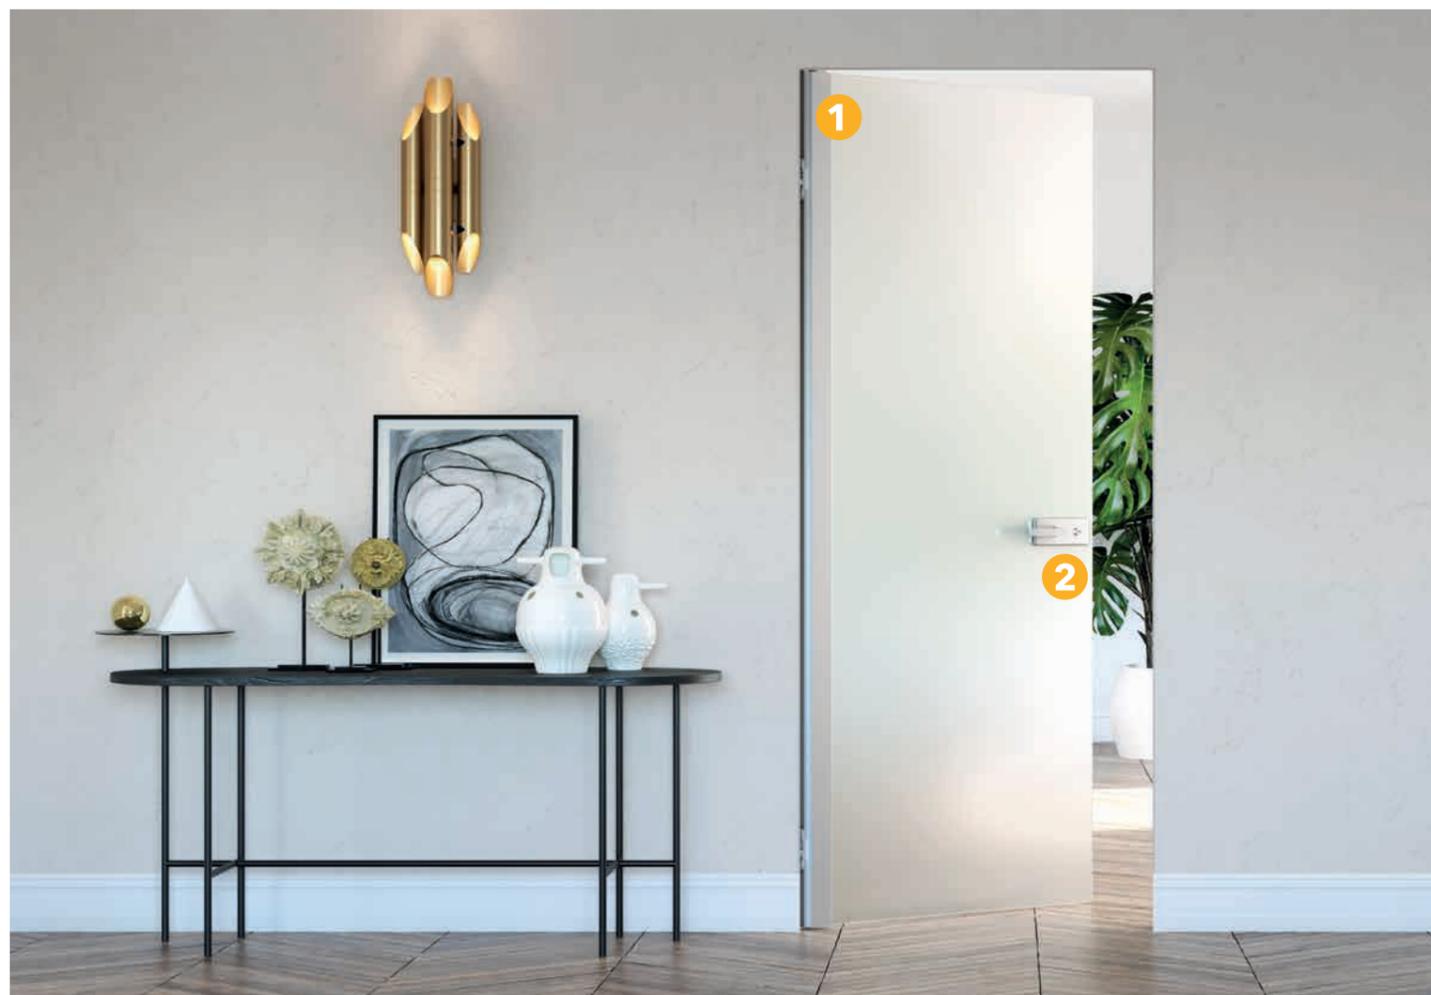

1

The 8 mm tempered glass door is supported by a vertical anodized aluminium profile, while the hinges, completely hidden, ensure good stability and load capacity even for big doors. For the list of compatible handles, see the HANDLES section.


PUSH DOOR



Details of the anodized aluminium vertical profile with closed and open door.

2

LOCK DIMENSIONS

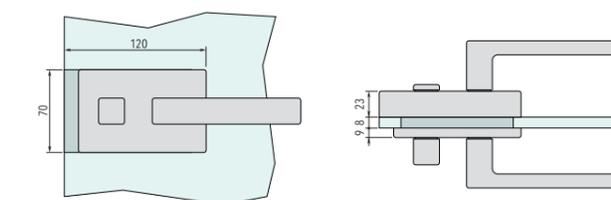

Dimensions are given in mm.

SUPPLY METHODS



FRAME ONLY

DOOR KIT

Includes hardware, gaskets, lock and anodized aluminium vertical profile (handle not included).

PULL DOOR



Details of the anodized aluminium vertical profile with closed and open door.

ECLISSE SYNTESIS® BATTENTE GLASS

APPLICATIONS

The frame fits both stud and solid wall.



For solid wall 6 clamps are cemented in the special spaces created in the wall.

For stud wall the frame is fixed with screws to the wood or metal structure through the existing holes.



PUSH DOOR

PULL DOOR



Frame on solid wall

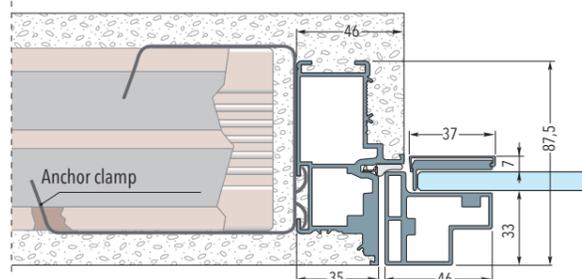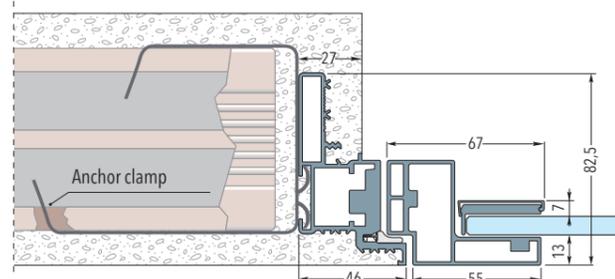



Frame on stud wall with one plasterboard layer - Finished wall thickness 100 mm

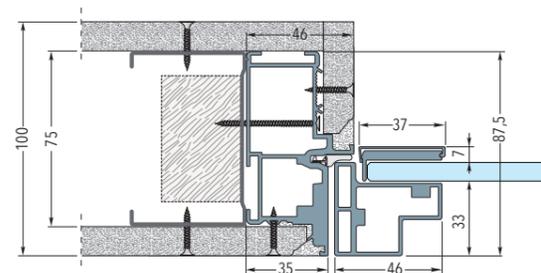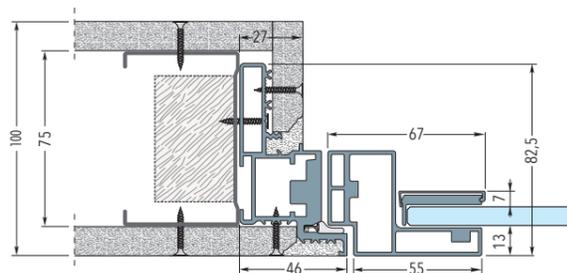

Frame on stud wall with two plasterboard layers - Finished wall thickness 100 mm

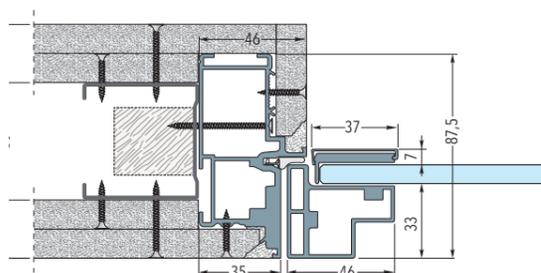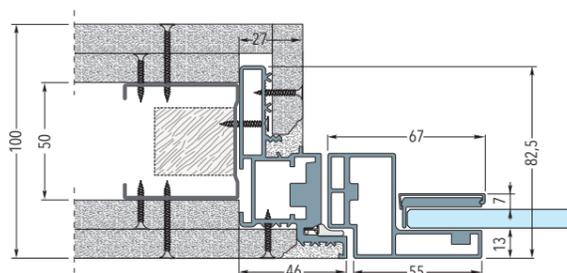

Frame on stud wall with two plasterboard layers - Finished wall thickness 125/150 mm

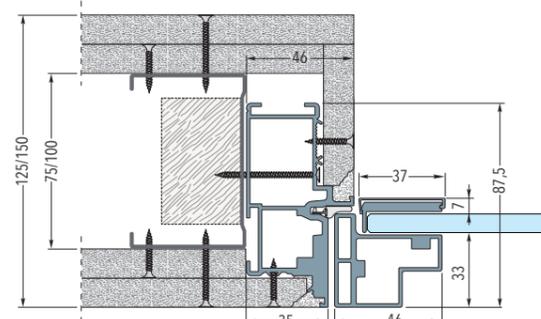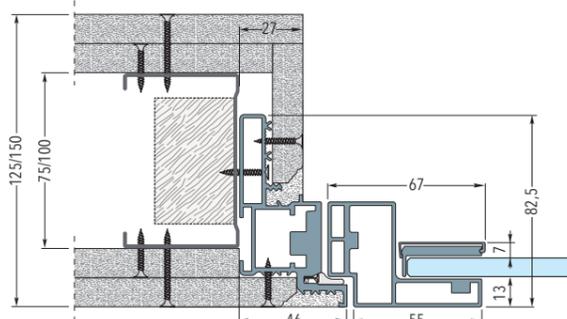



ECLISSE SYNTESIS® BATTENTE GLASS

SIZES - FRAME WITH HEADER





PUSH DOOR

FRAME WITH HEADER

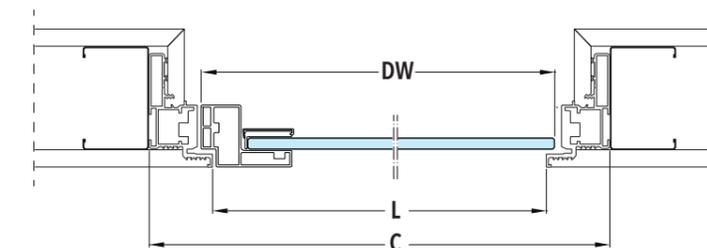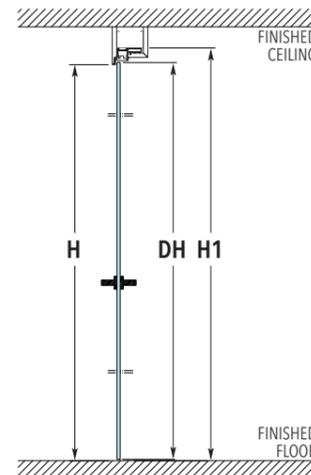

PULL DOOR

FRAME WITH HEADER

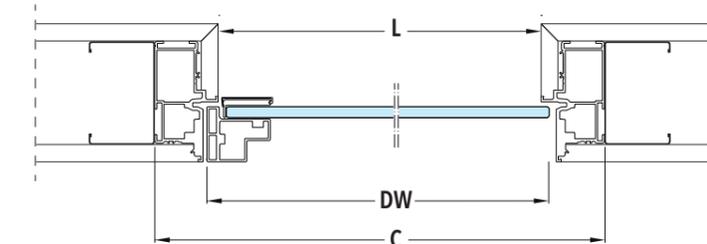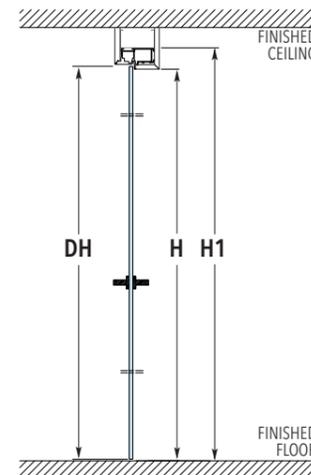

SIZES - FRAME WITH HEADER

PASSAGE SIZE L x H	OVERALL DIMENSIONS C x H1	GLASS DOOR PANEL - Thk. 8 mm	
		DW	DH
600 x 2100/2400	692 x 2146/2446	616	2098/2398
650 x 2100/2400	742 x 2146/2446	666	2098/2398
700 x 2100/2400	792 x 2146/2446	716	2098/2398
750 x 2100/2400	842 x 2146/2446	766	2098/2398
800 x 2100/2400	892 x 2146/2446	816	2098/2398
850 x 2100/2400	942 x 2146/2446	866	2098/2398
900 x 2100/2400	992 x 2146/2446	916	2098/2398
950 x 2100/2400	1042 x 2146/2446	966	2098/2398
1000 x 2100/2400	1092 x 2146/2446	1016	2098/2398

NOTES

- ▶ Height intervals every 50 mm, from 1650 mm to 2700 mm.
- ▶ If H > 2200 mm the door frame is fitted for 4 hinges.
- ▶ Install at finished floor level.

FLUSH WALL CLOSURES

ECLISSE SYNTESIS® AREO - FRAMES - SIZES




A flush frame which conforms with the surrounding space.

ECLISSE SYNTESIS® AREO offers the perfect way to disguise built-in cupboards and closets elegantly and discreetly, combining function with form. The frame can be retracted seamlessly into the wall without protruding. It can be modified to match the surrounding space and either painted or covered with appropriate wallpaper. With its clear lines, ECLISSE SYNTESIS® AREO also meets the latest requirements of style, containing built-in cupboards or discreetly concealing areas and spaces which are preferably not visible.

ECLISSE SYNTESIS® AREO can be customised in terms of the opening and dimensions satisfying any technical and functional requirements without sacrificing appearance.



SIZES

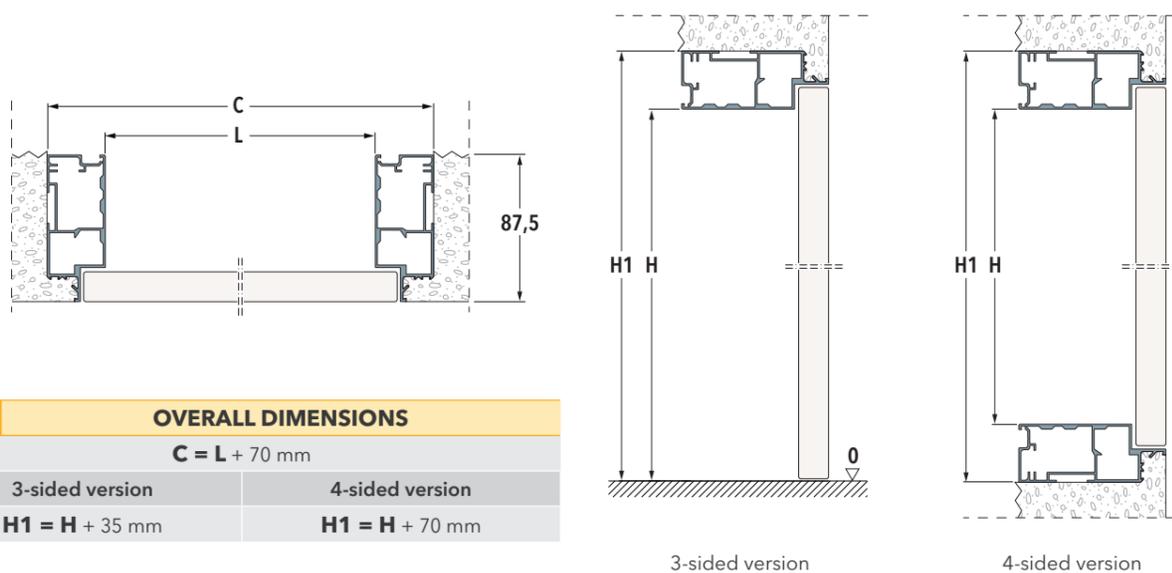


i OVERALL DIMENSIONS	
C = L + 70 mm	
3-sided version	4-sided version
H1 = H + 35 mm	H1 = H + 70 mm

FLUSH WALL CLOSURES


ECLISSE SYNTESIS® AREO - APPLICATIONS

PULL DOOR


Frame on solid wall

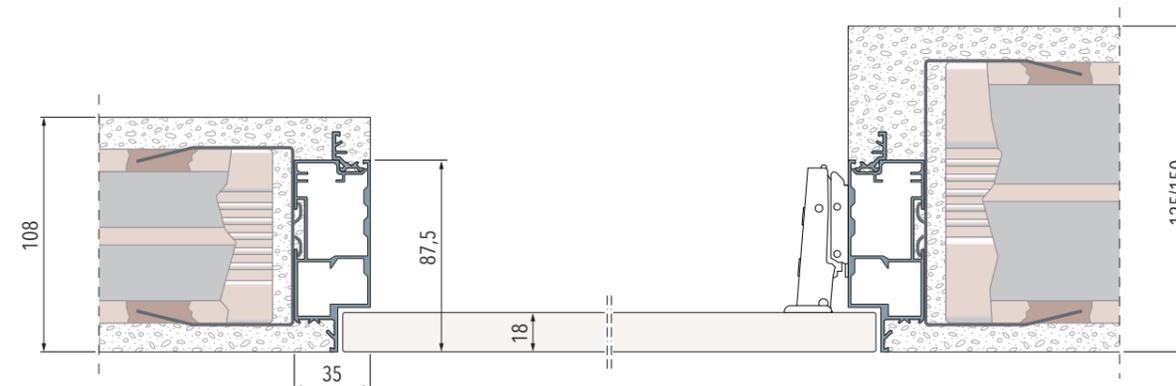


Frame on stud wall, with one or two plasterboard layers and finished according to customer's specifications

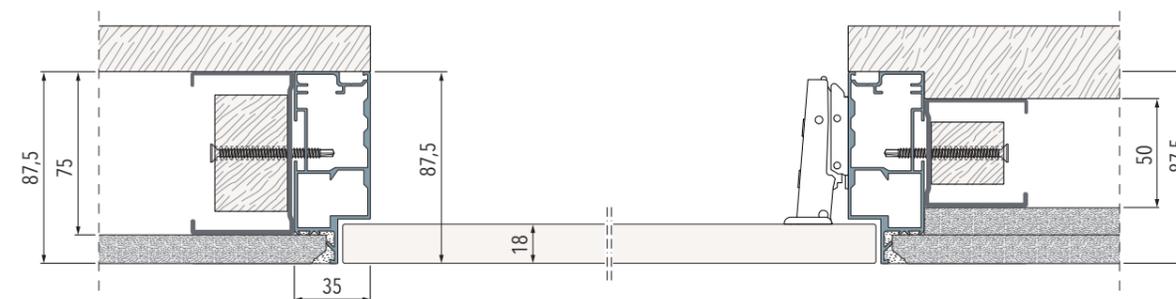

Frame on stud wall, with single or double layer

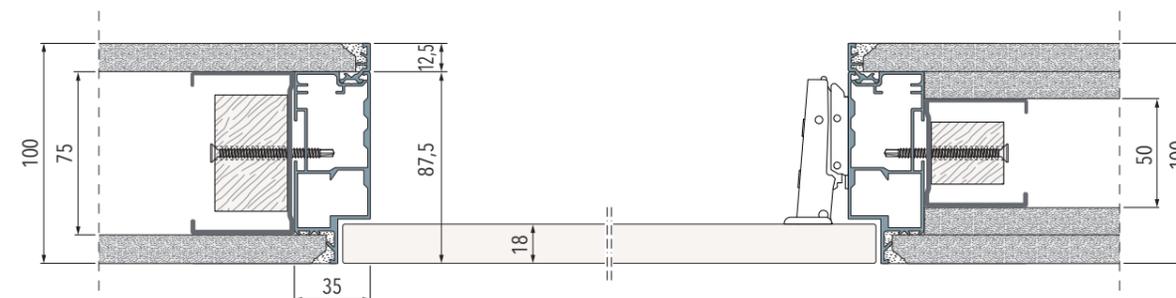

Frame on stud wall, with single or double layer for internal reveal

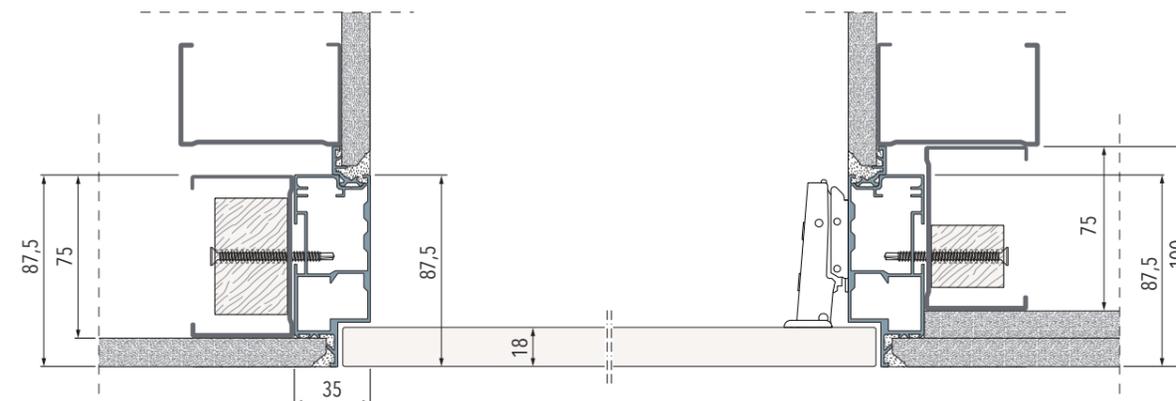

Dimensions are given in mm

ECLISSE CATALOGUE - 105

FLUSH WALL CLOSURES

ECLISSE SYNTESIS® AREO - VERSIONS - SIZES

SINGLE DOOR



Single door frame, 3-sided



Single door frame, 4-sided



Inclined frame for single door frame, 3-sided



Inclined frame for single door frame, 4-sided

3- OR 4-SIDED SOLUTIONS

	PASSAGE SIZE				OVERALL DIMENSIONS			
	L		H		C		H1	
	min	max	min	max	min	max	min	max
3-sided versions	300	÷ 650	300	÷ 2700	370	÷ 720	335	÷ 2735
4-sided versions	300	÷ 650	300	÷ 2700	370	÷ 720	370	÷ 2770

DOUBLE DOOR



Double door frame, 3-sided



Double door frame, 4-sided

3- OR 4-SIDED SOLUTIONS

	PASSAGE SIZE				OVERALL DIMENSIONS			
	L		H		C		H1	
	min	max	min	max	min	max	min	max
3-sided versions	600	÷ 1300	300	÷ 2700	670	÷ 1370	335	÷ 2735
4-sided versions	600	÷ 1300	300	÷ 2700	670	÷ 1370	370	÷ 2770

TOP-HUNG PANEL



4-sided frame with top-hung panel

BOTTOM-HINGED PANEL



4-sided frame with bottom-hinged panel

4-SIDED SOLUTION

	PASSAGE SIZE				OVERALL DIMENSIONS			
	L		H		C		H1	
	min	max	min	max	min	max	min	max
	600	÷ 1800	300	÷ 650	670	÷ 1870	370	÷ 720

NOTES

- Supplied as standard with push-pull opening system, except the three-sided double door.
- For the 3-sided double door version a handle is needed.

FLUSH WALL CLOSURES

ECLISSE SYNTESIS® TECH - FRAMES - SIZES





ECLISSE SYNTESIS® TECH is the solution that completes ECLISSE SYNTESIS® FLUSH COLLECTION's range. It allows to conceal technical rooms. Electrical wiring, plumbing, and even closets can now be concealed and discreetly integrated into the wall. Thanks to ECLISSE SYNTESIS® TECH, the wall looks completely unchanged while the technical spaces remain accessible, to be open only when needed through comfortable push-pull openings. Handles with lever or key are also available on request.

Customizable with any type of opening, single or double leaf, folding or removable panel, it allows you to hide any item or equipment that we do not want to be visible, leaving it inspectable for any maintenance.



SIZES

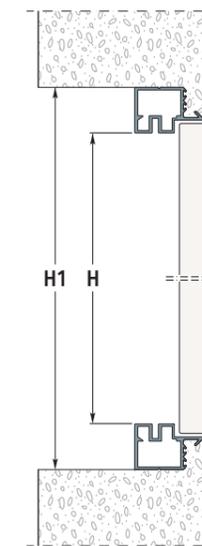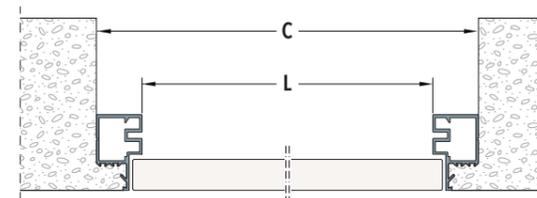

i

OVERALL DIMENSIONS

$$C = L + 53 \text{ mm}$$


$$H1 = H + 53 \text{ mm}$$

FLUSH WALL CLOSURES


ECLISSE SYNTESIS® TECH - APPLICATIONS

PULL DOOR


Frame on solid wall

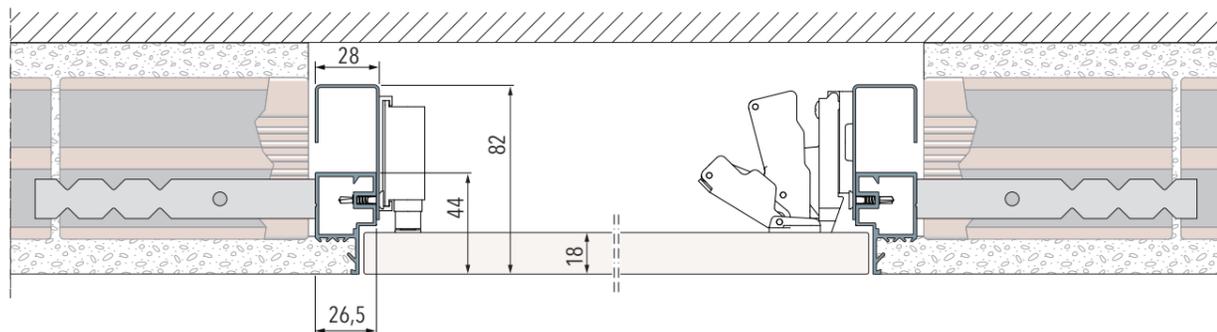

Frame on stud wall with one plasterboard layer

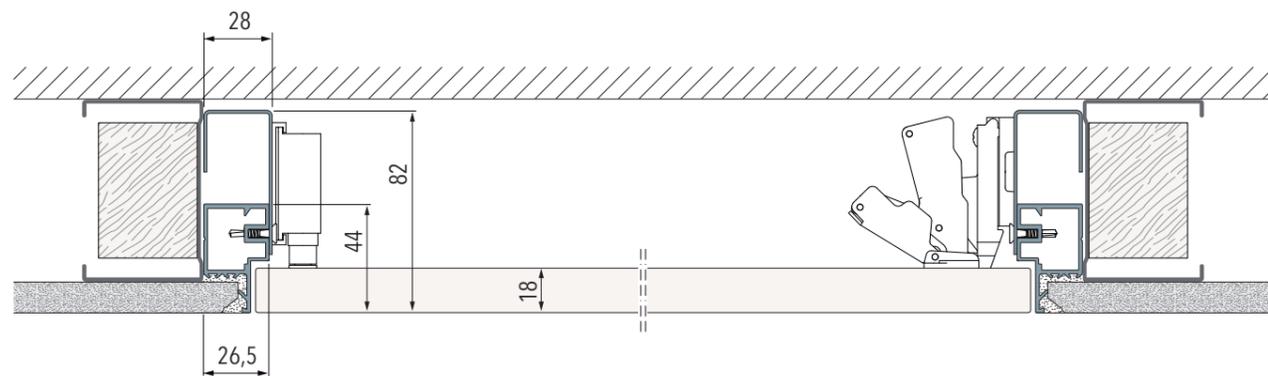

Frame on stud wall with two plasterboard layers

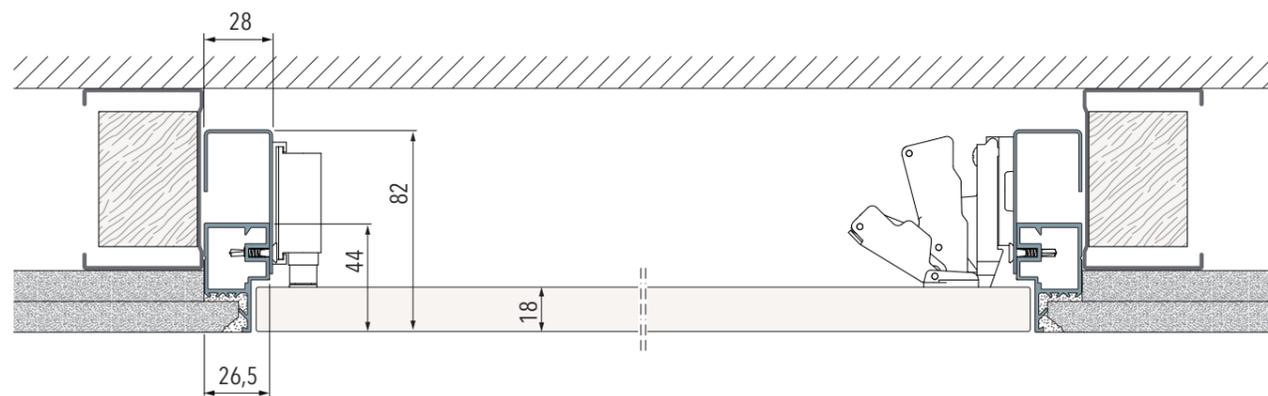


FLUSH WALL CLOSURES

ECLISSE SYNTESIS® TECH - VERSIONS - SIZES

SINGLE DOOR

Option with hinges on the vertical side
(Useful space between hinge and lock around 100 mm less than the passage size)




A single frame for right-hinged or left-hinged opening

PASSAGE SIZE					OVERALL DIMENSIONS						
min	L	max	min	H	max	min	C	max	min	H1	max
300	÷	600	300	÷	1600	353	÷	653	353	÷	1653

DOUBLE DOOR

Option with hinges on the vertical side
(Useful space between hinge and lock around 150 mm less than the passage size)



Double door frame, 3-sided

PASSAGE SIZE					OVERALL DIMENSIONS						
min	L	max	min	H	max	min	C	max	min	H1	max
600	÷	1000	300	÷	1600	653	÷	1053	353	÷	1653
300+300		500+500									

TOP-HUNG PANEL


BOTTOM-HINGED PANEL

REMOVABLE PANEL


Options with hinges on the horizontal side or no hinges
(Useful space between hinge and lock around 100 mm less than the passage size)



Hold open device supplied as standard



Safety chain device supplied as standard

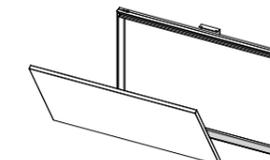

Safety chain device supplied as standard

PASSAGE SIZE					OVERALL DIMENSIONS						
min	L	max	min	H	max	min	C	max	min	H1	max
300	÷	1600	300	÷	600	353	÷	1653	353	÷	653

NOTES

► **Single door:**
Supplied as standard with push-pull opening system.

► **Double door:**
Supplied as standard with push-pull opening system.

ECLISSE MIMESI

DECORATIVE ALUMINIUM PROFILES



The new ECLISSE MIMESI profiles made from anodised aluminium have been developed to allow sliding door models of the ECLISSE SYNTESIS® FLUSH COLLECTION and an adjacent ECLISSE 40 frame to communicate with each other and to create a harmonious, cohesive room space.

The profiles can be used with ECLISSE SYNTESIS® LINE and ECLISSE SYNTESIS® LUCE, making allowance for the characteristic close tolerances of a flush pocket door system, at the same time ensuring the integrity of the style throughout the house.

ECLISSE MIMESI is available for sliding door systems with finished wall thicknesses of 100, 108, 125 and 150 mm.

FINISHES



CHAMPAGNE



BRONZE



TOBACCO




WHITE RAL 9010

NOTES

- Bars to be cut on site.
- For wooden and glass aluminium doors.

ECLISSE 40 COLLECTION

SYSTEMS FOR SPLAYED FRAMES

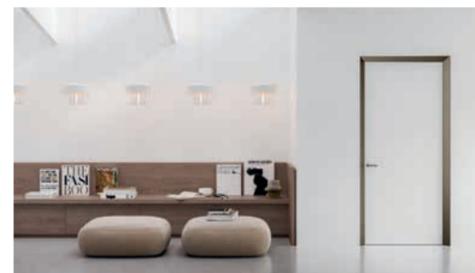

ECLISSE 40 SINGLE

Splayed door frame for single hinged door

120



ECLISSE 40 DOUBLE

Splayed door frame for double hinged door

124

ECLISSE 40 COLLECTION

SYSTEMS FOR SPLAYED FRAMES

THE FRAME SEEN FROM
A NEW PERSPECTIVE.

Not settling for the status quo, not taking anything for granted and constantly challenging the world view creates the space to design from a new perspective. Because just when you think you know something, you have to change your approach and look at it from a new angle.

ON ONE SIDE

a door flush with the wall gives elegance and discretion.


ON THE OTHER SIDE

geometric lines that go deep. The frame empties the wall and enhances the room. Like a picture frame, it encloses the door and invites us to cross through it.



ECLISSE 40 COLLECTION

SYSTEMS FOR SPLAYED FRAMES

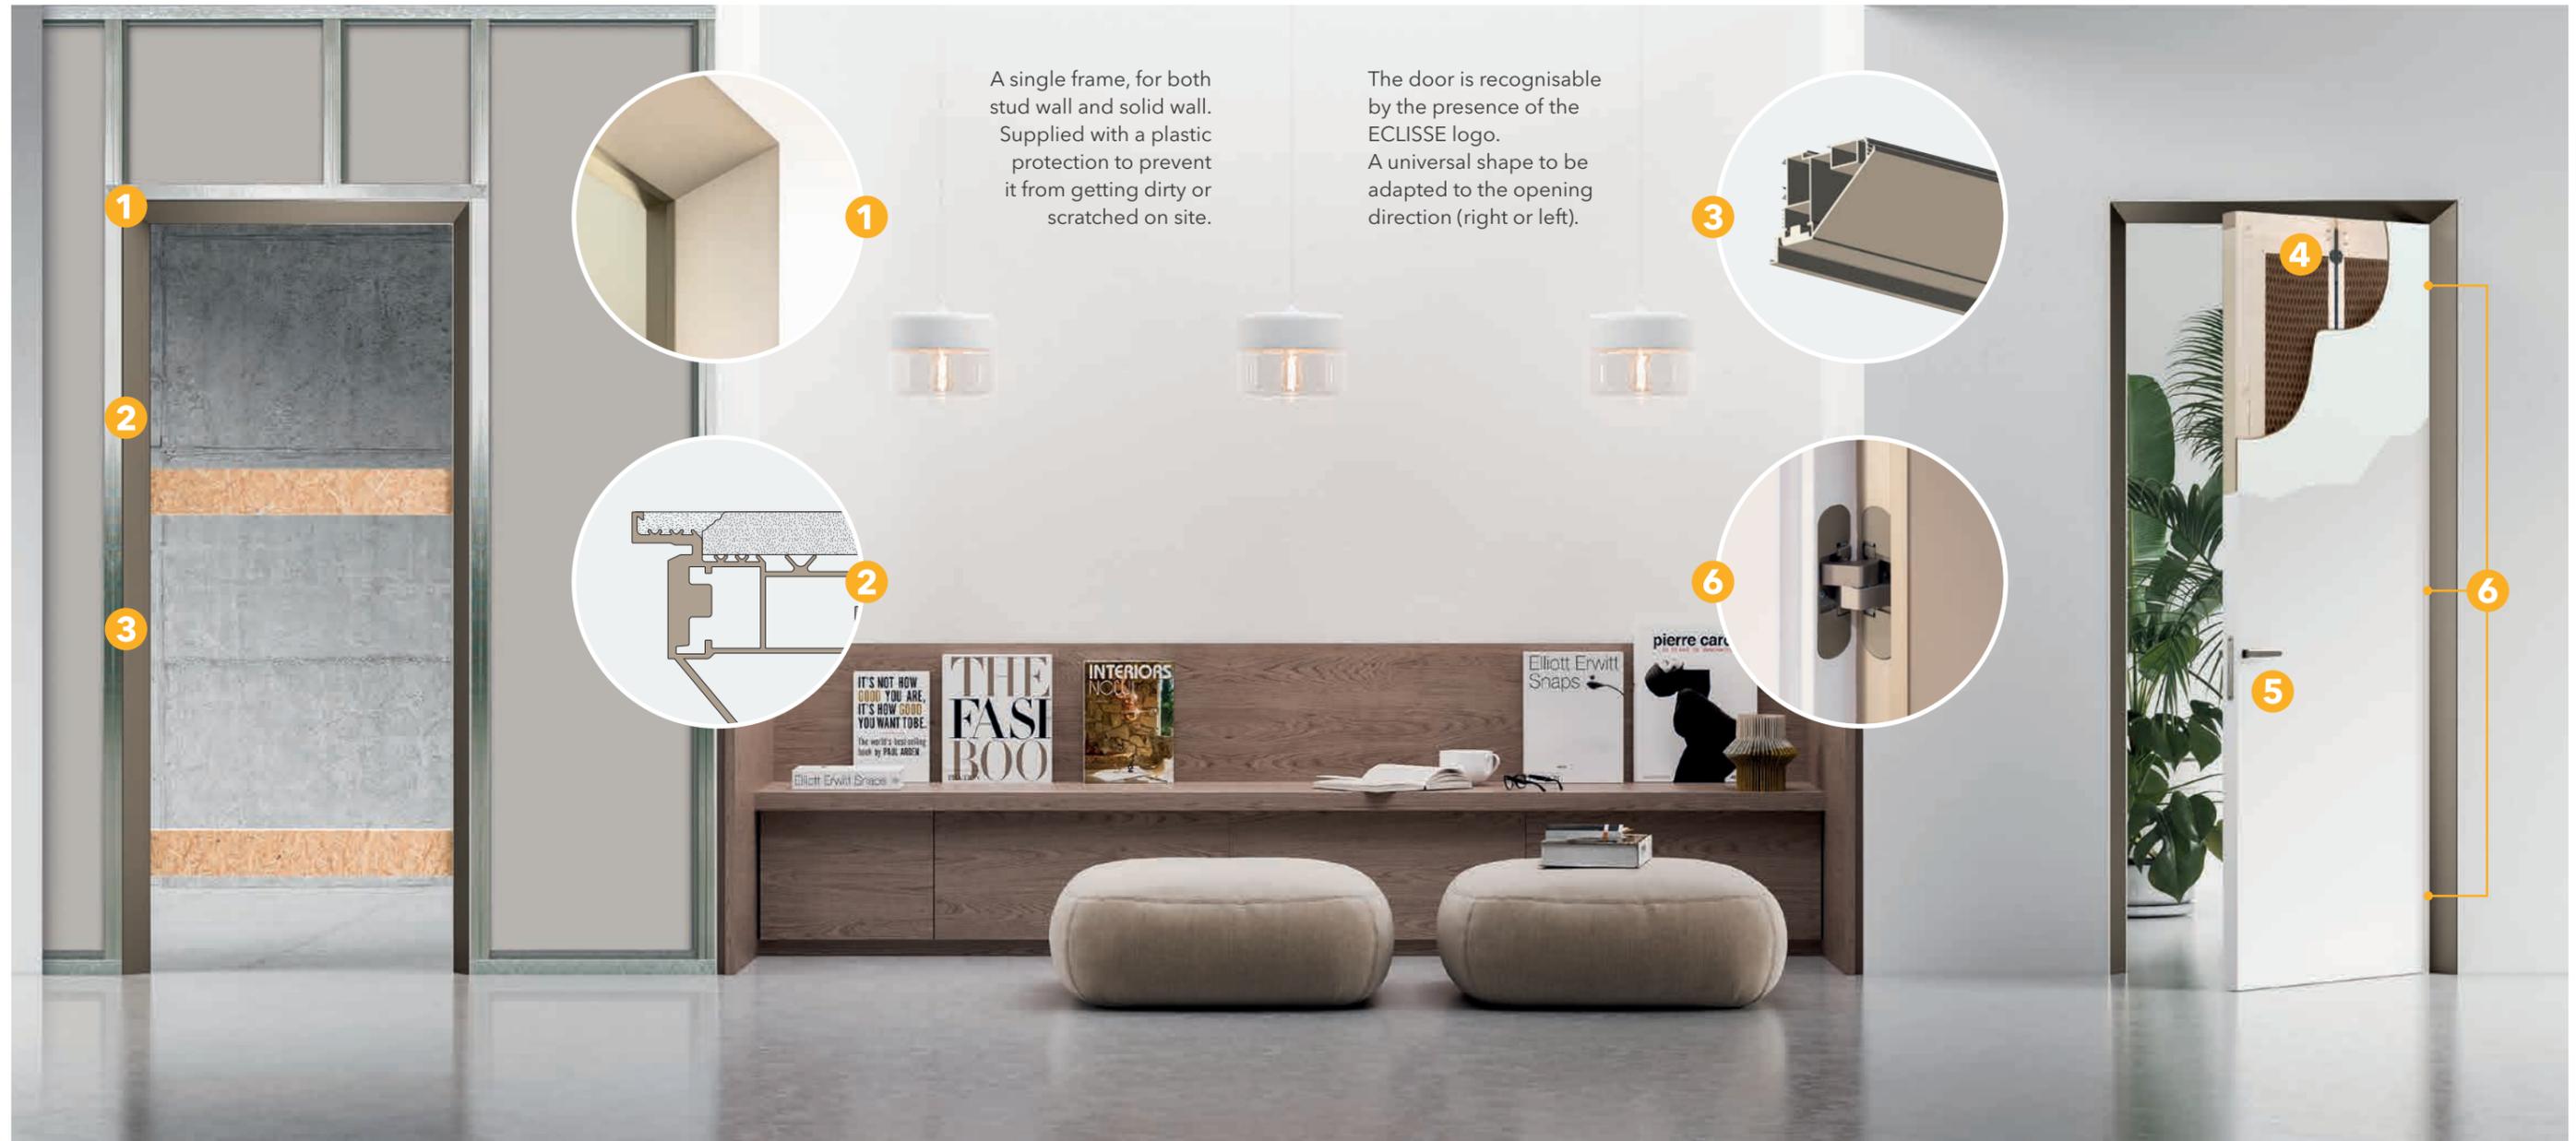

A single frame, for both stud wall and solid wall. Supplied with a plastic protection to prevent it from getting dirty or scratched on site.

The door is recognisable by the presence of the ECLISSE logo. A universal shape to be adapted to the opening direction (right or left).

1

PAINTABLE AND DURABLE OVER TIME

The aluminium frame undergoes an anodising treatment against oxidation and is then painted in different colours. The primer-coated version favours the adhesion of the paints.

2

NO CRACKS!

The frame profile is specifically designed to avoid the formation of cracks.

3

VERY ROBUST FRAME

The frame is made of anodised aluminium and weighs about 3.5 kg per linear meter (for Thk. 125 mm).

4

TENSIONING ROD

A special device adjustable at any time that keeps the door panel in constant tension, ensuring the perfect coplanarity between the door and the wall.

5

MAGNETIC LOCK

Modern design and minimal lines: it stays flush to the plate and guarantees an extraordinary softness while closing.

The eccentric strike plate

- Minimal design, it also remains flush to the frame.
- Eccentric: it allows little installation imperfections to be fixed, always ensuring a perfect locking.


Note: it comes as standard without lock or with key lock.

6

3 ADJUSTABLE HINGES


Adjustable on the 3 axes (height, width, depth) for a perfect calibration of the perimeter size.

Note: for doors weighing more than 50 kg (max. 65 kg) 4 hinges are needed.



ECLISSE 40 COLLECTION

SYSTEMS FOR SPLAYED FRAMES - FINISHES

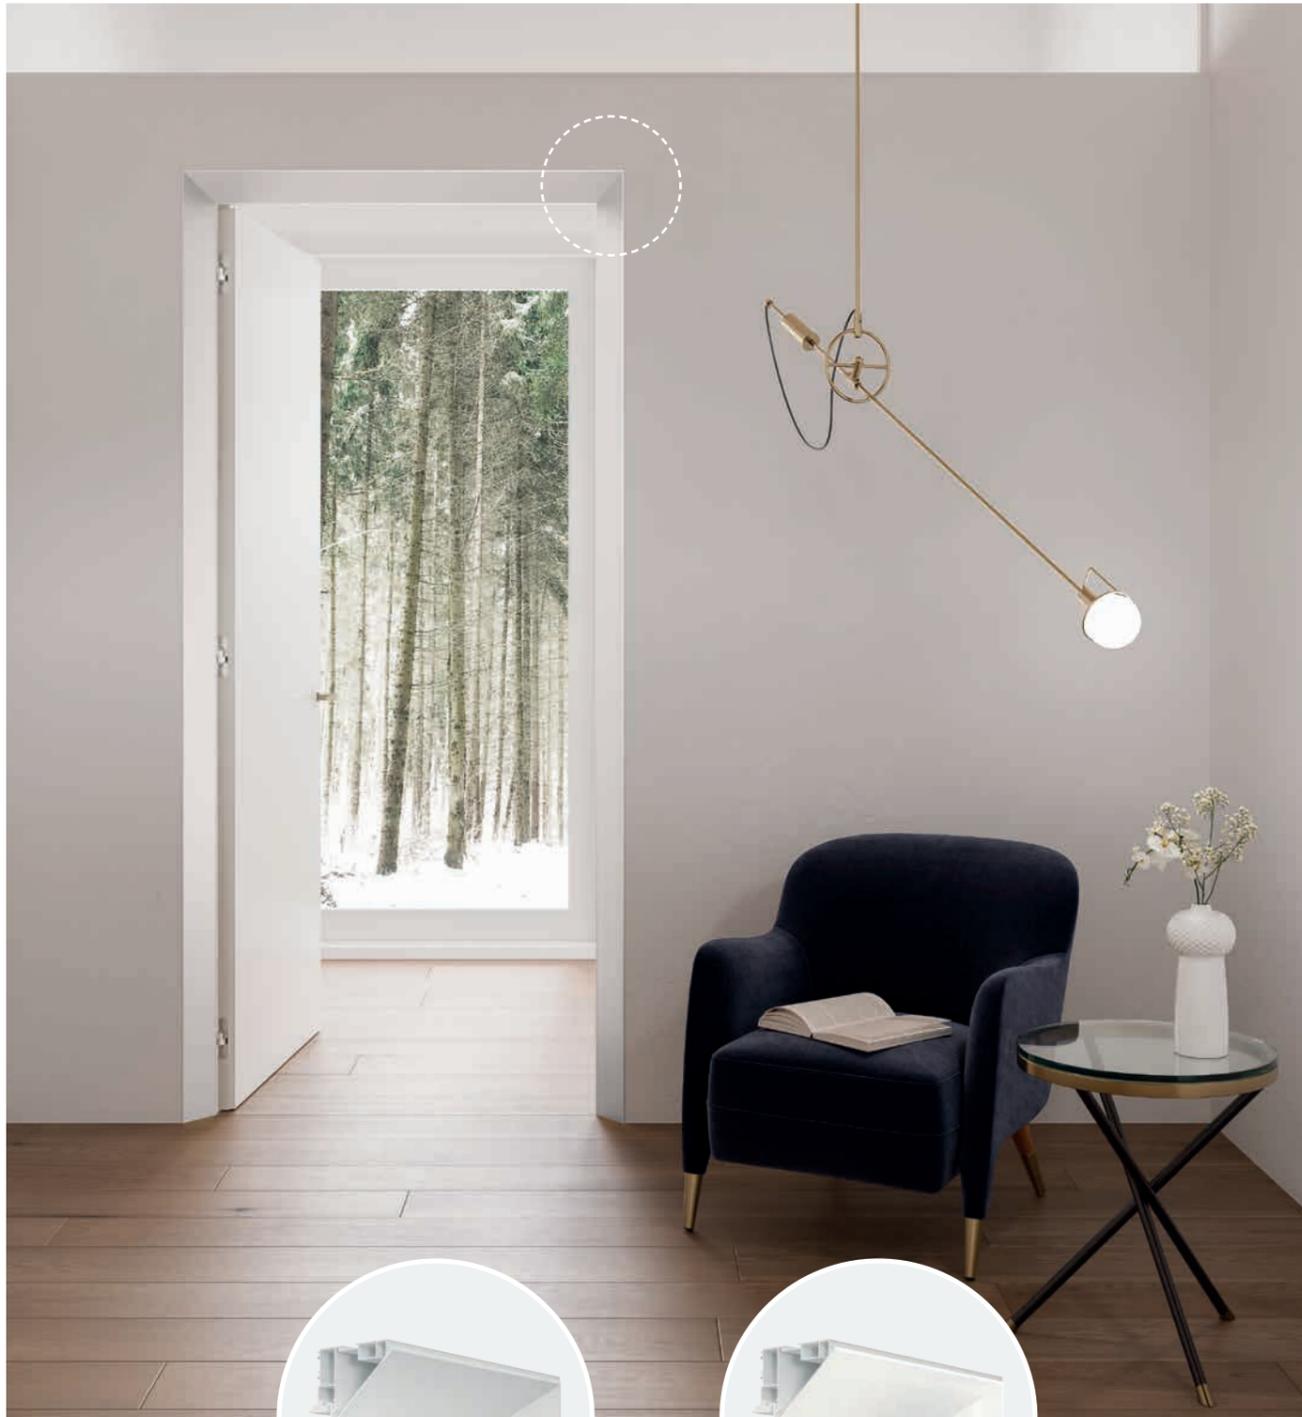

PRIMER-COATED



WHITE RAL 9010



CHAMPAGNE



BRONZE





TOBACCO




ECLISSE 40 SINGLE


OPENINGS

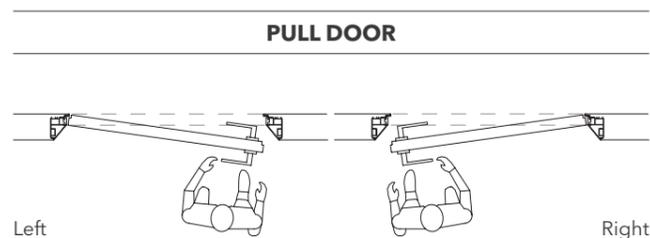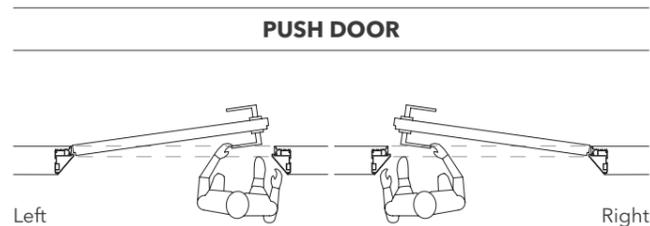


The distinctive feature of ECLISSE 40 is the possibility to install the doors flush with the ceiling, thanks to the option with no header, in order to achieve a total integration among door, wall and ceiling.

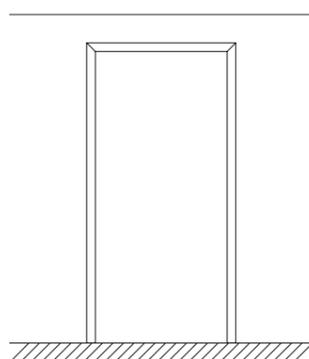

With header

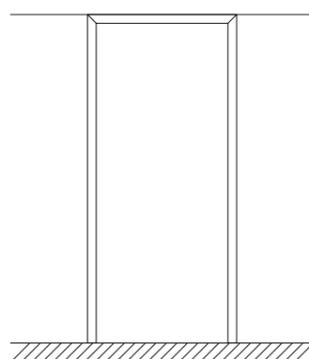

With header
flush to ceiling

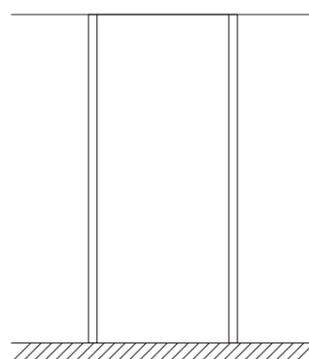

Without header
(the door is flush to ceiling)

ECLISSE 40 SINGLE

APPLICATIONS



The frame fits both stud and solid wall.

For solid wall 6 clamps are cemented in the special spaces created in the wall.



For stud wall the frame is fixed with screws to the wood or metal structure through the existing holes.

PUSH DOOR **PUSH DOOR**



Frame on solid wall - Finished wall thickness 108/125/150 mm

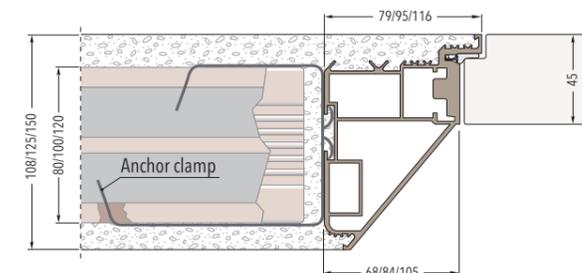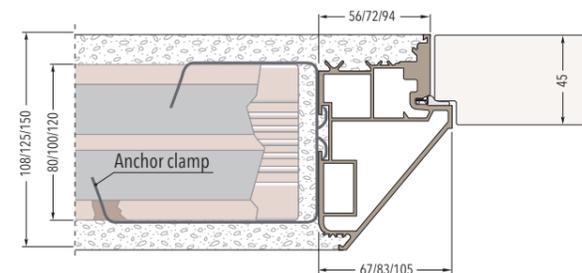

Frame on stud wall with one plasterboard layer - Finished wall thickness 100/125 mm

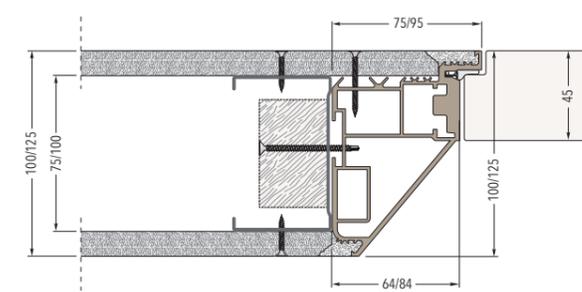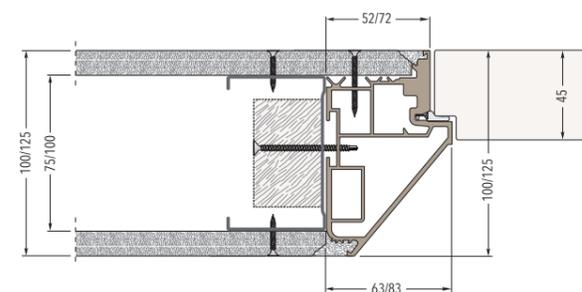


Frame on stud wall with two plasterboard layers - Finished wall thickness 100/125/150 mm

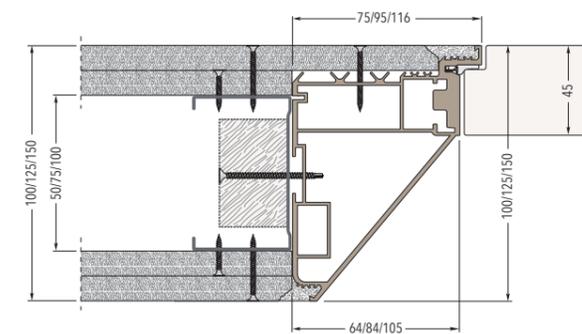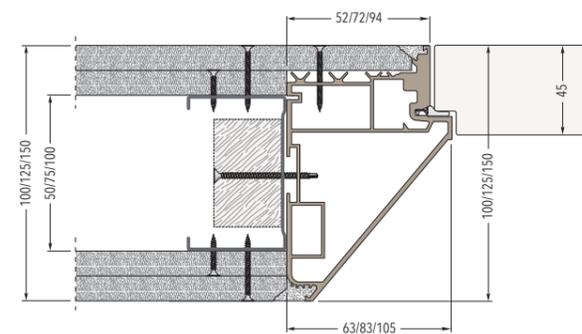

ECLISSE 40 SINGLE

SIZES - FRAME WITH HEADER - **PUSH DOOR - PULL DOOR**

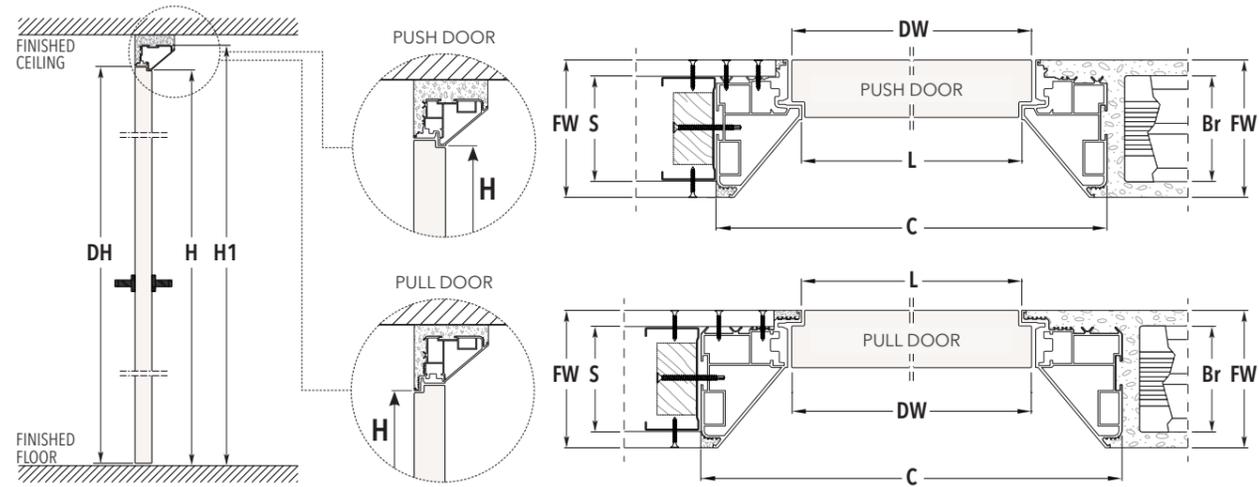

PASSAGE SIZE L x H	FINISHED WALL 100		FINISHED WALL 108		DOOR PANEL Thk. 45 mm	
	OVERALL DIMENSIONS C x H1		OVERALL DIMENSIONS C x H1		DW	DH
	PUSH DOOR	PULL DOOR	PUSH DOOR	PULL DOOR		
600 x 2100/2400	726 x 2163/2463	750 x 2175/2475	734 x 2167/2467	758 x 2179/2479	616	2104/2404
700 x 2100/2400	826 x 2163/2463	850 x 2175/2475	834 x 2167/2467	858 x 2179/2479	716	2104/2404
800 x 2100/2400	926 x 2163/2463	950 x 2175/2475	934 x 2167/2467	958 x 2179/2479	816	2104/2404
900 x 2100/2400	1026 x 2163/2463	1050 x 2175/2475	1034 x 2167/2467	1058 x 2179/2479	916	2104/2404
1000 x 2100/2400	1126 x 2163/2463	1150 x 2175/2475	1134 x 2167/2467	1158 x 2179/2479	1016	2104/2404

PASSAGE SIZE L x H	FINISHED WALL 125		FINISHED WALL 150		DOOR PANEL Thk. 45 mm	
	OVERALL DIMENSIONS C x H1		OVERALL DIMENSIONS C x H1		DW	DH
	PUSH DOOR	PULL DOOR	PUSH DOOR	PULL DOOR		
600 x 2100/2400	766 x 2183/2483	790 x 2195/2495	810 x 2205/2505	832 x 2216/2516	616	2104/2404
700 x 2100/2400	866 x 2183/2483	890 x 2195/2495	910 x 2205/2505	932 x 2216/2516	716	2104/2404
800 x 2100/2400	966 x 2183/2483	990 x 2195/2495	1010 x 2205/2505	1032 x 2216/2516	816	2104/2404
900 x 2100/2400	1066 x 2183/2483	1090 x 2195/2495	1110 x 2205/2505	1132 x 2216/2516	916	2104/2404
1000 x 2100/2400	1166 x 2183/2483	1190 x 2195/2495	1210 x 2205/2505	1232 x 2216/2516	1016	2104/2404

FINISHED WALL = FW	SOLID WALL		STUD WALL	
	BRICKS = Br		STUDWORK = S	
100	--	50 with two plasterboard layers	75 with one plasterboard layer	
108	80	--	--	
125	100	75 with two plasterboard layers	100 with one plasterboard layer	
150	120	100 with two plasterboard layers		

NOTES


- ▶ Supplied as standard with 3 hinges. Max. door panel weight with 3 hinges: 50 kg.
- ▶ Available upon request with 4 hinges. Max. door panel weight with 4 hinges: 65 kg.
- ▶ Available finishes: Primer-coated, Champagne, Bronze, Tobacco and White RAL 9010.
- ▶ Install at finished floor level.

ACCESSORIES

- ▶ Self-closing door hinge

ECLISSE 40 SINGLE

SIZES - FRAME WITHOUT HEADER - **PUSH DOOR - PULL DOOR**

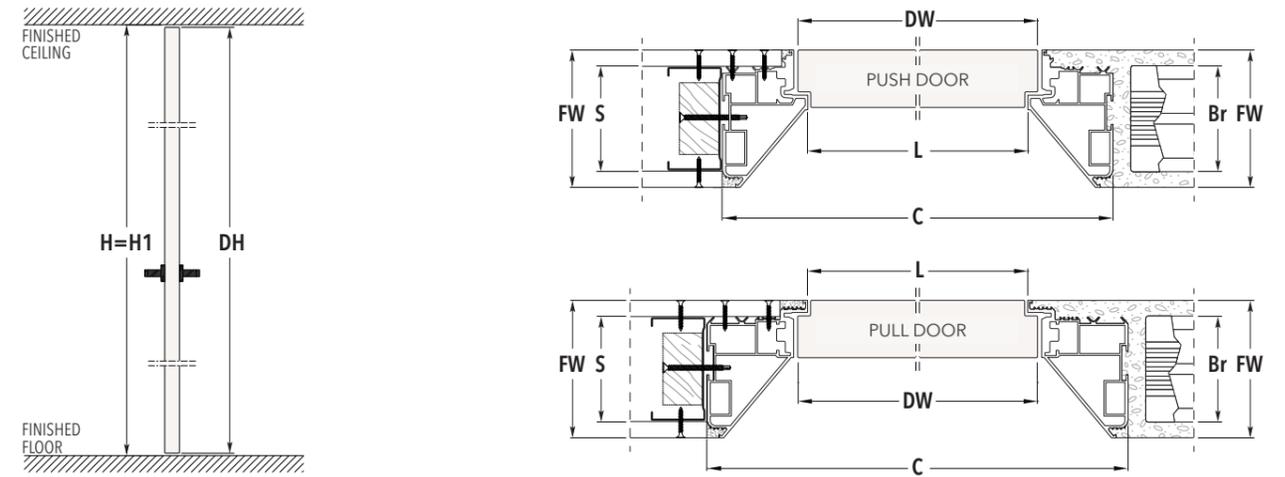

PASSAGE SIZE L x H	FINISHED WALL 100		FINISHED WALL 108		DOOR PANEL Thk. 45 mm	
	OVERALL DIMENSIONS C x H1		OVERALL DIMENSIONS C x H1		DW	DH
	PUSH DOOR	PULL DOOR	PUSH DOOR	PULL DOOR		
600 x 2700	726 x 2700	750 x 2700	734 x 2700	758 x 2700	616	2693
700 x 2700	826 x 2700	850 x 2700	834 x 2700	858 x 2700	716	2693
800 x 2700	926 x 2700	950 x 2700	934 x 2700	958 x 2700	816	2693
900 x 2700	1026 x 2700	1050 x 2700	1034 x 2700	1058 x 2700	916	2693
1000 x 2700	1126 x 2700	1150 x 2700	1134 x 2700	1158 x 2700	1016	2693

PASSAGE SIZE L x H	FINISHED WALL 125		FINISHED WALL 150		DOOR PANEL Thk. 45 mm	
	OVERALL DIMENSIONS C x H1		OVERALL DIMENSIONS C x H1		DW	DH
	PUSH DOOR	PULL DOOR	PUSH DOOR	PULL DOOR		
600 x 2700	766 x 2700	790 x 2700	810 x 2700	832 x 2700	616	2693
700 x 2700	866 x 2700	890 x 2700	910 x 2700	932 x 2700	716	2693
800 x 2700	966 x 2700	990 x 2700	1010 x 2700	1032 x 2700	816	2693
900 x 2700	1066 x 2700	1090 x 2700	1110 x 2700	1132 x 2700	916	2693
1000 x 2700	1166 x 2700	1190 x 2700	1210 x 2700	1232 x 2700	1016	2693

FINISHED WALL = FW	SOLID WALL		STUD WALL	
	BRICKS = Br		STUDWORK = S	
100	--	50 with two plasterboard layers	75 with one plasterboard layer	
108	80	--	--	
125	100	75 with two plasterboard layers	100 with one plasterboard layer	
150	120	100 with two plasterboard layers		

NOTES

- ▶ Supplied as standard with 3 hinges. Max. door panel weight with 3 hinges: 50 kg.
- ▶ Available upon request with 4 hinges. Max. door panel weight with 4 hinges: 65 kg.
- ▶ Available finishes: Primer-coated, Champagne, Bronze, Tobacco and White RAL 9010.
- ▶ Install at finished floor level.

ACCESSORIES


- ▶ Self-closing door hinge

ECLISSE 40 DOUBLE


OPENINGS




LEFT PUSH DOOR - FIXED RIGHT DOOR

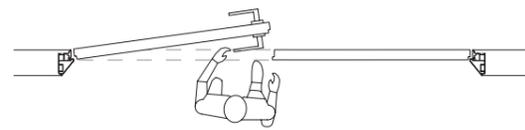


LEFT PULL DOOR - FIXED RIGHT DOOR

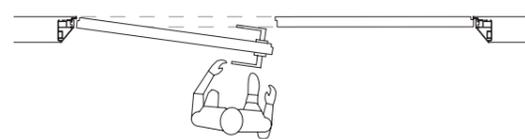


RIGHT PUSH DOOR - FIXED LEFT DOOR

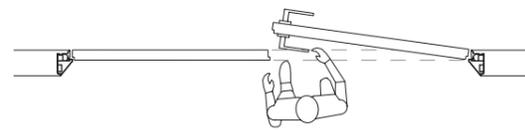


RIGHT PULL DOOR - FIXED LEFT DOOR

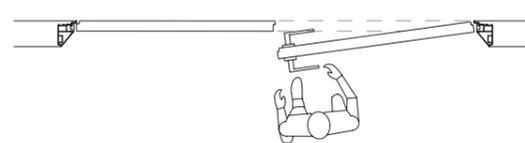

ECLISSE 40 DOUBLE is available only with header. The fixed door is kept closed with a latch (supplied with the door panel).

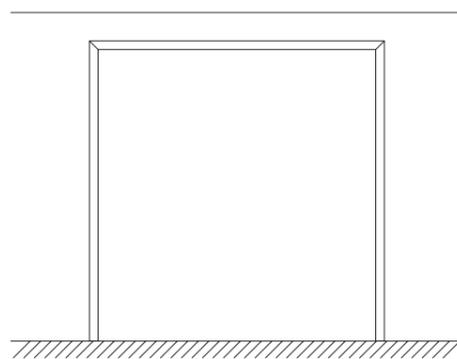

With header

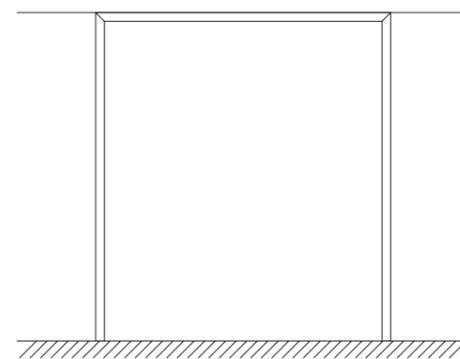

With header flush to ceiling

ECLISSE 40 DOUBLE


APPLICATIONS

The frame fits both stud and solid wall.
For solid wall 6 clamps are cemented in the special spaces created in the wall.
For stud wall the frame is fixed with screws to the wood or metal structure through the existing holes.


FIXED LEFT DOOR

RIGHT PUSH DOOR OR PULL DOOR


Frame on solid wall - Finished wall thickness 108/125/150 mm

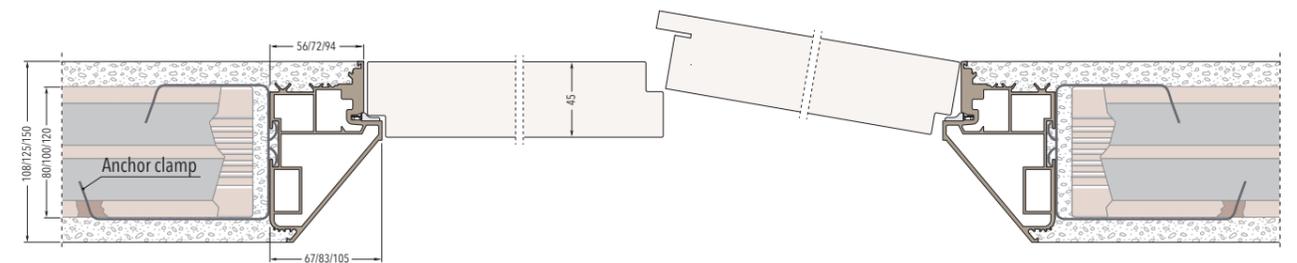


Frame on solid wall - Finished wall thickness 108/125/150 mm

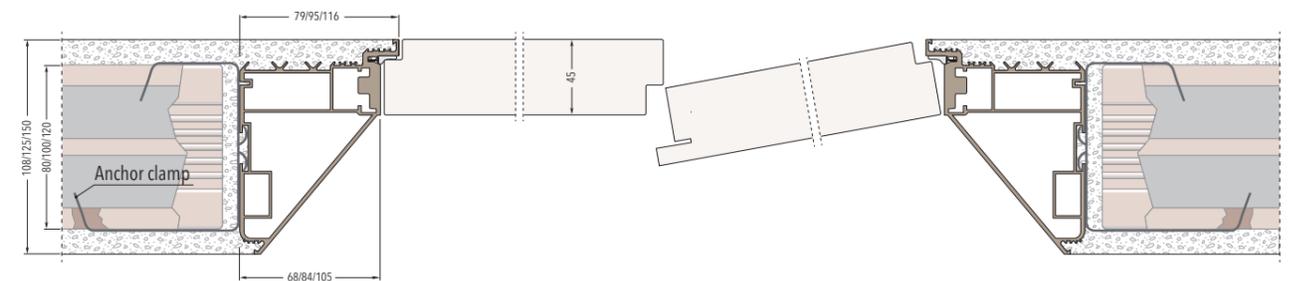

Frame on stud wall with one plasterboard layer - Finished wall thickness 100/125 mm

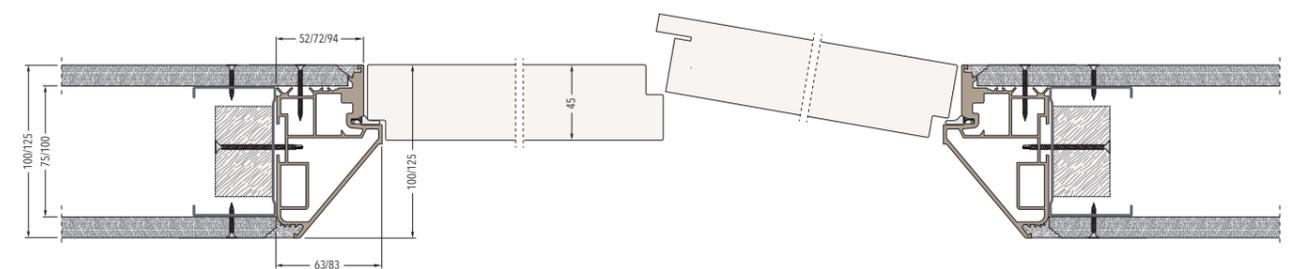


Frame on stud wall with two plasterboard layers - Finished wall thickness 100/125/150 mm

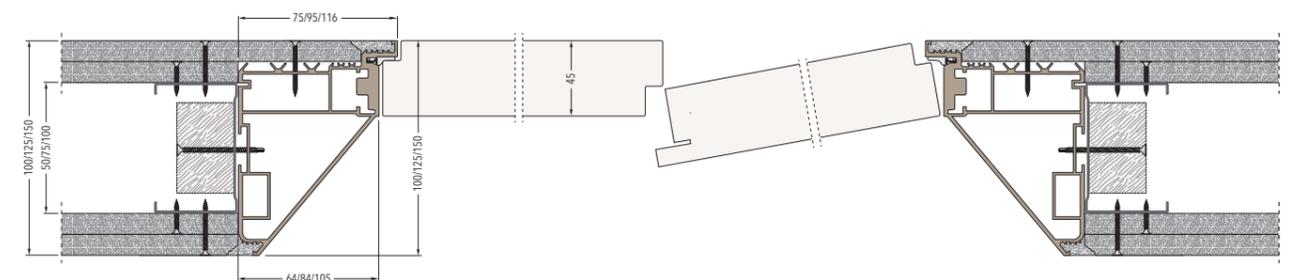

ECLISSE 40 DOUBLE

SIZES - FRAME WITH HEADER - **PUSH DOOR**

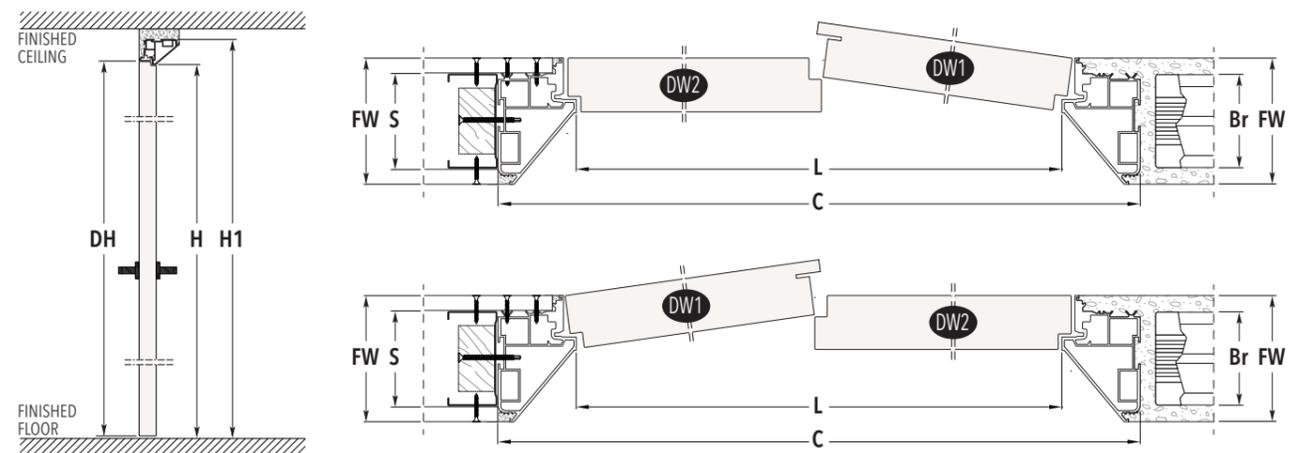

PASSAGE SIZE L x H	FINISHED WALL 100		FINISHED WALL 108		
	OVERALL DIMENSIONS C x H1		OVERALL DIMENSIONS C x H1		
	PUSH DOOR		DW1	DW2	DH
1200 x 2100/2400	1326 x 2163/2463	1334 x 2167/2467	606	616	2104/2404
1400 x 2100/2400	1526 x 2163/2463	1534 x 2167/2467	706	716	2104/2404
1600 x 2100/2400	1726 x 2163/2463	1734 x 2167/2467	806	816	2104/2404
1800 x 2100/2400	1926 x 2163/2463	1934 x 2167/2467	906	916	2104/2404
2000 x 2100/2400	2126 x 2163/2463	2134 x 2167/2467	1006	1016	2104/2404

PASSAGE SIZE L x H	FINISHED WALL 125		FINISHED WALL 150		
	OVERALL DIMENSIONS C x H1		OVERALL DIMENSIONS C x H1		
	PUSH DOOR		DW1	DW2	DH
1200 x 2100/2400	1366 x 2183/2483	1410 x 2205/2505	606	616	2104/2404
1400 x 2100/2400	1566 x 2183/2483	1610 x 2205/2505	706	716	2104/2404
1600 x 2100/2400	1766 x 2183/2483	1810 x 2205/2505	806	816	2104/2404
1800 x 2100/2400	1966 x 2183/2483	2010 x 2205/2505	906	916	2104/2404
2000 x 2100/2400	2166 x 2183/2483	2210 x 2205/2505	1006	1016	2104/2404

FINISHED WALL = FW	SOLID WALL		STUD WALL	
	BRICKS = Br		STUDWORK = S	
100	--	50 with two plasterboard layers	75 with one plasterboard layer	
108	80	--	--	
125	100	75 with two plasterboard layers	100 with one plasterboard layer	
150	120	100 with two plasterboard layers		

NOTES


- ▶ Supplied as standard with 3 hinges. Max. door panel weight with 3 hinges: 50 kg.
- ▶ Available upon request with 4 hinges. Max. door panel weight with 4 hinges: 65 kg.
- ▶ Available finishes: Primer-coated, Champagne, Bronze, Tobacco and White RAL 9010.
- ▶ Install at finished floor level.

ACCESSORIES

- ▶ Self-closing door hinge

ECLISSE 40 DOUBLE

SIZES - FRAME WITH HEADER - **PULL DOOR**

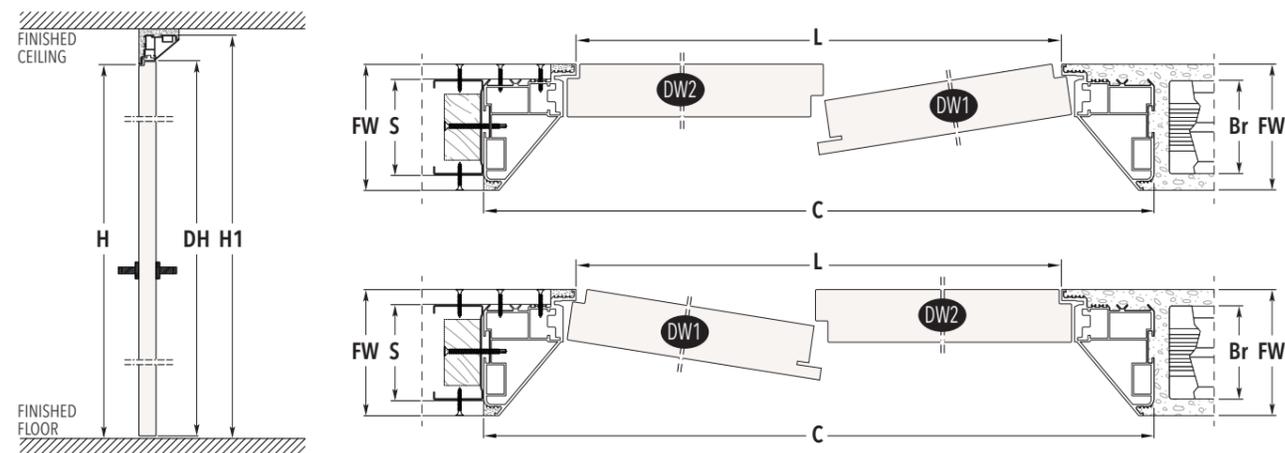

PASSAGE SIZE L x H	FINISHED WALL 100		FINISHED WALL 108		
	OVERALL DIMENSIONS C x H1		OVERALL DIMENSIONS C x H1		
	PULL DOOR		DW1	DW2	DH
1200 x 2100/2400	1350 x 2175/2475	1358 x 2179/2479	606	616	2104/2404
1400 x 2100/2400	1550 x 2175/2475	1558 x 2179/2479	706	716	2104/2404
1600 x 2100/2400	1750 x 2175/2475	1758 x 2179/2479	806	816	2104/2404
1800 x 2100/2400	1950 x 2175/2475	1958 x 2179/2479	906	916	2104/2404
2000 x 2100/2400	2150 x 2175/2475	2158 x 2179/2479	1006	1016	2104/2404

PASSAGE SIZE L x H	FINISHED WALL 125		FINISHED WALL 150		
	OVERALL DIMENSIONS C x H1		OVERALL DIMENSIONS C x H1		
	PULL DOOR		DW1	DW2	DH
1200 x 2100/2400	1390 x 2195/2495	1432 x 2216/2516	606	616	2104/2404
1400 x 2100/2400	1590 x 2195/2495	1632 x 2216/2516	706	716	2104/2404
1600 x 2100/2400	1790 x 2195/2495	1832 x 2216/2516	806	816	2104/2404
1800 x 2100/2400	1990 x 2195/2495	2032 x 2216/2516	906	916	2104/2404
2000 x 2100/2400	2190 x 2195/2495	2232 x 2216/2516	1006	1016	2104/2404

FINISHED WALL = FW	SOLID WALL		STUD WALL	
	BRICKS = Br		STUDWORK = S	
100	--	50 with two plasterboard layers	75 with one plasterboard layer	
108	80	--	--	
125	100	75 with two plasterboard layers	100 with one plasterboard layer	
150	120	100 with two plasterboard layers		

NOTES

- ▶ Supplied as standard with 3 hinges. Max. door panel weight with 3 hinges: 50 kg.
- ▶ Available upon request with 4 hinges. Max. door panel weight with 4 hinges: 65 kg.
- ▶ Available finishes: Primer-coated, Champagne, Bronze, Tobacco and White RAL 9010.
- ▶ Install at finished floor level.

ACCESSORIES

- ▶ Self-closing door hinge

BASEBOARDS



A passion for detail has been a distinctive feature of the work at ECLISSE since the beginning. This is why our product range includes three different baseboards, which are able to harmonise with a wide range of furnishing styles.

ECLISSE SYNTESIS® BASEBOARD is a profile solution which is installed flush with the wall and is notable for his minimalism, designed to harmonise elegantly with the furnishings of the room.

ECLISSE DELTA is the innovative baseboard, easy to install and with a modern geometric design that appears to change depending on the viewing angle. There is nothing like it on the market.

ECLISSE DELTA

TECHNICAL DETAILS



ECLISSE DELTA is the new aluminium baseboard which redefines the concept. Its appearance along the length of the wall is understated yet unmistakable. Like a good theatrical production, this baseboard presents a frontal illusion of a flush effect which emphasises the nature of the wall. But the true magic is revealed when the viewing angle is changed: the viewer is pleasantly surprised by the unexpected slant which divides up the space and imbues the environment with a unique expressive force.

The pattern of the three-dimensional terminal pieces is also very novel and lends them an unmistakable, unique appearance.

Aesthetics

With its special viewing angle feature, ECLISSE DELTA divides the space up with well-defined, geometric lines. The baseboard is the perfect foil for a modern, avant-garde style, compatible with ECLISSE SYNTESIS® FLUSH COLLECTION and ECLISSE 40 COLLECTION.

Technical features and finishes

ECLISSE DELTA is available in two different heights (50 and 70 mm) to satisfy different furnishing requirements. It is tapered from 13.5 mm to 1.6 mm, which is the same for both heights. Manufactured in aluminium, it is available in 4 painted finishes and 1 primer-coated finish, ready to be painted. The special tapered terminal pieces highlight the characteristic inclination of the skirting board near the doorway.


Application

Upon completion of the installation, ECLISSE DELTA can be fitted easily and without any special procedures simply using only silicone.


APPLICATIONS




The aluminium profile is supplied in 2000 mm long bars (height 50 mm)



The aluminium profile is supplied in 2000 mm long bars (height 70 mm)

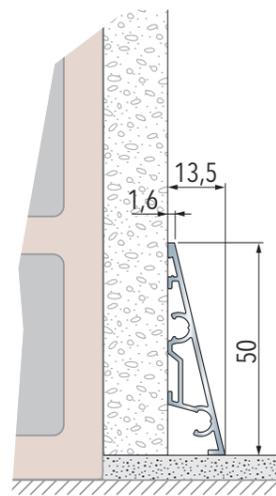

Baseboard installed on solid wall

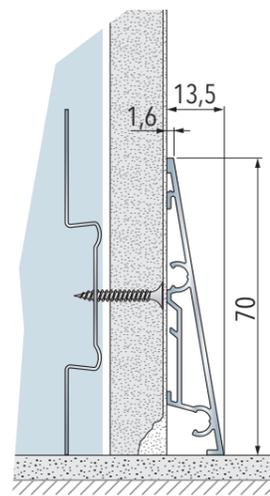


Baseboard installed on stud wall (one layer of plasterboard)

Dimensions are given in mm

ECLISSE DELTA

TERMINAL ELEMENTS AND CONNECTING JOINTS - FINISHES

TERMINAL ELEMENTS (2 right - 2 left)

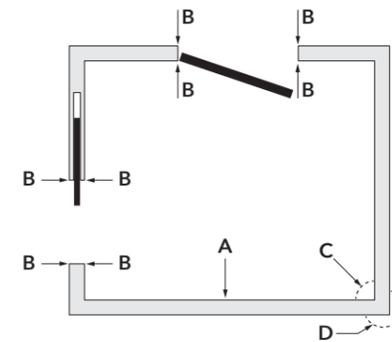

TAPERED TERMINAL ELEMENT	STRAIGHT TERMINAL ELEMENT
PACK OF 4 ITEMS (see item B in the figure)	PACK OF 4 ITEMS (see item B in the figure)

JOINTS FOR CONNECTING PROFILES

LINEAR JOINTS*	JOINTS FOR INTERNAL CORNER	JOINTS FOR EXTERNAL CORNER
PACK OF 40 JOINTS (see item A in the figure)	PACK FOR 2 CORNERS (8 elements, 4 each) (see item C in the figure)	PACK FOR 2 CORNERS (8 elements, 4 each) (see item D in the figure)

FINISHES

CHAMPAGNE	BRONZE	TOBACCO
WHITE RAL 9010	PRIMER-COATED	

NOTES

- * Joints: 2 connectors are needed for each profile to be connected.
- Adhesive sealant: for solid walls use one packet per 25 linear metres.

ECLISSE SYNTESIS® BASEBOARD

TECHNICAL DETAILS



The ECLISSE SYNTESIS® BASEBOARD is an innovative idea to decorate house spaces in an elegant, minimal, modern way. Unlike traditional skirting boards, this profile allows to install a perfectly flush-to-the-wall skirting that runs along the wall without protruding. This way, furniture can be placed adherent to the wall, without remodelling the baseboard or leaving annoying gaps between the furniture and the wall.

The principle is simple: it is simply necessary to create a hollow for the baseboard by placing the special aluminium profiles while creating the wall structure. The ultimate expression of the ECLISSE SYNTESIS® FLUSH concept.

Aesthetics

To fix the profiles to a solid wall a structural sealing adhesive is needed. In the case of stud walls the profiles, specifically perforated, are to be fixed with screws.


Technical features and finishes

The aluminium profiles have a triple-chamber structure that assures robustness and allows a perfect union between two different bars thanks to the special connecting joints.

Application

The profiles fit with the insertion of standard baseboards (max. height: 58 mm). For higher baseboards, simply place the profiles higher than the finished floor level.

APPLICATIONS

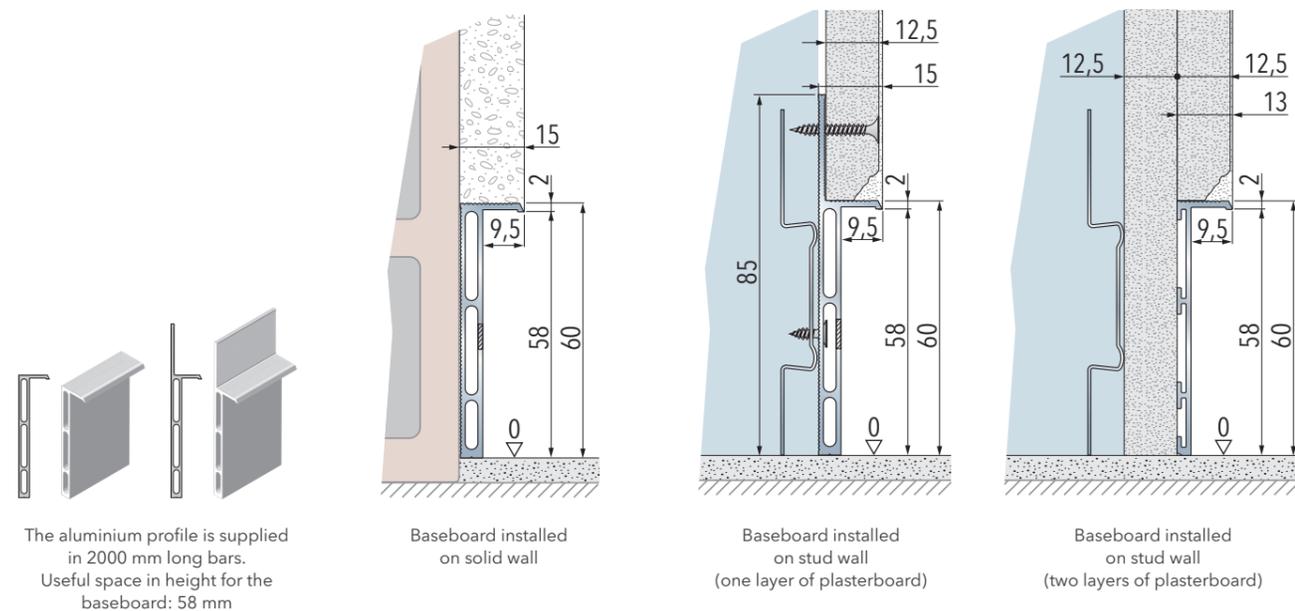

ECLISSE SYNTESIS® BASEBOARD

TERMINAL ELEMENTS AND CONNECTING JOINTS


TERMINAL ELEMENTS (different versions for solid wall and stud wall)



ALUMINIUM END PROFILES FOR SYNTESIS® FLUSH POCKET DOORS

ALUMINIUM END PROFILES FOR SYNTESIS® FLUSH HINGED DOORS

JOINTS FOR CONNECTING PROFILES

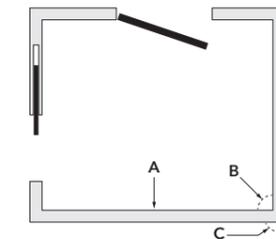


LINEAR JOINT*

JOINTS FOR INTERNAL CORNER

JOINTS FOR EXTERNAL CORNER

JOINT FOR STEPS*

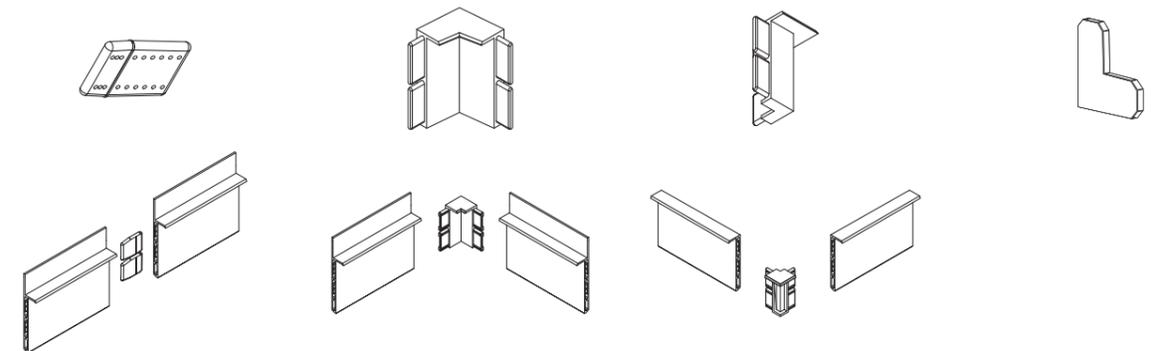

PACK OF 50 JOINTS (see item A in the figure)

PACK OF 10 JOINTS (see item B in the figure)

PACK OF 10 JOINTS (see item C in the figure)

PACK OF 10 JOINTS

NOTES

- * Joints: 2 connectors are needed for each profile to be connected.
- Terminal profiles are needed for ECLISSE SYNTESIS® FLUSH doors, ECLISSE 40 doors and ECLISSE SYNTESIS® AREO.
- Adhesive sealant: for solid walls use one packet per 25 linear metres.


ECLISSE SYNTESIS® BASEBOARD

LEDs - FINISHES


APPLICATION OF LED LIGHTING (LED strip not provided)

ECLISSE SYNTESIS® BASEBOARD can function as a step marker if backlit with LEDs.

- The baseboard (skirting) must be milled on the top of the rear side: 25 mm from the top, 4 mm in depth (see picture).
- Fix the LED strip on the profile in the space left by the milling.
- The baseboard height must be reduced by 2 mm to allow the light to pass through.

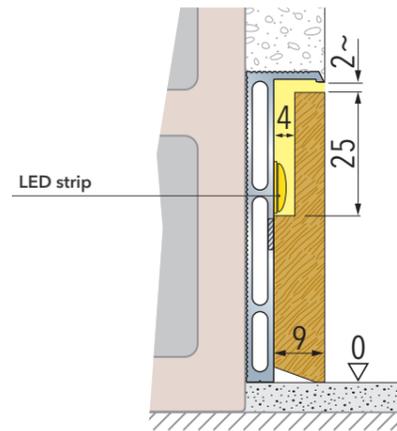

FINISHES



PRIMER-COATED



LACQUERED WHITE RAL 9010



LACQUERED IN OTHER RAL COLOURS



NATURAL ASH



WHITE ASH



OPEN PORE LACQUERED WHITE RAL 9010 ASH



NATURAL OAK

ECLISSE DOORS



ECLISSE offers a range of doors with different finishes, both for sliding and hinged versions, as well as various solutions for baseboards flush with the wall. The door range includes finishes in different materials, from primer-coated versions ready to be customized with paint or wallpaper, to trendy wood veneers and the most versatile lacquered or glass doors. From design to technical proposals, choose the most suitable for you.

WOODEN DOORS - ECLISSE CLASSIC

DOOR PANELS - JAMBS



DOOR PANELS

ECLISSE offers a range of door panels for flat, sectional or curved doors. Besides helping to prolong service life, prevent loss of shape and protect against all other environmental stresses, the materials also lend the items elegance, sophistication and absolute precision.

JAMBS AND ARCHITRAVES

The door panels can be completed with ECLISSE jambs and architraves. These are available in raw Tanganyika walnut wood or laminated.

WOODEN DOORS - ECLISSE CLASSIC

DOOR PANELS - JAMBS

JAMBS AND ARCHITRAVES FOR SLIDING POCKET DOORS

		WALL THICKNESS			
		90	100/108	125	150
A	X	19	19	32	43.5
	Y	50	50	50	50
B	X	19	19	32	43.5
	Y	25	25	25	25
C	X	90	100/108	125	150
	Y	25	25	25	25

Dimensions are given in mm

EXAMPLE OF INSTALLATION OF THE L-SHAPED TELESCOPIC ARCHITRAVES

L-shaped interlocking telescopic architraves (70x27 mm)

Normal installation

Installation with adjustable architraves

Jambs

Telescopic architraves

other thickness

FINISHES - ECLISSE SINGLE - ECLISSE DOUBLE - ECLISSE LUCE - ECLISSE EWOLUTO®

LAMINATE WHITE RAL 9010

LAMINATE OAK

LAMINATE NATURAL WALNUT

RAW TANGANYIKA

FINISHES - ECLISSE TELESCOPIC - ECLISSE UNILATERAL - ECLISSE NOVANTA

LAMINATE WHITE RAL 9010

RAW TANGANYIKA

FINISHES - ECLISSE CIRCULAR

MAHOGANY

OAK

BEECH

CHERRY

DARK WALNUT

WENGÉ

RAW TANGANYIKA

GLASS DOORS - ECLISSE CLASSIC

FINISHES



Standard handle made of artistic fused glass for sliding glass doors.



The door panel for models with jambs can be chosen with or without decorations. If the glass is transparent you can see clearly through the door. In addition, if the glass is extra-clear, it means that the panel is practically colorless and neutral. Whereas, the glass always takes on a slight greenish color due to its composition and the presence of iron oxide.

FINISHES



GLASS DOORS - ECLISSE CLASSIC

JAMBS AND ARCHITRAVES



The jambs and architraves for glass doors are available in raw Tanganyika walnut and laminate white RAL 9010. Header jambs are wider than those for wooden doors and the stop jamb seat is adapted to the thickness of the glass door.


FINISHES



LAMINATE WHITE RAL 9010

RAW TANGANYIKA

JAMBS AND ARCHITRAVES FOR SLIDING POCKET GLASS DOORS

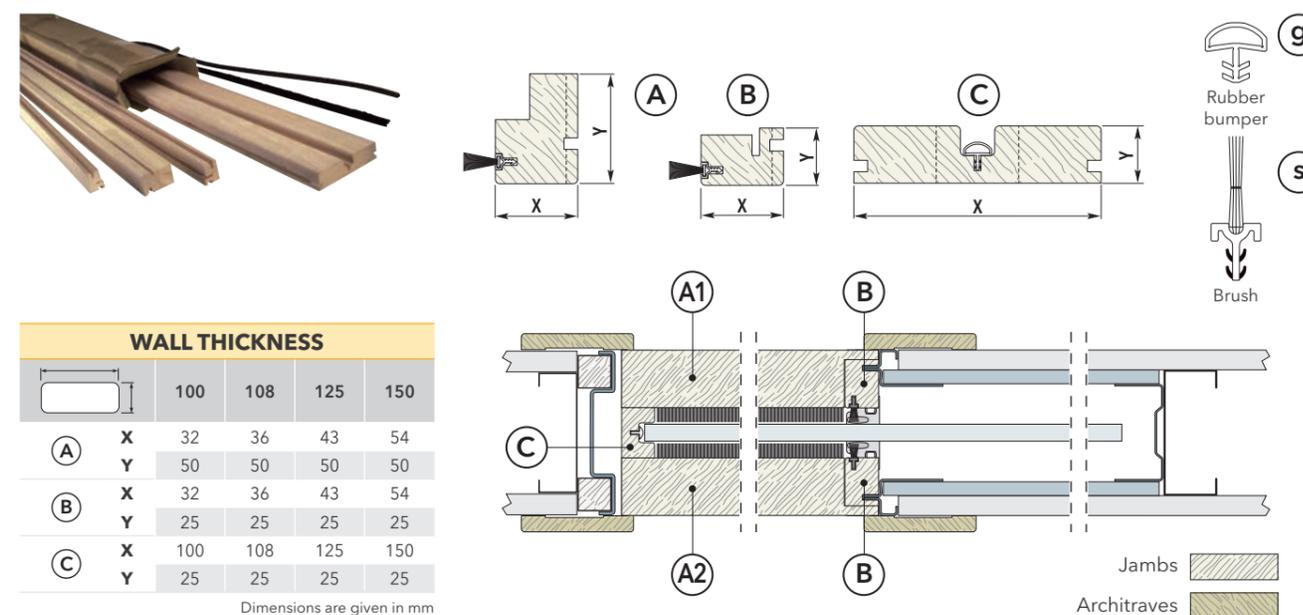


		WALL THICKNESS			
		100	108	125	150
A	X	32	36	43	54
	Y	50	50	50	50
B	X	32	36	43	54
	Y	25	25	25	25
C	X	100	108	125	150
	Y	25	25	25	25

Dimensions are given in mm

Jambs
Architraves

GLASS DOORS - ECLISSE CLASSIC

Sandblasted decoration on transparent, satin and transparent smoked bases. Transparent decoration on a sandblasted smoked base.

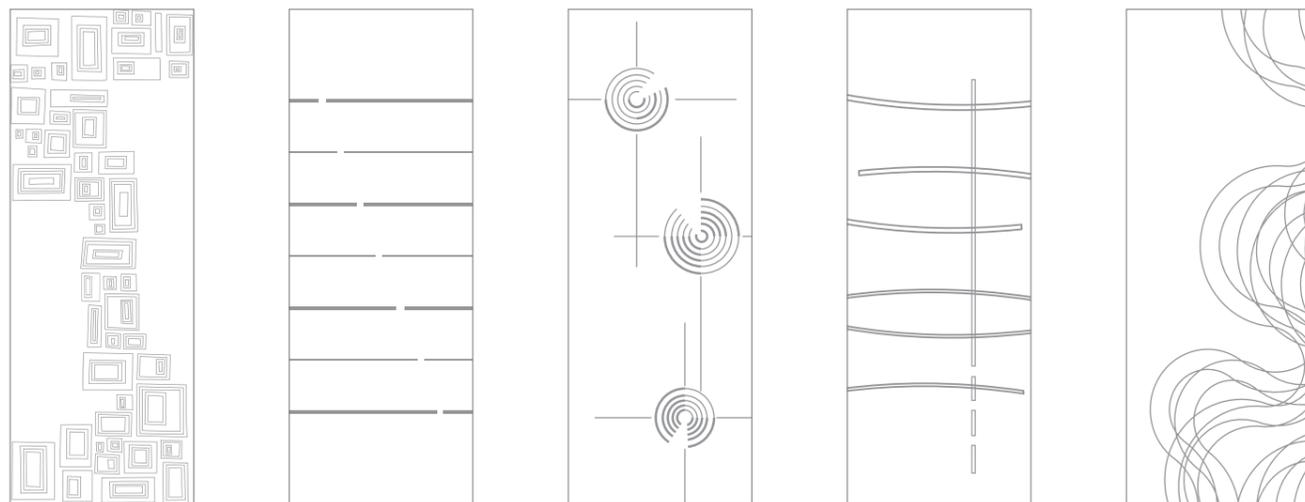

MIRAGE

INTERRUZIONE

PULL

REGOLA

FIBRE


OPALE

CANNE AL VENTO


BRISTOL

ROUEN


TREVIRI

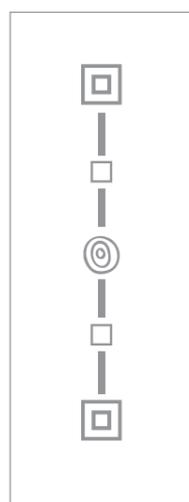


GEO

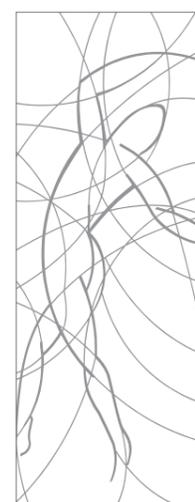

HAYLIN

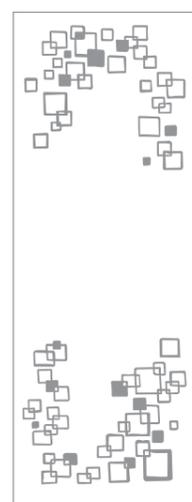


RIFLESSI

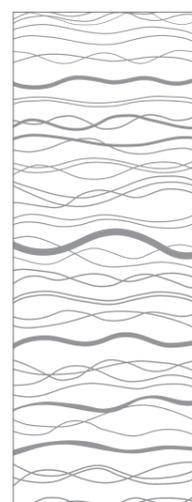

ACQUA



GREEN

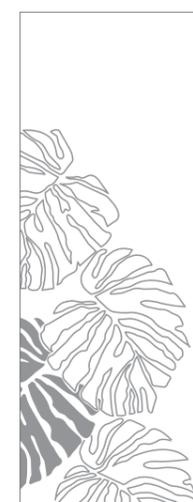


DANZICA




RONDA



REM

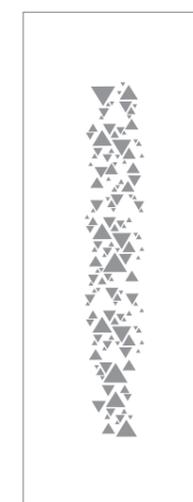

RAIPUR

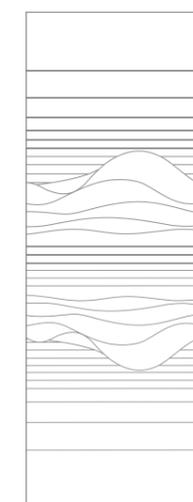

FIORDO

GLASS DOORS - ECLISSE CLASSIC

Sandblasted decoration on transparent, satin and transparent smoked bases. Transparent decoration on a sandblasted smoked base.




OPALE

CANNE AL VENTO

BRISTOL

ROUEN

TREVIRI

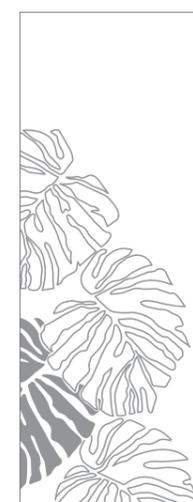


DANZICA




RONDA



REM

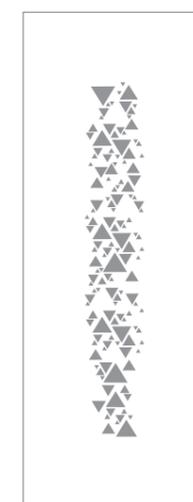

RAIPUR

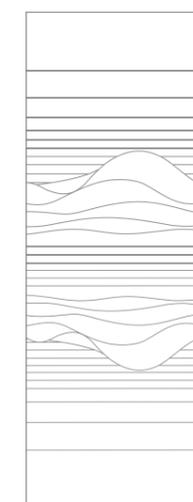


FIORDO

WOODEN DOORS - ECLISSE SYNTESIS® FLUSH

SLIDING - SWING - PRIMER-COATED - LACQUERED - WOOD VENEERS



The primer-coated door panels, either sliding or hinged, are ready to be finished with wallpaper, varnish or paint of the same colour as the wall.

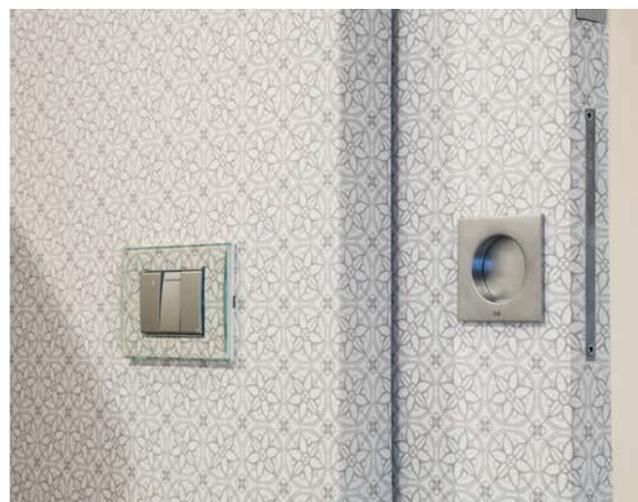

ECLISSE SYNTESIS® FLUSH COLLECTION solutions are perfect for hiding walk-in closets and utility rooms.



WOODEN DOORS - ECLISSE SYNTESIS® FLUSH

SLIDING - SWING - PRIMER-COATED - LACQUERED - WOOD VENEERS




The door panels for sliding and swing models of the ECLISSE SYNTESIS® FLUSH COLLECTION are available in the following finishes:

- primer-coated untreated door panels ready to be painted or lacquered
- lacquered door panels in different RAL colours
- door panels in wooden veneers such as natural oak, natural ash, white ash, open pore lacquered white RAL 9010 ash

Door panels, both sliding and hinged have a standard tensioning rod starting from H = 2000 mm.

FINISHES



PRIMER-COATED



LACQUERED WHITE RAL 9010



LACQUERED IN OTHER RAL COLOURS



NATURAL ASH



WHITE ASH



OPEN PORE LACQUERED WHITE RAL 9010 ASH



NATURAL OAK

GLASS DOORS - ECLISSE SYNTESIS® FLUSH

SLIDING - GLASS DOOR WITH STANDARD REDUCED VEIL



Standard handle made of artistic fused glass for sliding glass doors.



The ECLISSE glass doors in the finishes shown below, with or without decorations, are supplied with a special aluminium veil with a minimalist design. Thanks to its low height (30 mm) it is barely visible. VITRO is the glass door adapter that allows a glass door to fit into a model of the ECLISSE SYNTESIS® FLUSH COLLECTION.

FINISHES



TRANSPARENT TRANSPARENT EXTRA CLEAR SATIN SATIN EXTRA CLEAR



TRANSPARENT SMOKED SANDBLASTED SMOKED

GLASS DOORS - ECLISSE SYNTESIS® FLUSH

SWING - ECLISSE SYNTESIS® BATTENTE GLASS



The ECLISSE SYNTESIS® BATTENTE GLASS door panel, available only without decorations, is supported by a vertical anodised aluminium profile, while the hinges, completely hidden, ensure stability even in the case of large doors. The exclusive design of the ECLISSE profiles ensures a perfect integration of the frame into the wall.

FINISHES



TRANSPARENT SATIN

GLASS ALUMINIUM DOORS - ECLISSE SYNTESIS®

SLIDING - SINGLE-GLAZED GLASS DOOR



In the single-glazed sliding door version, the panel is placed in the centre of the aluminium profile.

DOOR PANEL FRAME	GLASS FINISHES	
CHAMPAGNE	BRONZE	SMOKED
BRONZE	SATIN BRONZE	SANDBLASTED SMOKED
TOBACCO	REFLEX BRONZE	REFLEX SMOKED
WHITE RAL 9010	SATIN EXTRA CLEAR	DOUBLE-SIDE MIRRORED
ALUMINIUM	TRANSPARENT EXTRA CLEAR	

HANDLES (matching the frame colour)



WITHOUT CLOSING ELEMENT (standard)

WITH THUMB TURN (only for single door)

GLASS ALUMINIUM DOORS - ECLISSE SYNTESIS®

SLIDING - DOUBLE-GLAZED GLASS DOOR



In the double-glazed sliding door version, the aluminium profile is enclosed between two panels of glass.

DOOR PANEL FRAME	GLASS FINISHES	
CHAMPAGNE	BRONZE	SMOKED
BRONZE	SATIN BRONZE	SANDBLASTED SMOKED
TOBACCO	REFLEX BRONZE	REFLEX SMOKED
WHITE RAL 9010	SATIN EXTRA CLEAR	DOUBLE-SIDE MIRRORED
ALUMINIUM		

HANDLES (matching the frame colour)



WITHOUT CLOSING ELEMENT (standard)


WITH THUMB TURN (only for single door)

GLASS ALUMINIUM DOORS - ECLISSE SYNTESIS®

SWING - SINGLE-GLAZED GLASS DOOR



In the single-glazed hinged door version the glass panel is on the flush-to-wall side, while the aluminium profile is visible on the other side.

DOOR PANEL FRAME	GLASS FINISHES		
 CHAMPAGNE	 BRONZE	 SMOKED	
 BRONZE	 SATIN BRONZE	 SANDBLASTED SMOKED	
 TOBACCO	 REFLEX BRONZE	 REFLEX SMOKED	
 WHITE RAL 9010	 SATIN EXTRA CLEAR	 MIRRORED*	
 ALUMINIUM			

NOTES


- For the list of compatible handles, see the HANDLES section.
- * In the single-glazed hinged door version, the mirror is on the side which is flush with the wall, and the back of the door is painted black.

GLASS ALUMINIUM DOORS - ECLISSE SYNTESIS®

SWING - DOUBLE-GLAZED GLASS DOOR



In the double-glazed hinged door version, the aluminium profile is enclosed between two panels of glass.

DOOR PANEL FRAME	GLASS FINISHES		
 CHAMPAGNE	 BRONZE	 SMOKED	
 BRONZE	 SATIN BRONZE	 SANDBLASTED SMOKED	
 TOBACCO	 REFLEX BRONZE	 REFLEX SMOKED	
 WHITE RAL 9010	 SATIN EXTRA CLEAR	 DOUBLE-SIDE MIRRORED	
 ALUMINIUM			

NOTES

- For the list of compatible handles, see the HANDLES section.

WOODEN DOORS - ECLISSE 40

SWING - PRIMER-COATED - LACQUERED - WOOD VENEERS



The special inclination of the frame allows it to play on light and shadows, creating a sense of depth and a stunning never-before-seen look.



The choice of the door panel completes this play, adapting to the best the final result to a wide variety of interiors.

WOODEN DOORS - ECLISSE 40

SWING - PRIMER-COATED - LACQUERED - WOOD VENEERS




The door panels for the ECLISSE 40 COLLECTION models are available in the following finishes:

- primer-coated untreated door panels ready to be painted or lacquered
- lacquered door panels in different RAL colours
- door panels in wooden veneers such as natural oak, natural ash, white ash, open pore lacquered white RAL 9010 ash

Door panels have a standard tensioning rod starting from H = 2000 mm.

FINISHES



PRIMER-COATED



LACQUERED WHITE RAL 9010



LACQUERED IN OTHER RAL COLOURS



NATURAL ASH



WHITE ASH



OPEN PORE LACQUERED WHITE RAL 9010 ASH



NATURAL OAK


GLASS ALUMINIUM DOORS - ECLISSE 40

SWING - DOUBLE-GLAZED GLASS DOOR



In the double-glazed hinged door version, the aluminium profile is enclosed between two panels of glass.

HANDLES

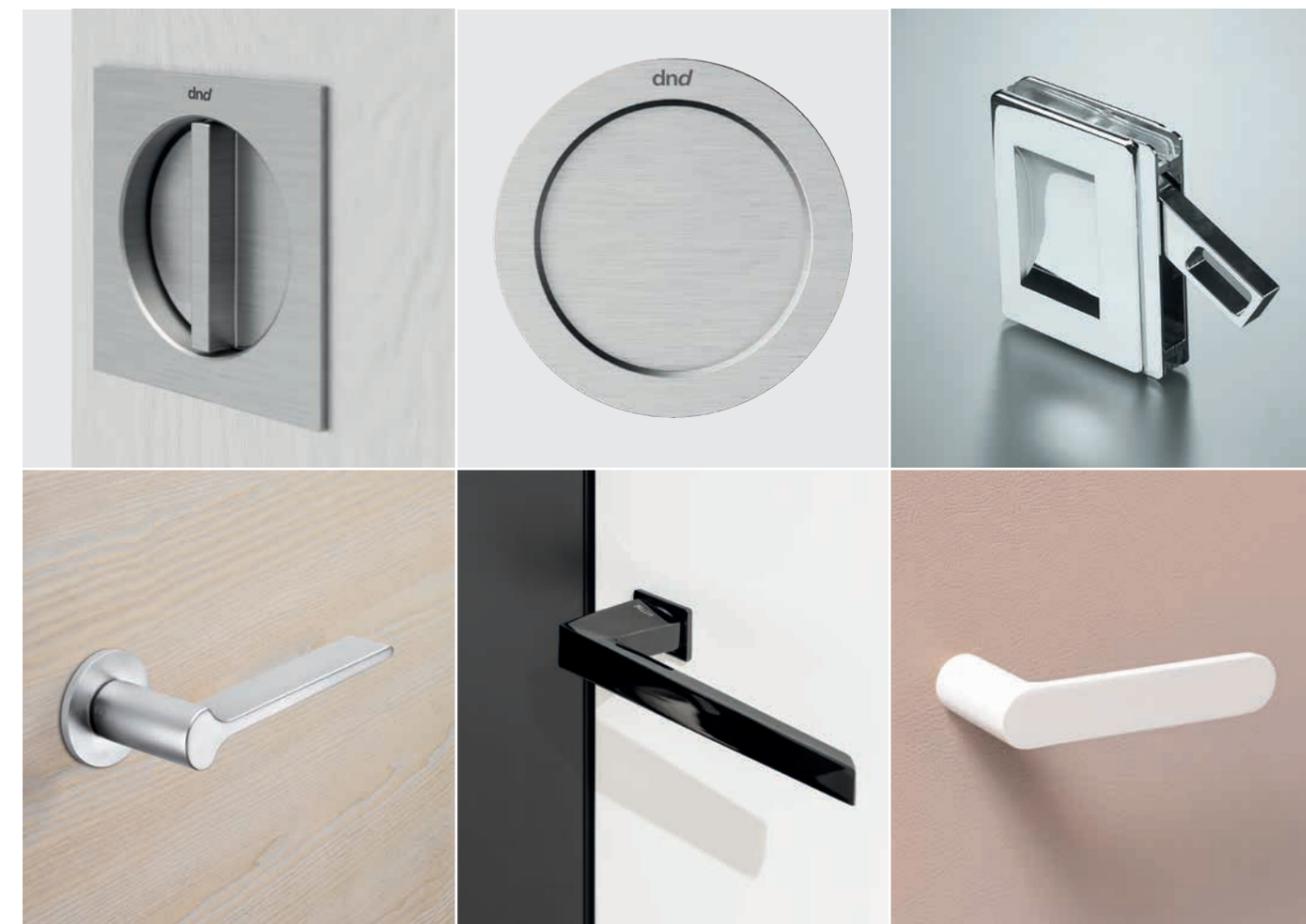

ECLISSE offers a range of handles and lock kits for sliding pocket doors and for hinged doors, both for glass and wooden panels. The ECLISSE lock kits are equipped as standard with integrated pull lever, to ease the gripping of the door and give a neater and more elegant appearance, without the finger pull hole above the plate. In double door models the absence of the protruding finger pull thickness allows the edges of the two sliding door panels to join perfectly, preventing any light from passing between the closed door panels. The lock kits are available in different finishes, to match any type of door.

DOOR PANEL FRAME

GLASS FINISHES




CHAMPAGNE



BRONZE



TOBACCO



WHITE RAL 9010



ALUMINIUM



BRONZE



SATIN BRONZE



REFLEX BRONZE



SATIN EXTRA CLEAR




SMOKED



SANDBLASTED SMOKED



REFLEX SMOKED



DOUBLE-SIDE MIRRORED

NOTES

► For the list of compatible handles, see the HANDLES section.

HANDLES

FOR WOODEN DOORS - **SLIDING**

EASY - ROUND

KIT WITHOUT LOCK




PAINTED POLISHED BRASS

ANTIQUÉ SMOKED BRASS

POLISHED CHROME

SATIN CHROME

KIT WITH LOCK AND KEYHOLE

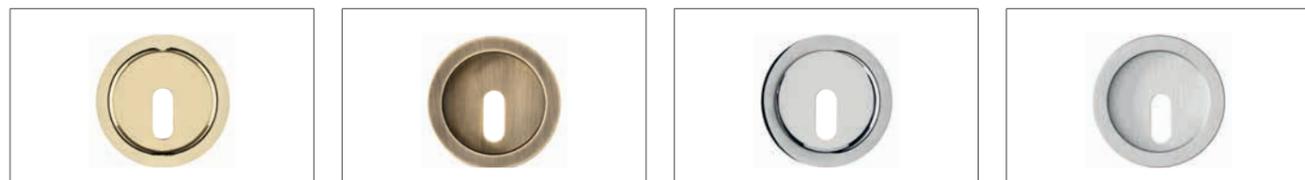

PAINTED POLISHED BRASS

ANTIQUÉ SMOKED BRASS

POLISHED CHROME

SATIN CHROME

KIT WITH LOCK AND THUMB TURN



PAINTED POLISHED BRASS

ANTIQUÉ SMOKED BRASS

POLISHED CHROME

SATIN CHROME

KIT WITH CYLINDER LOCK



PAINTED POLISHED BRASS

ANTIQUÉ SMOKED BRASS

POLISHED CHROME


SATIN CHROME

HANDLES

FOR WOODEN DOORS - **SLIDING**

EASY - SQUARE

KIT WITHOUT LOCK

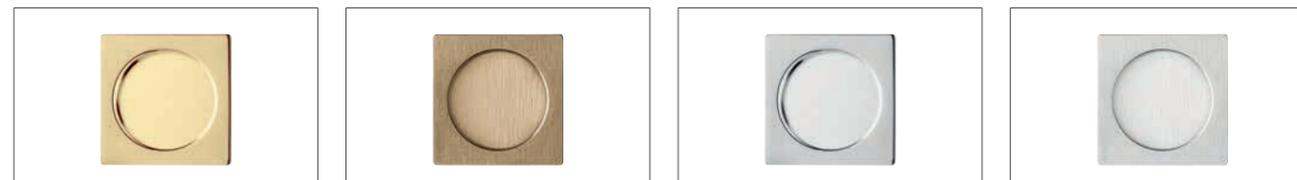


PAINTED POLISHED BRASS

ANTIQUÉ SMOKED BRASS

POLISHED CHROME

SATIN CHROME

KIT WITH LOCK AND KEYHOLE

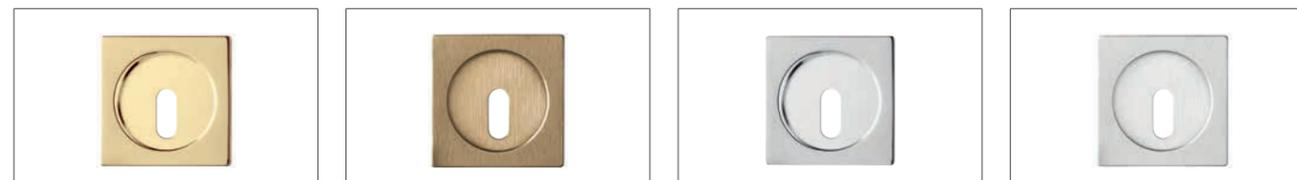

PAINTED POLISHED BRASS

ANTIQUÉ SMOKED BRASS

POLISHED CHROME

SATIN CHROME

KIT WITH LOCK AND THUMB TURN




PAINTED POLISHED BRASS

ANTIQUÉ SMOKED BRASS

POLISHED CHROME

SATIN CHROME

KIT WITH CYLINDER LOCK

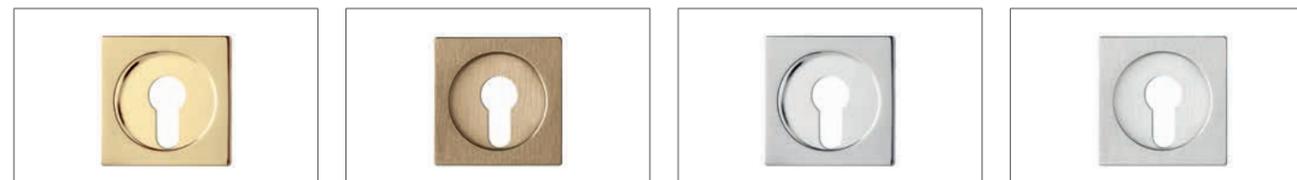

PAINTED POLISHED BRASS

ANTIQUÉ SMOKED BRASS

POLISHED CHROME

SATIN CHROME

HANDLES

FOR WOODEN DOORS - **SLIDING**

CASSIOPEA - ROUND

CASSIOPEA - SQUARE

KIT WITHOUT LOCK



SATIN CHROME



MATT WHITE RAL 9010



SATIN CHROME



MATT WHITE RAL 9010

KIT WITH LOCK AND KEYHOLE



SATIN CHROME



MATT WHITE RAL 9010



SATIN CHROME



MATT WHITE RAL 9010

KIT WITH LOCK AND THUMB TURN



SATIN CHROME



MATT WHITE RAL 9010



SATIN CHROME



MATT WHITE RAL 9010

40+one

KIT WITHOUT LOCK



CHAMPAGNE



BRONZE



TOBACCO



WHITE RAL 9010



SATIN CHROME

KIT WITH LOCK AND KEYHOLE



CHAMPAGNE



BRONZE



TOBACCO



WHITE RAL 9010



SATIN CHROME

KIT WITH LOCK AND THUMB TURN



CHAMPAGNE



BRONZE



TOBACCO



WHITE RAL 9010




SATIN CHROME

HANDLES

FOR WOODEN DOORS - **SLIDING**

PAIR OF BAR HANDLES WITH MATCHING COVER PLATES

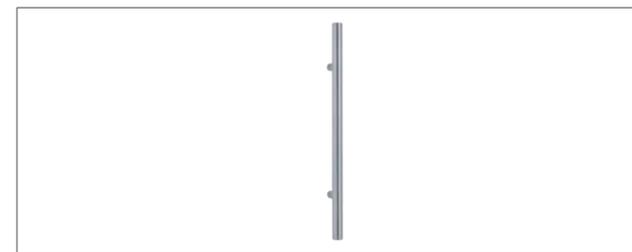
POLISHED STAINLESS STEEL - SATIN STAINLESS STEEL
Ø20x300x55 mm

POLISHED CHROME



SATIN CHROME

KNOBS FOR ECLISSE NOVENTA MODEL WITH LOCK KIT

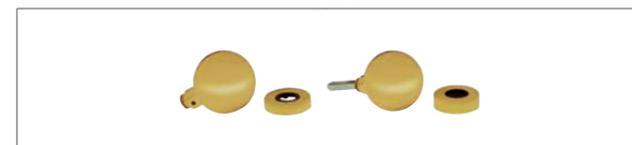

PAINTED POLISHED BRASS



SATIN CHROME BRASS

COVER PLATES



PAINTED POLISHED BRASS



ANTIQUÉ SMOKED BRASS



POLISHED CHROME



SATIN CHROME




WHITE



TITANIUM

DOOR PULL LEVER

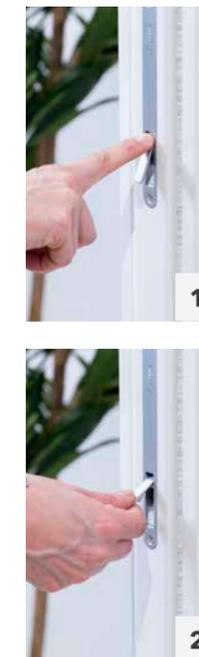

The new standard lock kit for all sliding door models, with ECLISSE branded plate and integrated pull lever, offers numerous advantages over the traditional finger pull:

- the comfort in gripping the door is much greater
- the door panel stop is neater and more elegant, without the hole of the finger pull above the plate
- in the double door models the absence of the protruding finger pull thickness allows the edges of the two sliding door panels to join perfectly, preventing any light from passing between the closed door panels.

HANDLES

FOR GLASS DOORS - **SLIDING**

STANDARD HANDLES

GLASS FUSED HANDLE
25x105x10* mm

SIROS LOCK KIT WITH OR WITHOUT CYLINDER**

POLISHED CHROME - SATIN CHROME
with cylinder 97x90x5* mmPOLISHED CHROME - SATIN CHROME
without cylinder 97x90x5* mm

PAIR OF BAR HANDLES

POLISHED STAINLESS STEEL - SATIN STAINLESS STEEL
Ø20x300x55* mm

NISÍ

POLISHED CHROME - SATIN CHROME
Ø50x4* mm

MYRTA

POLISHED CHROME - SATIN CHROME
50x50x10* mm

THERA

POLISHED CHROME - SATIN CHROME
70x100x4* mm

AYDIN

POLISHED CHROME - SATIN CHROME
50x152x6* mm

KOS

POLISHED CHROME - SATIN CHROME
Ø25x35* mm


NOTES

* Handles dimensions are indicated as WxH.

Dimensions with an asterisk indicate the handle protrusion from the glass, on each side.

** Not suitable for ECLISSE CLASSIC COLLECTION.

► SIROS without cylinder, NISÍ and THERA allow the glass panel to slide inside the wall completely.



HANDLES

FOR ECLISSE SYNTESIS® FLUSH WOODEN DOORS - **SLIDING - SWING**

WAVE

KIT WITHOUT LOCK



ANODIZED SILVER



SATIN CHROME



MATT BLACK



MATT WHITE

KIT WITH LOCK AND THUMB TURN



ANODIZED SILVER



SATIN CHROME



MATT BLACK



MATT WHITE

KIT WITH CYLINDER LOCK



ANODIZED SILVER



SATIN CHROME



MATT BLACK



MATT WHITE

NOTES

► The operation of handles is different for sliding and hinged doors.

HANDLES

FOR WOODEN DOORS - **SWING**


CASSIOPEA - ROUND

WITHOUT LOCK



SATIN CHROME

CASSIOPEA - SQUARE

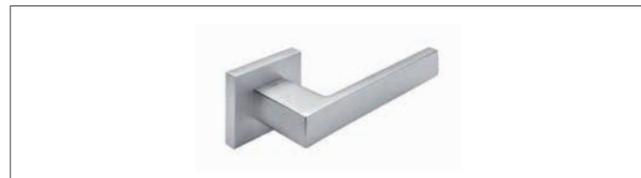


SATIN CHROME

WITH LOCK AND KEYHOLE



SATIN CHROME

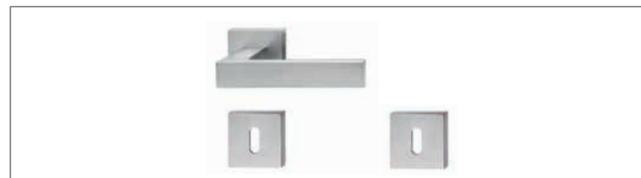

SATIN CHROME

WITH LOCK AND THUMB TURN



SATIN CHROME



SATIN CHROME

KIT WITH LOCK AND CYLINDER (not included)



SATIN CHROME



SATIN CHROME

HANDLES

FOR WOODEN DOORS - **SWING**

40+one

WITHOUT LOCK



CHAMPAGNE



BRONZE



TOBACCO



WHITE RAL 9010



SATIN CHROME

WITH LOCK AND KEYHOLE



CHAMPAGNE



BRONZE



TOBACCO



WHITE RAL 9010



SATIN CHROME

WITH LOCK AND THUMB TURN



CHAMPAGNE



BRONZE



TOBACCO



WHITE RAL 9010



SATIN CHROME

NOTES


- Before installing the handle, check that the diameter of the milled hole is \varnothing max. 21 mm. If the hole is smaller, adjust the diameter.

HANDLES

FOR WOODEN DOORS - SWING

PURE - Nuda Collection by Verum Italy

WITHOUT LOCK




SATIN CHROME



MATT WHITE RAL 9010

WITH LOCK AND KEYHOLE

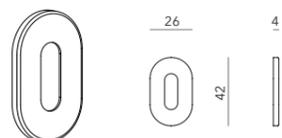


SATIN CHROME



MATT WHITE RAL 9010

WITH LOCK AND THUMB TURN

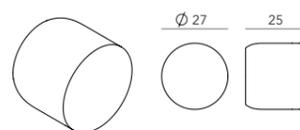

SATIN CHROME



MATT WHITE RAL 9010

NOTES

- Before installing the handle, check that the diameter of the milled hole is \varnothing max. 21 mm. If the hole is smaller, adjust the diameter.

HANDLES


FOR WOODEN DOORS - SWING

MAGNETIC LOCK FOR ECLISSE SYNTESIS® LINE BATTENTE* - BUTTON HANDLES (only for pull doors)

BRUSHED NICKEL

DOOR PULL ROUND HANDLES
 \varnothing 32 mm

WHITE

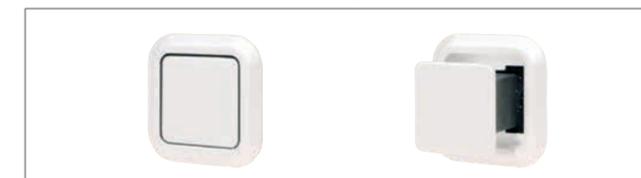DOOR PULL ROUND HANDLES
 \varnothing 32 mmDOOR PULL SQUARE HANDLES
30x30 mmDOOR PULL SQUARE HANDLES
30x30 mm

MAGNETIC LOCK FOR ECLISSE SYNTESIS® LINE BATTENTE* - PULL LEVER HANDLES

BRUSHED NICKEL

PULL LEVER HANDLES
30x60 mm

WHITE

PULL LEVER HANDLES
30x60 mm

NOTES


- **Pull handle:** only for the flush side.
On the other side of the door, the handle hole is covered by a paintable plastic sticker.
Not suitable for ECLISSE SYNTESIS® LINE BATTENTE DOUBLE.
- **Lever handle:** the milled hole is different from a standard handle hole.
Not suitable for ECLISSE SYNTESIS® LINE BATTENTE DOUBLE.
- * The strength of the magnetic lock is adjustable.

HANDLES

FOR GLASS ALUMINIUM DOORS - **SWING**


ZANTE

WITHOUT LOCK

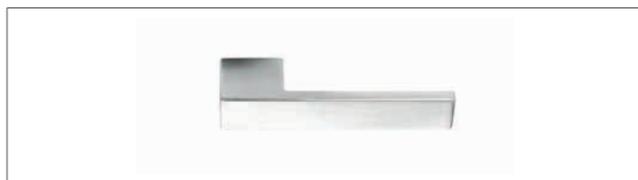

40+one

WITHOUT LOCK

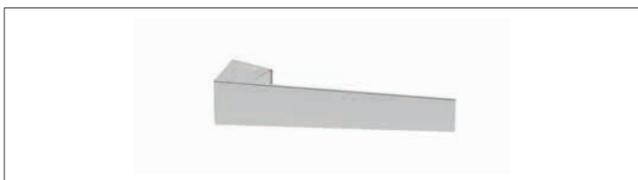

WITH THUMB TURN



WITH THUMB TURN



FINISHES



CHAMPAGNE



BRONZE



TOBACCO



WHITE RAL 9010



ALUMINIUM

HANDLES

FOR GLASS DOORS - **SWING - ECLISSE SYNTESIS® BATTENTE GLASS**

HANDLES AND LOCKS

SATIN CHROME



HANDLES ONLY



BLOCK ONLY*



BLOCK WITH THUMB TURN*



BLOCK FITTED FOR CYLINDER*



CYLINDER FOR GLASS

NOTES

Handles for glass aluminium doors - swing

- ▶ The handles are designed to match the chosen frame finish.
- ▶ Available only in combination with glass aluminium doors, cannot be sold separately.

Handles for glass doors - ECLISSE SYNTESIS® BATTENTE GLASS

- * Handles not included.

HANDLES

FOR FLUSH WALL CLOSURES


BUTTON HANDLES*

BRUSHED NICKEL



DOOR PULL ROUND HANDLES
Ø 32 mm

WHITE

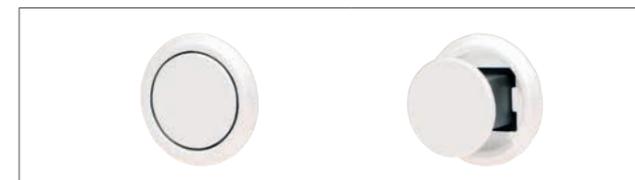

DOOR PULL ROUND HANDLES
Ø 32 mm



DOOR PULL SQUARE HANDLES
30x30 mm



DOOR PULL SQUARE HANDLES
30x30 mm



LEVER HANDLES

BRUSHED NICKEL



PULL LEVER HANDLES
30x60 mm

WHITE



PULL LEVER HANDLES
30x60 mm

HANDLES*

BRUSHED NICKEL



12x296x22 mm

WHITE



12x296x22 mm

KEY LOCK**

BRUSHED NICKEL



NOTES

- * Only for ECLISSE SYNTESIS® AREO.
- ** Only for ECLISSE SYNTESIS® TECH. Not suitable for double door models.

ACCESSORIES



Innovating means developing more targeted solutions, giving each customer exactly what it takes to make his daily life more comfortable. This is the reason why ECLISSE has designed and patented a series of accessories and automations that make each pocket door system unique.

ACCESSORIES

SYSTEMS AND AVAILABLE ACCESSORIES

	ECLISSE BIAS®	ECLISSE BIAS® DS	RALLENTY SOFT	SELF-CLOSING SYSTEM	DOUBLE DOOR CO-ORDINATION FOR CLASSIC
ECLISSE CLASSIC COLLECTION					
ECLISSE SINGLE	•	•	•	•	
ECLISSE DOUBLE	•	•	•		•
ECLISSE LUCE SINGLE	•	•	•	•	
ECLISSE LUCE DOUBLE	•	•	•		•
ECLISSE EWOLUTO® SINGLE	•	•	•		
ECLISSE EWOLUTO® DOUBLE	•	•	•		•
ECLISSE TELESCOPIC SINGLE	•		•		
ECLISSE TELESCOPIC DOUBLE	•		•		
ECLISSE CIRCULAR SINGLE					
ECLISSE CIRCULAR DOUBLE					
ECLISSE UNILATERAL	•	•	•	•	
ECLISSE NOVANTA					
ECLISSE SYNTESIS® FLUSH COLLECTION					
ECLISSE SYNTESIS® LINE SINGLE	•	•			
ECLISSE SYNTESIS® LINE DOUBLE	•	•			
ECLISSE SYNTESIS® LUCE SINGLE	•	•			
ECLISSE SYNTESIS® LUCE DOUBLE	•	•			
ECLISSE SYNTESIS® LINE BATTENTE SINGLE					
ECLISSE SYNTESIS® LINE BATTENTE DOUBLE					
ECLISSE 40 COLLECTION					
ECLISSE 40 SINGLE					
ECLISSE 40 DOUBLE					

	DOUBLE DOOR CO-ORDINATION FOR SYNTESIS® FLUSH	TELESCOPIC SYNCHRONISATION	ANTI-WARP PROFILE	E-MOTION	JOINING KIT FOR DOUBLE DOOR	ECLISSE PUSH&PULL C	ECLISSE PUSH&PULL S	BRACKETS AND CLAMPS FOR ECLISSE GLASS DOORS	VITRO Adapter for ECLISSE SYNTESIS® FLUSH glass pocket doors	DOOR CLOSER	SELF-CLOSING DOOR HINGE	ELECTRIC STRIKE
ECLISSE CLASSIC COLLECTION												
ECLISSE SINGLE			•	•	•	•	•	•				
ECLISSE DOUBLE			•	•		•	•	•				
ECLISSE LUCE SINGLE			•	•	•	•	•	•				
ECLISSE LUCE DOUBLE			•	•	•	•	•	•				
ECLISSE EWOLUTO® SINGLE			•	•		•	•	•				
ECLISSE EWOLUTO® DOUBLE			•	•		•	•	•				
ECLISSE TELESCOPIC SINGLE		•	•									
ECLISSE TELESCOPIC DOUBLE		•	•									
ECLISSE CIRCULAR SINGLE												
ECLISSE CIRCULAR DOUBLE												
ECLISSE UNILATERAL			•	•		•	•	•				
ECLISSE NOVANTA												
ECLISSE SYNTESIS® FLUSH COLLECTION												
ECLISSE SYNTESIS® LINE SINGLE			•				•	•	•			
ECLISSE SYNTESIS® LINE DOUBLE	•		•				•	•	•			
ECLISSE SYNTESIS® LUCE SINGLE			•				•	•	•			
ECLISSE SYNTESIS® LUCE DOUBLE	•		•				•	•	•			
ECLISSE SYNTESIS® LINE BATTENTE SINGLE										•	•	•
ECLISSE SYNTESIS® LINE BATTENTE DOUBLE										•	•	•
ECLISSE 40 COLLECTION												
ECLISSE 40 SINGLE											•	
ECLISSE 40 DOUBLE											•	

Thanks to ECLISSE's patented extractable track, accessories marked with a blue dot (•) can also be retrofitted on an already installed pocket door system.

ACCESSORIES

FOR ECLISSE SLIDING DOORS

ECLISSE BIAS®

**Built-In Anti-Slam.**

Soft close with anti-slam technology for single and double pocket doors.

This damper for sliding pocket doors, fully integrated inside the track and invisible from the outside, gently slows down and accompanies the door in the closing phase, with a smooth and quiet motion. It is equipped with an oil piston.

It ensures the perfect opening and closing of a door panel weighing up to 40 kg with a perfect scrolling. However, it offers good slowdown also for doors up to 100 kg.

Suitable for glass or wooden doors, it can be installed on every ECLISSE sliding pocket door system, except ECLISSE CIRCULAR and ECLISSE NOVANTA.

Available also in combination with the Ceiling Track.

ECLISSE BIAS® DS

**Built-In Anti-Slam Double Side.**


Bi-directional soft close with anti-slam technology for single and double pocket doors.

This bi-directional damper for sliding pocket doors, fully integrated inside the track and invisible from the outside, gently slows down and accompanies the door both in the opening and in the closing phases, with a smooth and quiet motion in both directions.

It ensures the perfect opening and closing of a door panel weighing up to 40 kg with a perfect scrolling. However, it offers good slowdown also for doors up to 100 kg.

Suitable for glass or wooden doors, it can be installed on every ECLISSE sliding pocket door system, except ECLISSE TELESCOPIC, ECLISSE CIRCULAR and ECLISSE NOVANTA. Available also in combination with the Ceiling Track. It is not compatible with ECLISSE PUSH&PULL.

Note: only for door panels with passage widths wider than 800 mm for the ECLISSE CLASSIC COLLECTION and wider than 700 mm for the ECLISSE SYNTESIS® FLUSH COLLECTION.

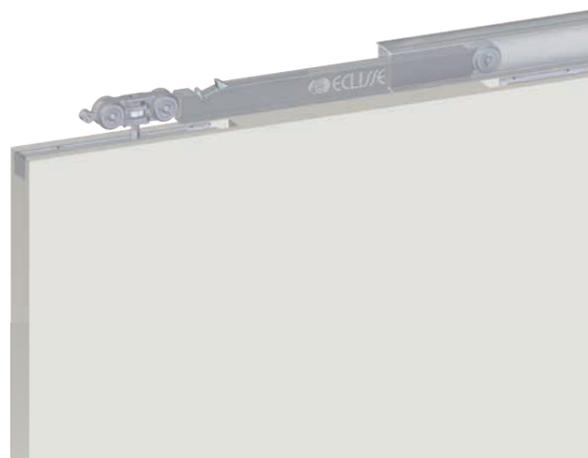

ACCESSORIES

FOR ECLISSE SLIDING DOORS

RALLENTY SOFT



The mechanical system that slows the door down for gentle closing, enhancing the comfort and functionality of the sliding pocket door.

Invisible from the outside, it is fixed to the door panel and can be retrofitted also with already installed counterframes.

It is available in three versions:

- with the SELF-CLOSING SYSTEM
- for door panels up to 40 kg
- for door panels over 40 kg and up to a maximum of 50 kg.

When installed in combination with the DOUBLE DOOR CO-ORDINATION FOR CLASSIC

- it slows down and gently closes door panels weighing up to 25+25 kg
- it slows down the closing movement of door panels weighing more than 25+25 kg (max. 50+50 kg).

Suitable for glass or wooden doors, it can be installed on models with jambs of the ECLISSE CLASSIC COLLECTION, except ECLISSE CIRCULAR and ECLISSE NOVANTA.



SELF-CLOSING SYSTEM



Thanks to the self-closing mechanism, once opened the door closes automatically. It is a mechanical system that can be installed also at a later time, on a pocket door system already mounted.

The mechanism is completely invisible from the outside and the door closing speed can be adjusted at any time without removing the door.

- ANTI-WARP PROFILE included.
- Max. door weight 40 kg.

For a smooth closing of the door, combination with RALLENTY SOFT is recommended.

Suitable for wooden doors only, it can be installed on ECLISSE SINGLE, ECLISSE LUCE SINGLE and ECLISSE UNILATERAL.

Note: using a self-closing system the actual passage size is reduced by 10 mm.



ACCESSORIES

FOR ECLISSE SLIDING DOORS

DOUBLE DOOR CO-ORDINATION FOR CLASSIC



The synchronised movement of double sliding pocket doors enables both door panels to be opened or closed together by moving only one panel.

- ECLISSE BIAS® included as standard.
For door panels up to 25+25 kg it slows down and gently closes the doors.
For door panels over 25+25 kg and up to 50+50 kg it slows down the closing movement.


Suitable for wooden doors only, it can be installed on ECLISSE DOUBLE, ECLISSE LUCE DOUBLE and ECLISSE EWOLUTO® DOUBLE with passage width from 600+600 mm to 1000+1000 mm.

Thanks to the ECLISSE patented extractable track, it can also be retrofitted to an already installed pocket door system.

Note: for pocket door systems with passage widths of 600+600 mm, the door panels protrude from the jambs so the actual passage width is reduced.



DOUBLE DOOR CO-ORDINATION FOR SYNTESIS® FLUSH

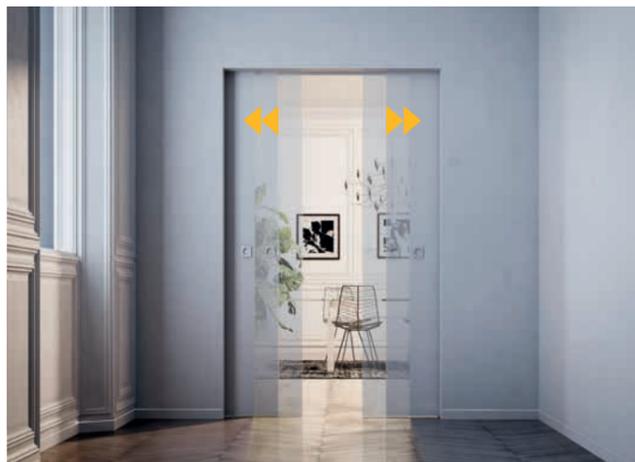

Specifically designed for sliding pocket door systems without jambs, this accessory allows to open and close the two doors simultaneously by moving only one door at a time.

- ECLISSE BIAS® included as standard.
For door panels up to 25+25 kg it slows down and gently closes the doors.
For door panels over 25+25 kg and up to 50+50 kg it slows down the closing movement.

Suitable for wooden doors only, it can be installed on ECLISSE SYNTESIS® LINE DOUBLE and ECLISSE SYNTESIS® LUCE DOUBLE with passage width from 600+600 mm to 1000+1000 mm.

Thanks to the ECLISSE patented extractable track, it can also be retrofitted to an already installed pocket door system.


Note: for pocket door systems with passage widths of 600+600 mm, the door panels protrude from the pocket so the actual passage width is reduced.



ACCESSORIES

FOR ECLISSE SLIDING DOORS

TELESCOPIC SYNCHRONISATION

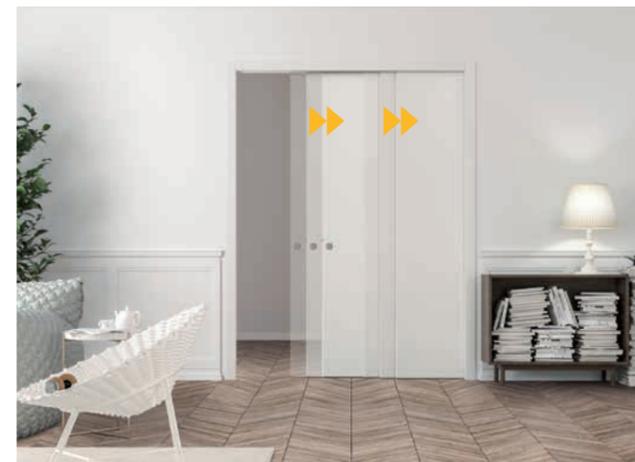

The synchronisation for telescopic sliding pocket door systems allows the simultaneous and harmonious movement of the two door panels which slide in the same direction, gently and without tearing: the first door panel drags the second one and the two panels slide together. It can be installed directly to the door panels with no need to replace the track.

- Max. door weight 40 kg.
- Compatible with ECLISSE BIAS®.
For door panels up to 25+25 kg it slows down and gently closes the doors.
For door panels over 25+25 kg and up to 50+50 kg it slows down the closing movement.
- ECLISSE TELESCOPIC DOUBLE requires 2 synchronisations and (optionally) 2 ECLISSE BIAS®.

Suitable for wooden doors only, it can be applied on ECLISSE TELESCOPIC SINGLE and ECLISSE TELESCOPIC DOUBLE with coupled door panels from 600+600 mm to 1200+1200 mm.

Note: when fully opened, the door panels protrude slightly from the jambs so the actual passage width is reduced.




ANTI-WARP PROFILE




ECLISSE offers an extruded aluminium guide section, specifically designed and developed to be fitted into the bottom of sliding pocket doors. This profile is easy to fit even on an already installed pocket door, requiring no special processing apart from a milled recess along the lower edge of the door panel. The technical performances offered by the anti-warp profile are an improved sliding action, an increased wear resistance and protection against deformation due to humidity.

The aluminium guide has been designed to fit perfectly the dimensions of the self-centering door guide that comes as standard with all ECLISSE counterframes.

To install it, simply adapt the milling to the profile size.



Detail of the door panel with standard door guide (milled only).



Detail of the door panel with anti-warp profile installed.

ACCESSORIES

FOR ECLISSE SLIDING DOORS

E-MOTION



E-MOTION is the linear motorised unit for ECLISSE sliding pocket doors: the door opens and closes by itself. The magnetic technology applied makes it very silent and easy to install. The motor unit is pre-assembled with power supply and switch cables, ready to be installed.

Plug&Play

Just connect the motor to the power supply (AC 230V) and operate the switch.

Self-setting

Once the motorisation is installed, the innovative electronic control system starts a self-setting process which senses passage size, weight and friction of the door, in order to set the opening-closing door cycle (speed and acceleration).

Adjustable

Once the self-setting and self-testing process is completed, it is always possible to modify the door opening speed, the opening time, and the sensitivity to obstacles.

Fitted as standard for the following functions.

- **Push&Go:** through a light manual impulse on the door handle, the system starts an opening cycle automatically.
- **Automatic:** an impulse from radar, switch or remote control opens the door completely; once opened, the door closes automatically.
- **Open:** selecting this mode, the door remains open; this function allows the manual opening of the door as well.
- **Manual:** in case of power failure, E-MOTION works in manual mode; the absence of mechanical elements still guarantees a slight and silent movement.

Optional fittings:

- radio remote control with receiver card
- active infrared sensor with variable detection area
- touch button
- electromechanical latch with radio remote control.

E-MOTION on single door models:

- ECLISSE SINGLE
 - ECLISSE LUCE SINGLE
 - ECLISSE UNILATERAL
 - ECLISSE EWOLUTO® SINGLE
- Passage sizes for single doors:
W = 700÷1300 mm
H = 1000÷2600 mm
 - **Max. door weight: 80 kg** (wooden or glass doors).
 - Finished wall thickness starting from 100 mm.

E-MOTION on double door models (2 motor units):

- ECLISSE DOUBLE
 - ECLISSE LUCE DOUBLE
 - ECLISSE EWOLUTO® DOUBLE
- Passage sizes for double doors:
W = 600+600÷1300+1300 mm
H = 1000÷2600 mm
(for W<700+700 mm the electronic unit is external).
 - **Max. door weight: 80 kg** (wooden or glass doors).
 - Finished wall thickness starting from 100 mm.

Note: when installed on already mounted counterframes the passage height is reduced by approx. 20 mm.

In choosing the size of a pocket door systems yet to be installed you can therefore decide to:

1. use a pocket door with a standard height from the price list but lose about 20 mm of passage height
2. use a specific counterframe, specifically built 25 mm higher than standard ones.

The option must be specified when ordering.

ACCESSORIES

FOR ECLISSE SLIDING DOORS

JOINING KIT FOR DOUBLE DOORS



The joining kit is a universal accessory that allows to get a double sliding pocket door system using two single systems.

Suitable for ECLISSE SINGLE and ECLISSE LUCE SINGLE, both for stud and solid wall versions.

Final passage width from 600+600 mm to 1000+1000 mm.

A double door system made by using two single door systems differs from a standard ECLISSE DOUBLE or ECLISSE LUCE DOUBLE as the passage width (see "L" in the size table of the model) increases by 50 mm.


This is why compensatory wooden profiles are needed.

COMPENSATORY WOODEN PROFILES



When a double sliding pocket door system is made by using two single ones, the passage size increases by 50 mm. This causes the total width of the installed doors, when closed, to not cover the whole passage size: closed door panels, joining in the middle of the doorway, completely come out of their pockets, leaving an empty space between the jambs and the rear edge of the door.

The compensatory wooden profiles installed between the vertical bars of the counterframe and the jambs will fill the gap, reducing the passage size "L" to a standard width.

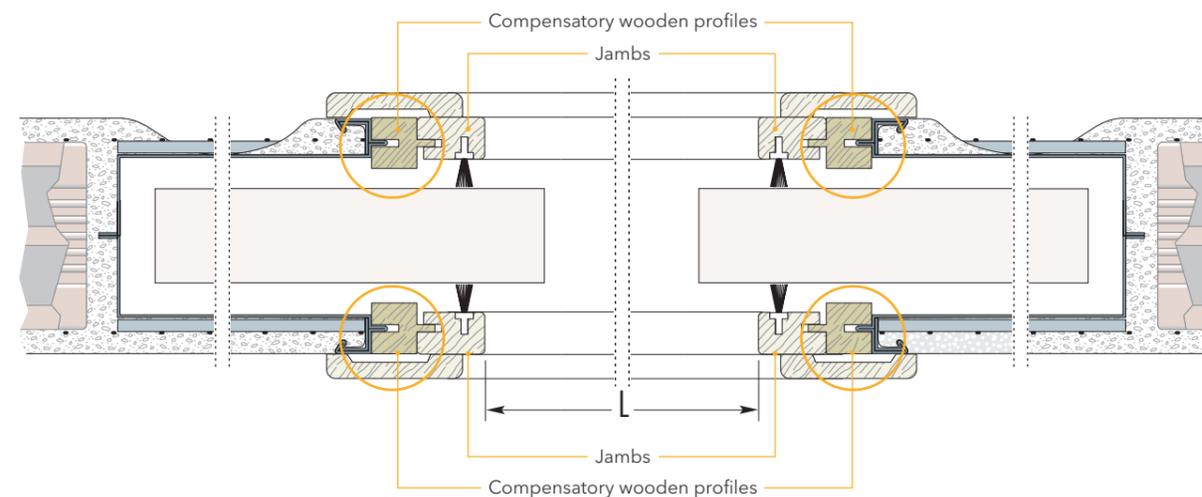

ACCESSORIES

FOR ECLISSE SLIDING DOORS

CEILING TRACK



ECLISSE developed a new sliding system that allows to divide two rooms with large opening. The multi-slide hardware set for ceiling mounted sliding door systems allows for the installation of door panels up to the ceiling height.

Made of anodized aluminium, it is fixed to the ceiling with brackets and allows to give a flush finish to the ceiling. It has a decentralized door guide and door dragging system.

SINGLE



DOUBLE



TRIPLE



NOTES

- ▶ Possibility to install ECLISSE BIAS® and ECLISSE BIAS® DS.
- ▶ Available also for door panels up to 150 kg.
- ▶ Available in bars from 2000 mm to 6000 mm.
- ▶ Only for wooden doors.
- ▶ Door thickness from 40 mm to 44 mm.

ACCESSORIES


FOR ECLISSE SLIDING DOORS

EXPOSED SLIDING DOOR KIT



ECLISSE also offers a kit for sliding door that runs outside the wall. Designed to save space with a sliding door without intervening on the existing wall, this kit is a functional and practical solution. Its manufacturing technology is the same you find in all ECLISSE pocket door systems, guarantee of a tested, safe and easy to install product.

The exposed sliding door kit only includes the hardware components: track, runners, brackets, door stop, door guide and track fixing brackets. Door panel and pelmet are not included.

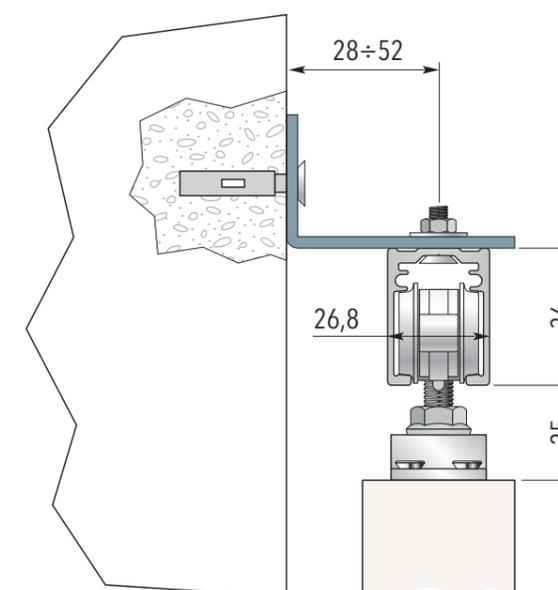

ACCESSORIES

FOR ECLISSE SLIDING DOORS

ECLISSE PUSH&PULL



ECLISSE PUSH&PULL is the exclusive accessory for sliding pocket door systems which allows the door panel to be pulled out of the door pocket with a light pressure. This makes it easier to grip the door and makes it, therefore, handier to close.

Suitable for both wooden and glass doors, thanks to the extractable track patented by ECLISSE it can be installed on an already mounted counterframe too.

It can be combined with ECLISSE BIAS®, not with ECLISSE BIAS® DS, DOUBLE DOOR CO-ORDINATION FOR CLASSIC or DOUBLE DOOR CO-ORDINATION FOR SYNTESIS® FLUSH.

Note: double door models require an accessory for each door panel.

ECLISSE PUSH&PULL C



ECLISSE PUSH&PULL C is suitable for models of the ECLISSE CLASSIC COLLECTION, except for ECLISSE TELESCOPIC, ECLISSE CIRCULAR and ECLISSE NOVANTA.

- Passage width for single door: 600÷1200 mm.
- Passage width for double door: 600+600÷1200+1200 mm.
- Max. door weight: 50 kg.

ECLISSE PUSH&PULL S



ECLISSE PUSH&PULL S is suitable for all sliding models of the ECLISSE SYNTESIS® FLUSH COLLECTION.

- Passage width for single door: 600÷1300 mm.
- Passage width for double door: 600+600÷1300+1300 mm.
- Max. door weight: 50 kg.

ACCESSORIES

FOR ECLISSE SLIDING DOORS

SUPPORTS FOR GLASS DOORS



Brackets: standard with ECLISSE glass doors.

- Max. door panel weight: 100 kg.
- Dimensions in mm: W 100 x H 35 x Thk 26
- Glass thickness 10 mm.

Note: they require two "dovetail" milling incisions on top of the door panel.



Clamps: optional system, they are applied directly onto the glass panel without any previous processing.

- Max. door panel weight: 80 kg.
- Dimensions in mm: W 145 x H 45 x Thk 27
- Glass thickness 8-10 mm.

VITRO - Adapter for ECLISSE SYNTESIS® FLUSH glass doors



Vitro is the adapter for glass doors installed on sliding models of the ECLISSE SYNTESIS® FLUSH COLLECTION. It can also be used with doors not supplied by ECLISSE.

The kit consists of:

- a small stainless steel veil (1)
- a stop jamb adapter coated in paintable PVC (2)
- two aluminium brush holders coated in paintable PVC (3)
- a specific door guide for glass panels (4).

The veil is available for:

- ECLISSE brackets (veil height H 57 mm)
- ECLISSE clamps (veil height H 63 mm).

ECLISSE glass doors for SYNTESIS® FLUSH models are supplied as standard with brackets and Vitro adapter with reduced veil (H 30 mm).

Vitro can only be combined with glass door panels up to a max. thickness of 10 mm, without fused glass applications or protruding decorations.

ACCESSORIES

FOR ECLISSE SWING DOORS

DOOR CLOSER



Completely invisible from the outside, it is installed into the door panel while the opening arm is fixed to the frame. It requires a milling to be machined on the header of the frame and on the upper edge of the door panel.

When placing the order, two specifications are also necessary:

- with or without hold open
- right-hand or left-hand.

SELF-CLOSING DOOR HINGE



The new ECLISSE self-closing door hinge is a soft-closing mechanism that gently closes flush-to-the-wall wooden hinged doors. Integrated in the central hinge, it is totally concealed and it enhance the aesthetic of the door considerably. It is fitted inside the door panel and it requires a designated milling, to be machined by the installer. Easy to install, it is adjustable in the 3 axes. The hydraulic adjustment of the closing speed guarantees the correct closure of door panels up to 45 kg.

Hinges and hinge covers are available in the following colours: Champagne, Bronze, Tobacco, White and aluminium chrome.

ELECTRIC STRIKE



The electric strike for hinged door is an access control device for opening doors via an electric impulse that unlocks the lock. The activation mechanism (magnetic card, push-button, etc.) is not included.

The device requires the installation of a cylinder lock so that the door can be opened in the event of a power outage.

Jointly to the order placement, the following items are required to be included in the order:

- specifically machined door frame
- specifically machined door panel
- specific fittings, prepared for cylinder lock.

Recommended in combination with a moving handle and fixed knob combination.


Note: cannot be used with frames already installed.



HARDWARE

FOR ECLISSE SWING DOORS

HARDWARE FOR ECLISSE SYNTESIS® LINE BATTENTE

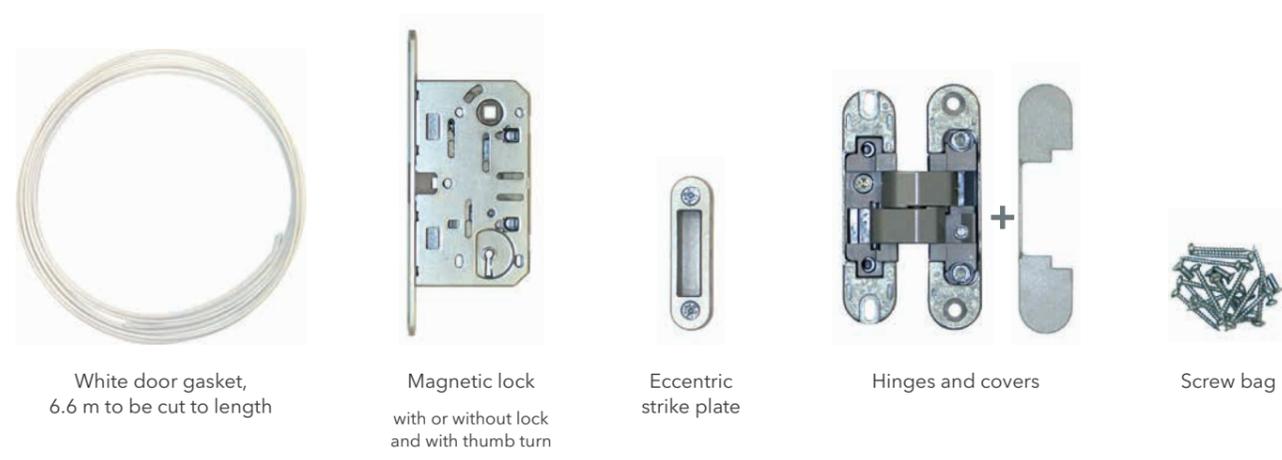

White door gasket, 6.6 m to be cut to length

Magnetic lock with or without lock and with thumb turn

Eccentric strike plate

Hinges and covers

Screw bag

HARDWARE FOR ECLISSE 40



Black door gasket, 6.6 m to be cut to length white for the primer-coated frame

Magnetic lock with or without lock and with thumb turn

Eccentric strike plate satin chrome for the primer-coated frame

Hinges and covers colors matching the available frame finishes

Screw bag

HARDWARE FINISHES



CHAMPAGNE

BRONZE

TOBACCO

WHITE RAL 9010

ALUMINIUM CHROME

WARRANTY GENERAL INFORMATION

1. SCOPE AND WARRANTY PERIOD

1.1 **ECLISSE S.r.l.**, a company with its registered office at Via Giovanni Pascoli, 7 - 31053 Pieve di Soligo (TV) - Certified e-mail (PEC): eclisse@pec.tuni.it, (hereinafter referred to ECLISSE) grants to the end-user, in addition to the warranty provided for by law, an additional warranty (hereinafter, the Warranty) in relation to the following ECLISSE branded **Products:**

	Warranty Period
a) Sliding pocket door systems - metallic parts of the pocket-frame in galvanised steel or aluminium - runners - sliding tracks in anodised aluminium alloy 6060 (10 µm)	12 years, from the date of purchase
b) Frames for swing doors - metallic parts of the frame in anodised aluminium	12 years, from the date of purchase
c) Frames for flush wall closures - metallic parts of the frame in anodised aluminium	12 years, from the date of purchase

With respect to all other products sold by ECLISSE, the statutory warranty shall apply.

1.2 The rights under this Warranty shall not prejudice but are in addition to the rights granted by law to end-users arising from the purchase of an ECLISSE product.

1.3 "End user" means the natural or legal person who owns the ECLISSE product and has not purchased it for the purpose of resale.

1.4 This version of the ECLISSE Product Warranty shall apply as from **01/06/2022**.

2. WHAT IS COVERED BY THE WARRANTY AND AVAILABLE REMEDIES

This Warranty is valid and covers defects arising from the design and workmanship of the product, including the materials used in its manufacture.

During the valid Warranty period and subject to the conditions provided therein, upon ascertaining the existence of the reported defect, ECLISSE undertakes to replace or repair free of charge, at its own discretion, the parts, components and/or accessories that are found to be defective. Replacement components shall be delivered free of shipping charges ex reseller.



Sliding pocket door systems

ECLISSE s.r.l. - Via Giovanni Pascoli, 7 - 31053 Pieve di Soligo (Treviso) - Italy - Tel: +39 0438 980513 - Fax: +39 0438 980804
CF - PI 02141960266 - Cap. Soc. Euro 1.000.000 i.v. - Mecc. TV 029785 - Codice CEE / IT 02141960266 - R.E.A. di TV 191117
eclisse@eclisse.it - eclisse@pec.tuni.it - www.eclisseworld.com

3. WHAT IS NOT COVERED BY THE WARRANTY

This Warranty shall not apply in cases where the defect results directly or indirectly from:

- accidental breakage due to damage or distortion caused by impacts or pressure during transport;
- incorrect installation or assembly of the Products (e.g. the assembly instructions contained in all the packaging of the Products are not followed or the installation is not carried out in a workmanlike manner);
- installation of the Products in locations that do not comply with the specifications provided by ECLISSE;
- aesthetic factors (e.g. buckling, bending or repairs as a result of incorrect installation);
- improper or non-conforming use of the products with respect to the instructions provided by ECLISSE (e.g. any form of improper handling, non-compliance with the requirements set out in the Product maintenance instructions and/or data sheets);
- construction defects or faulty construction design (e.g. structural damage due to subsidence of the wall structure), for which ECLISSE is not responsible;
- tampering, modifications, customisations, adjustments or repairs of the Product (or its components thereof) carried out by unauthorised personnel;
- use of non-compatible spare parts or accessories (e.g. runners and/or sliding rails);
- changes that the materials used are naturally subject to;
- deterioration due to sunlight, condensation, acid rain, salt water splashes or other circumstances that have a corrosive or modifying effect on the materials.

This Warranty is without prejudice to the rights of the end-user, and under which any attempt to limit or exclude the liability of ECLISSE would be ineffective. It is understood that ECLISSE does not accept any liability under this Warranty or otherwise for any loss of profit or any loss arising, whether directly or indirectly, from or in connection with a claim made under this Warranty.

ECLISSE shall not be liable for any losses caused directly or indirectly by events beyond ECLISSE's control (e.g. trade union disputes, fires, wars, acts of terrorism, import restrictions, political uprisings, natural events, vandalism and other circumstances of force majeure). ECLISSE shall not be liable for products of third parties which, even if sold or displayed together with the ECLISSE's products, are not covered by the Warranty.

Furthermore, the use and/or installation of defective Products shall preclude the right to make complaints or claims.

Any components that are replaced or repaired during the initial warranty period (paragraph 1.1), shall be covered by a warranty for the same period as this warranty (12 years for sliding pocket door systems, frames for swing doors, frames for space saving doors and aesthetic doors and equal to the term of the statutory warranty with respect to all other products). All components that are replaced or repaired after the initial warranty period shall be covered by a warranty for the same term as the statutory warranty.



Sliding pocket door systems

ECLISSE s.r.l. - Via Giovanni Pascoli, 7 - 31053 Pieve di Soligo (Treviso) - Italy - Tel: +39 0438 980513 - Fax: +39 0438 980804
CF - PI 02141960266 - Cap. Soc. Euro 1.000.000 i.v. - Mecc. TV 029785 - Codice CEE / IT 02141960266 - R.E.A. di TV 191117
eclisse@eclisse.it - eclisse@pec.tuni.it - www.eclisseworld.com

ECLISSE WARRANTY

4. WARRANTY CLAIM PROCEDURE

To claim under the Warranty, the end-user shall promptly report the defect by providing evidence (e.g. by making available the part whose non-conformity is alleged or by sending videos and/or photographs) solely and exclusively to the reseller from which the ECLISSE Product was purchased. The reseller shall, within 8 (eight) days, report the defect to ECLISSE which, having acknowledged the evidence provided, shall carry out the necessary checks and take decisions regarding the request for the repair or replacement of the Product.

In the event that the reseller from which the ECLISSE Product was purchased is no longer an ECLISSE reseller, please contact ECLISSE directly for the names of the nearest resellers.

The Warranty Period shall start on the date that the ECLISSE Product is purchased from an ECLISSE reseller, which should be evidenced by the original receipt/tax receipt or invoice issued by the reseller. If the purchase cannot be proven, the Warranty Period shall start from the date of manufacture.

ECLISSE S.r.l.

Via Giovanni Pascoli, 7
31053 Pieve di Soligo (Treviso)
ITALY

Telephone: 0039 0438 980513
Website: www.eclisseworld.com
Certified e-mail (PEC): eclisse@pec.tuni.it
E-mail: service@eclisse.it



Sliding pocket door systems

ECLISSE s.r.l. - Via Giovanni Pascoli, 7 - 31053 Pieve di Soligo (Treviso) - Italy - Tel: +39 0438 980513 - Fax: +39 0438 980804
CF - PI 02141960266 - Cap. Soc. Euro 1.000.000 i.v. - Mecc. TV 029785 - Codice CEE / IT 02141960266 - R.E.A. di TV 191117
eclisse@eclisse.it - eclisse@pec.tuni.it - www.eclisseworld.com

© 2022 ECLISSE, all rights reserved. The use, filing and total or partial reproduction, using any mechanical or electronic means, of texts, drawings and pictures contained in this publication is strictly prohibited, unless specifically approved in writing by ECLISSE.
All pictures and drawings are for illustrative purposes only. ECLISSE s.r.l. reserves the right to make changes in order to improve the product specifications without notice. We may change the content of this catalogue, so if you have any queries related to the products you can contact our call center. ECLISSE refuses any responsibility for misprints, clerical errors or for any other reason.



Via Giovanni Pascoli, 7 - 31053 Pieve di Soligo TV - Italy - Tel. +39 0438 985749
international.sales@eclisse.it - www.eclisse.com