
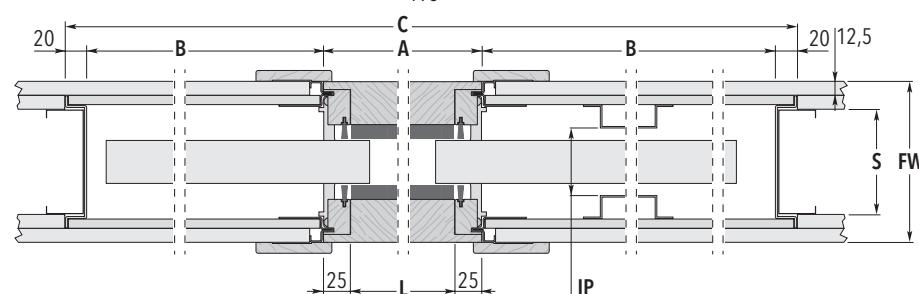
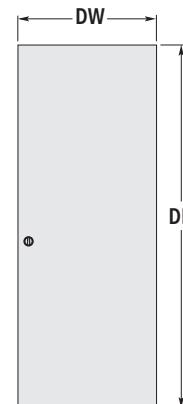
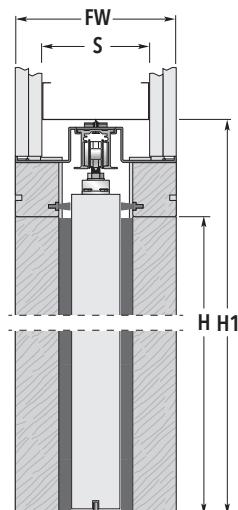


ECLISSE LUCE DOUBLE

STUD WALL

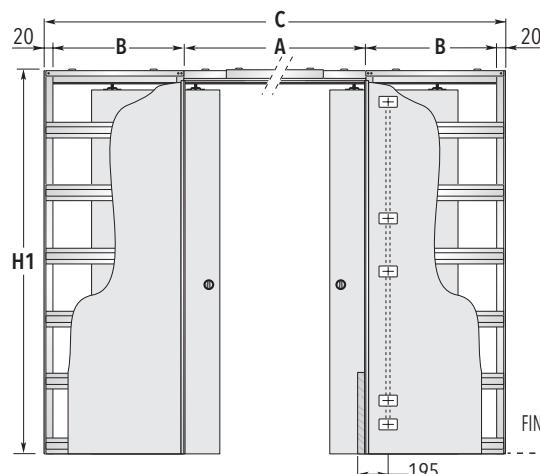

SYSTEMS FOR DOUBLE DOOR - Measures related to Italian standards, other dimensions available


PASSAGE SIZE L x H	OVERALL DIMENSIONS C x H1	DOOR PANEL*			
		A	B	DW	DH
1200 x 2000/2100	2520 x 2090/2190	1250	615	615 ÷ 635	2010/2110
1300 x 2000/2100	2820 x 2090/2190	1350	715	665 ÷ 735	2010/2110
1400 x 2000/2100	2920 x 2090/2190	1450	715	715 ÷ 735	2010/2110
1500 x 2000/2100	3220 x 2090/2190	1550	815	765 ÷ 835	2010/2110
1600 x 2000/2100	3320 x 2090/2190	1650	815	815 ÷ 835	2010/2110
1700 x 2000/2100	3620 x 2090/2190	1750	915	865 ÷ 935	2010/2110
1800 x 2000/2100	3720 x 2090/2190	1850	915	915 ÷ 935	2010/2110
1900 x 2000/2100	4020 x 2090/2190	1950	1015	965 ÷ 1035	2010/2110
2000 x 2000/2100	4120 x 2090/2190	2050	1015	1015 ÷ 1035	2010/2110
FINISHED WALL = FW		STUDWORK = S		INTERNAL PASSAGE = IP	
150	→	100 one plasterboard layer, two on the studwork		62	

Dimensions are given in mm

NON-STANDARD SIZES	NOTES	ACCESSORIES
<ul style="list-style-type: none"> Passage width 600+600÷1300+1300 mm. Passage height 1000÷2600 mm. 	<ul style="list-style-type: none"> Max. door thickness 45 mm (including any glass holder for glazed door). Max. door weight 100 kg (150 kg on request). Max. electrical box depth 40 mm (2 boxes are supplied if wiring-ready on one pocket; 4 boxes if wiring-ready on both pockets). Non-standard positions for the electrical boxes are possible (subject to the approval of our Technical Dept.). ECLISSE counterframes can host any sliding door panel of standard dimensions available on the market. Install at finished floor level. <p>* Listed measures refers to wooden door panels only.</p>	<ul style="list-style-type: none"> Double door co-ordination for CLASSIC ECLISSE BIAS® ECLISSE BIAS® DS ECLISSE PUSH&PULL C Motorisation Anti-warp profile

ECLISSE LUCE DOUBLE

STUD WALL

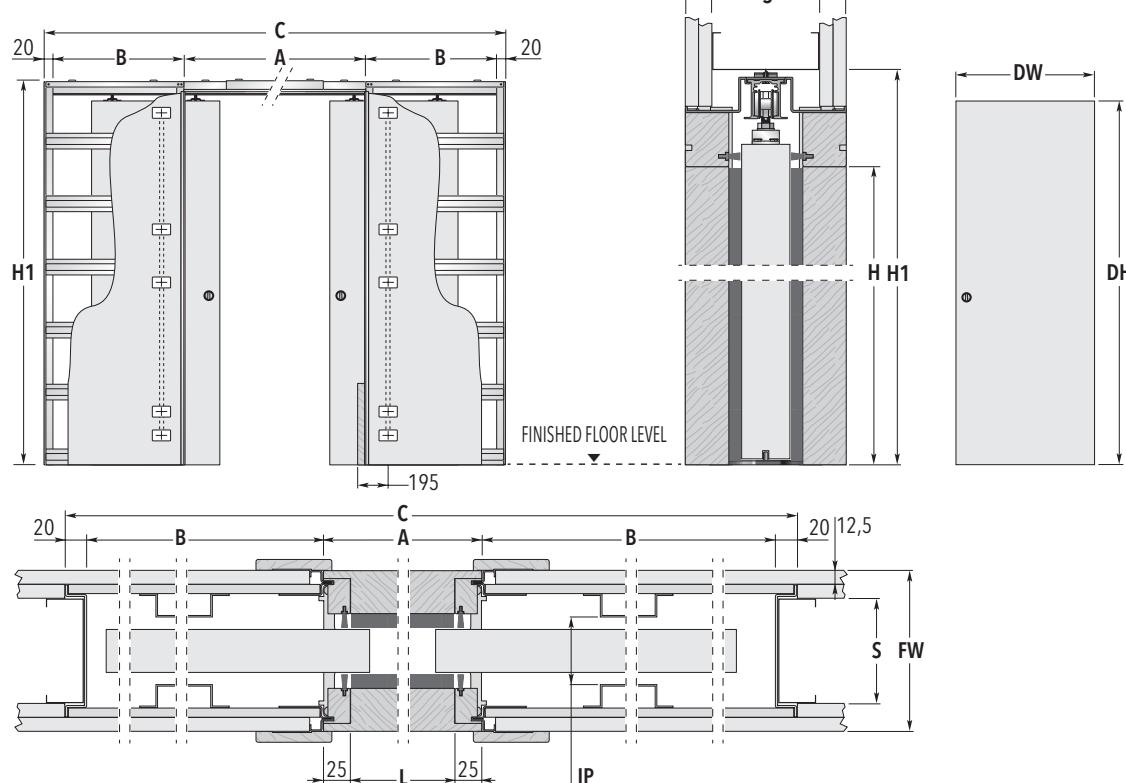

SYSTEMS FOR DOUBLE DOOR - Measures related to Italian standards, other dimensions available

PASSAGE SIZE L x H	OVERALL DIMENSIONS C x H1	DOOR PANEL*			
		A	B	DW	DH
1200 x 2000/2100	2520 x 2090/2190	1250	615	615 ÷ 635	2010/2110
1300 x 2000/2100	2820 x 2090/2190	1350	715	665 ÷ 735	2010/2110
1400 x 2000/2100	2920 x 2090/2190	1450	715	715 ÷ 735	2010/2110
1500 x 2000/2100	3220 x 2090/2190	1550	815	765 ÷ 835	2010/2110
1600 x 2000/2100	3320 x 2090/2190	1650	815	815 ÷ 835	2010/2110
1700 x 2000/2100	3620 x 2090/2190	1750	915	865 ÷ 935	2010/2110
1800 x 2000/2100	3720 x 2090/2190	1850	915	915 ÷ 935	2010/2110
1900 x 2000/2100	4020 x 2090/2190	1950	1015	965 ÷ 1035	2010/2110
2000 x 2000/2100	4120 x 2090/2190	2050	1015	1015 ÷ 1035	2010/2110
FINISHED WALL = FW		STUDWORK = S		INTERNAL PASSAGE = IP	
150	→	100	one plasterboard layer, two on the studwork	62	

Dimensions are given in mm

NON-STANDARD SIZES	NOTES	ACCESSORIES
<ul style="list-style-type: none"> Passage width 600+600÷1300+1300 mm. Passage height 1000÷2600 mm. 	<ul style="list-style-type: none"> Max. door thickness 45 mm (including any glass holder for glazed door). Max. door weight 100 kg (150 kg on request). Max. electrical box depth 40 mm (2 boxes are supplied if wiring-ready on one pocket; 4 boxes if wiring-ready on both pockets). Non-standard positions for the electrical boxes are possible (subject to the approval of our Technical Dept.). ECLISSE counterframes can host any sliding door panel of standard dimensions available on the market. Install at finished floor level. <p>* Listed measures refers to wooden door panels only.</p>	<ul style="list-style-type: none"> Double door co-ordination for CLASSIC ECLISSE BIAS® ECLISSE BIAS® DS ECLISSE PUSH&PULL C Motorisation Anti-warp profile