ECLISSE SYNTESIS® LINE BATTENTE


with ELECTRIC STRIKE - PRIMER-COATED ANODISED ALUMINIUM FRAME



The electric strike for hinged door is an access control device for opening doors via an electric impulse that releases the lock.

The device requires the installation of a cylinder lock so that the door can be opened in the event of a power outage.

The activation mechanism (magnetic card, push-button, etc.) is not included.

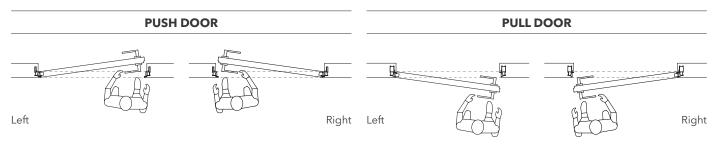

NOTES

- ► Available with or without header (same price).
- ▶ Supplied as standard with 3 hinges. Max. door panel weight with 3 hinges: 50 kg.
- ▶ Available upon request with 4 hinges. Max. door panel weight with 4 hinges: 65 kg.
- ► Combination with the handle+knob set is recommended.
- Activation mechanism (magnetic card, push-button, etc.) not included.
- ► Install at finished floor level.

