


# ECLISSE TELESCOPIC DOUBLE

SOLID WALL

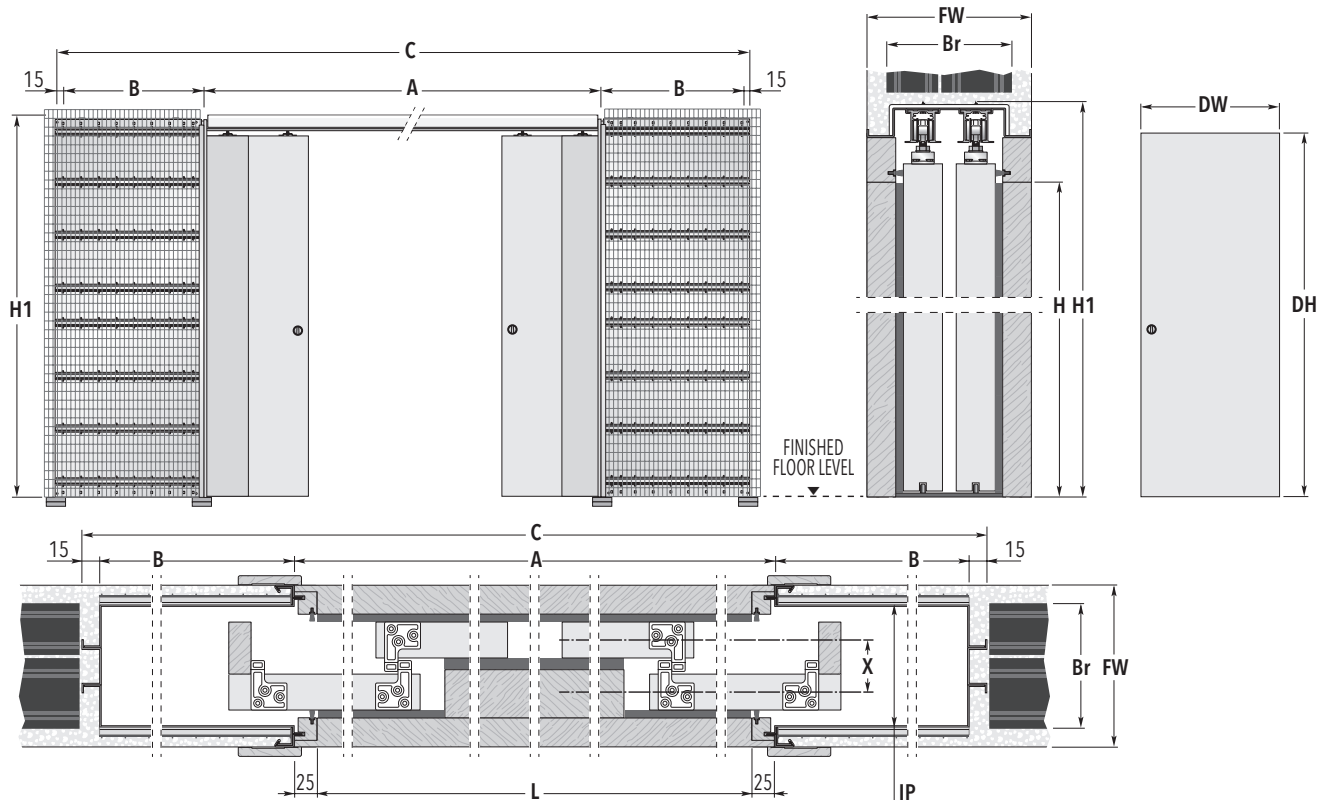

## SYSTEMS FOR 2+2 PARALLEL DOORS - Measures related to Italian standards, other dimensions available

PASSAGE SIZE <b>L x H</b>	OVERALL DIMENSIONS			DOOR PANEL*	
	<b>C x H1</b>	<b>A</b>	<b>B</b>	<b>DW</b>	<b>DH</b>
2300 x 2000/2100	3630 x 2090/2190	2350	625	615 ÷ 635	2010/2110
2700 x 2000/2100	4230 x 2090/2190	2750	725	715 ÷ 735	2010/2110
3100 x 2000/2100	4830 x 2090/2190	3150	825	815 ÷ 835	2010/2110
3500 x 2000/2100	5430 x 2090/2190	3550	925	915 ÷ 935	2010/2110
3900 x 2000/2100	6030 x 2090/2190	3950	1025	1015 ÷ 1035	2010/2110
4300 x 2000/2100	6630 x 2090/2190	4350	1125	1115 ÷ 1135	2010/2110
4700 x 2000/2100	7230 x 2090/2190	4750	1225	1215 ÷ 1235	2010/2110

FINISHED WALL = <b>FW</b>	BRICKS = <b>Br</b>	INTERNAL PASSAGE = <b>IP</b>	<b>X</b>
<b>150</b> →	120	114	48
<b>180</b> →	80+60	144	58

Dimensions are given in mm

### NON-STANDARD SIZES

- ▶ Passage width 2300÷4700 mm.
- ▶ Passage height 1000÷2600 mm.

### NOTES

- ▶ Max. door thickness 43 mm for FW=180 mm and 40 mm for FW=150 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg.
- ▶ When fully open, the door panels will protrude slightly from the jambs, so the passage width is reduced.
- ▶ ECLISSE counterframes can host any sliding door panel of standard dimensions available on the market.
- ▶ Install at finished floor level.
- \* Listed measures refers to wooden door panels only.

### ACCESSORIES

- ▶ Telescopic synchronisation
- ▶ ECLISSE BIAS®
- ▶ Anti-warp profile